

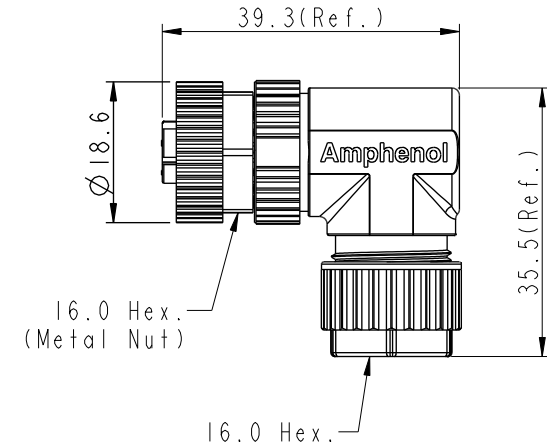




REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	C201469	2020/09/25	Ruru	 X2
C	C210561	2021/04/12	Vicky	 X2
D	C221877	2022/12/09	Ruru	 X1

MI2D-XXBFFA-SR7001


XX: No. Of Pin



4P

Pin Assignments Front View

UNIT: mm




TOLERANCE	
.X	± 0.25
.XX	± 0.1
.XXX	± 0.05
ANGLES	$\pm 1^{\circ}$

TITLE	N SEN, MI2 D, SCREW CABLE W/O SR, F, F, FI SOLDER
-------	--



SCALE	1 : 1	SIZE	A4	SHEET	1	OF	1
-------	-------	------	----	-------	---	----	---

REV.	D	WC-REV.	A.5	QC: Inspection i
------	---	---------	-----	------------------

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY	DATE
	JC Chen	2020-04-17
DWG. NO	CHECKED BY	DATE
 MI2D-XXBFFA-SR7001	Li Feng	2020-04-17
CUSTOMER	APPROVED BY	DATE
ALTW	Jerry	2020-04-17

△C
Note:

- * RoHS Compliant
- *  Important Dimension
- *  Waterproof rate: IP67, mated
- * Connector

Housing: Thermoplastic, Black
Pin: Copper alloy, Gold plated
Extension Nut: Thermoplastic, Black
Nut: Metal
O-Ring: Rubber, Gray

- * Clamp Ring: Thermoplastic, Black
- * Sealing Nut: Thermoplastic, Black
- * Seal: Rubber, Gray, OD: $\varnothing 4.0\text{mm} \sim \varnothing 7.0\text{mm}$
- * One set unassembled in one pe bag