


REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	LE3-030090~93	2010/03/04	Tina	Change Conn.1&Conn.2
C	LEN1670084~087	2016/06/30	Vicky	Update Logo


THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.



PC-000505-0MM-CSBXX
 XX:01~99Meters
 01:01Meter
 02:02Meters
 :
 :
 99:99Meters
 Cable Length(L):01~99Meters

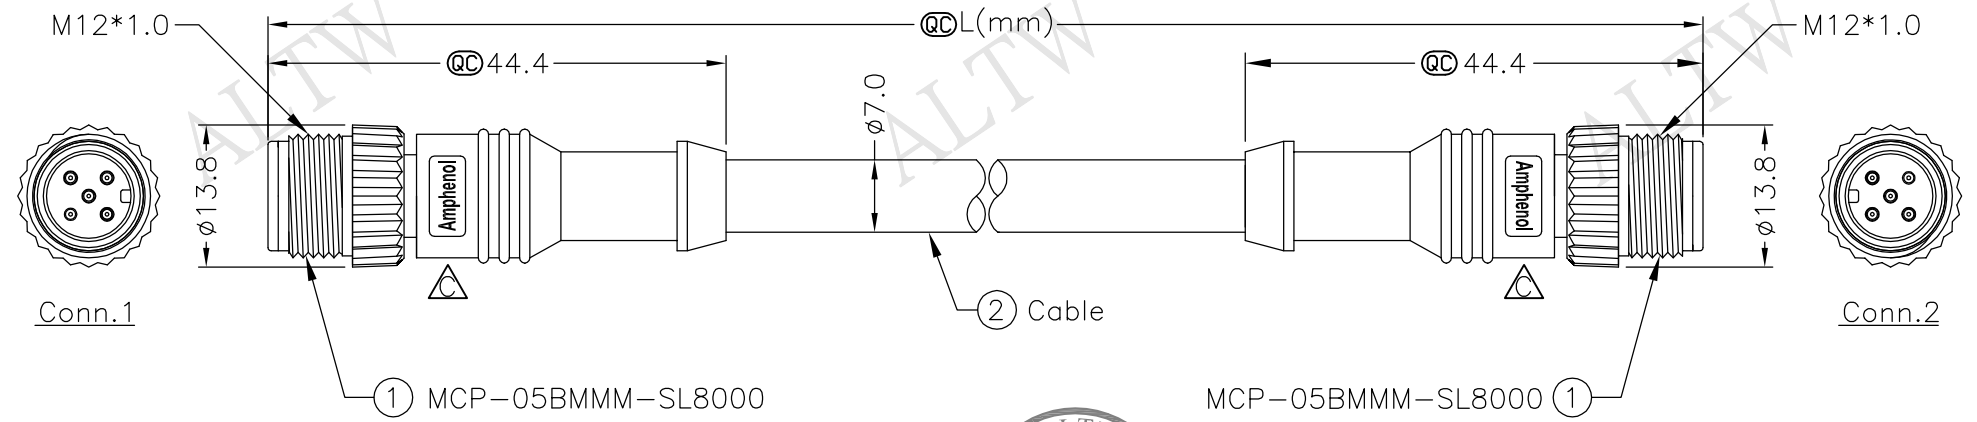

- Note:
- * QC Important Dimension.
 - * Waterproof Rate: IP68
 - * Connector: Polyurethane (PU), Black
 - * Male Pin: Copper Alloy, Gold Plated
 - * Cable: Black, (22#*1P+A)+(18#*1P+A)+Drain+AL.Mylar+Braid PVC UV Cable OD=7.0mm
 - * Cable Length Tolerance: 1M:±40mm
 02M~05M:±60mm
 06M~10M:±100mm
 11M~30M:±200mm
 31M~99M:±500mm



5	Blue 藍 (22AWG)	5	Twist
4	White 白 (22AWG)	4	
3	Black 黑 (18AWG)	3	Twist
2	Red 紅 (18AWG)	2	
1	Drain 地線 (22AWG)	1	
Conn.1	Wire Color	Conn.2	
Pin Out			

UNIT:mm	
±0.5 mm	

TITLE M12P Conn NMEA I Adapt Screw MM Conn MM Pin	
SCALE Free	SHEET 1 OF 1
REV. C	SIZE A4
QC :Inspection Item	

Amphenol LTW
 安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY Vicky	DATE 2016/06/30
DWG NO PC-000505-0MM-CSBXX	CHECKED BY Rita	DATE 2016/06/30
CUSTOMER ALTW	APPROVED BY Lisa	DATE 2016/06/30