



THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF AMPHENOL LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY AMPHENOL LTW.


REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	LEN1390111~14	2013/09/06	Rensong	Change dimension
C	LEN1480522~525	2014/08/18	Sam	Change Logo

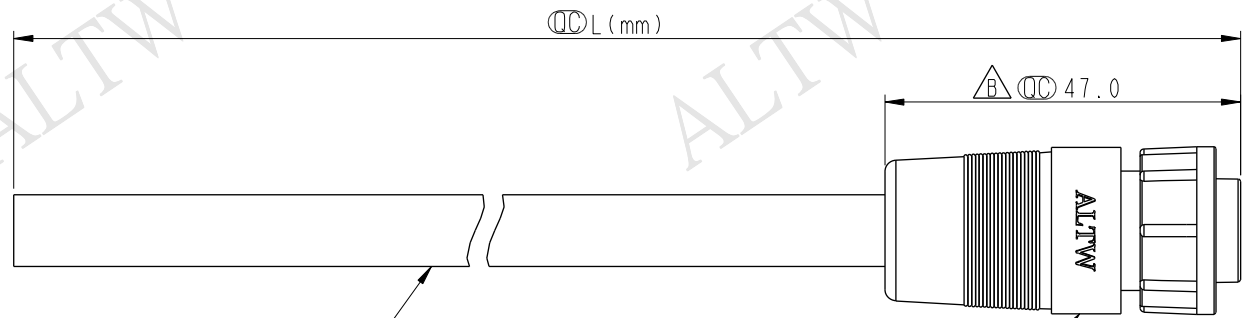

Cable ②

PWC-03BFMM-LL7100  
Color: Black

①




PWC-03BFMM-LL7DXX

- XX : 01~99Meters
- 01 : 01Meter
- 02 : 02Meters
- ...
- 99 : 99Meters

Cable Length(L):01~99Meters

- Note:
- \* Ⓞ Important Dimension To Check.
  - \* Waterproof Rate: IP67
  - \* Connector: Nylon+GF, Black.
  - \* Male Pin: Copper Alloy, Gold Plated.
  - \* Lock Nut: Nylon+GF, Black.
  - \* Cable: UL SJTW 14AWG\*3C·PVC Jacket  
UV Resistant, OD=9.5, Black.
  - \* Cable Length Tolerance:
    - 01M:40mm
    - 02M~05M:±60mm
    - 06M~10M:±100mm
    - 11M~30M:±200mm
    - 31M~99M:±500mm

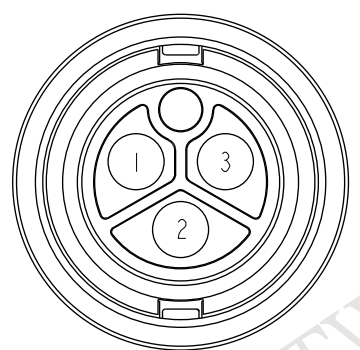

Pin Assignments  
Front View

3	White	白
2	Green	綠
1	Black	黑
Conn.	Wire Color	
Pin Out		

UNIT:mm		
TOLERANCE ±0.5mm		

TITLE POWER MOLDING F CONN. M PIN 20A			
SCALE 1:1	SIZE A4	SHEET 1	OF 1
REV. C	WC-REV. B.3	Ⓞ: Inspection item	

**Amphenol LTW**  
安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY Sam	DATE 2014-08-18
DWG NO PWC-03BFMM-LL7DXX	CHECKED BY Vicky	DATE 2014-08-18
CUSTOMER ALTW	APPROVED BY Rita	DATE 2014-08-18