



REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	LEN-940106~9	2009/03/11	Li Xiu Zhi	Change SR & Dimension
C	LEN1730103~107	2017/03/09	Ruru	Change Logo

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

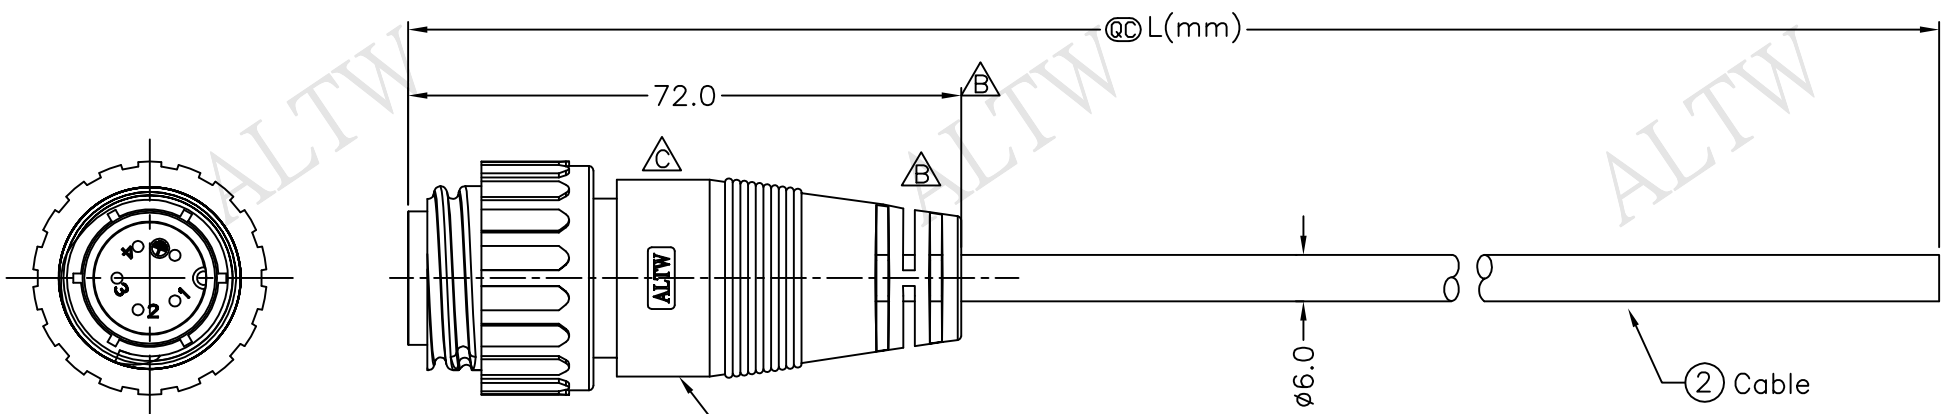


Conn.

① PWE-05AMMM-SL7000
Color:Black



PWE-05AMMM-SL7AXX
 XX:01~99Meter
 01:01Meter
 02:02Meters
 ...
 99:99Meters
 Cable Length(L):01~99Meters

- Note:
- * @C Important Dimensions To Check.
 - * Waterproof Rate: IP67
 - * Housing: Nylon+GF, Black
 - * Pin: Copper Alloy, Gold Plated
 - * Nut: Nylon+GF, Black
 - * Cable: UL2464 20AWG*5C+D+AL
PVC Jacket UV Resistant, OD=6.0mm, Black
 - * Cable Length Tolerance:01M:40mm
02M~05M:60mm
06M~10M:100mm
11M~30M:200mm
31M~99M:500mm



Pin Assignments
Front View前視圖

5	Green	綠
4	White	白
3	Black	黑
2	Blue	藍
1	Brown	棕
Conn.	Wire Color	Pin Out



UNIT:mm	
TOLERANCE	$\Delta \pm 0.5mm$

TITLE Power,Cable Screw 5Pin M Conn. M Pin	
SCALE Free	SHEET 1 OF 1
REV. C	SIZE A4
@C :Inspection Item	

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY Ruru	DATE 2017/03/10
DWG NO PWE-05AMMM-SL7AXX	CHECKED BY Rita	DATE 2017/03/10
CUSTOMER ALTW	APPROVED BY Max	DATE 2017/03/10