



REV.	ECN NO.	DATE	SIGN	DESCRIPTION
A	Initial Release	2010/03/24	Dominic	
B	LEN1180130	2011/08/27	baowei	Add Wire Size




Sealing Nut




Clamp Ring




Cable Seal 1




Cable Seal 2




Body




Screw Nut



Female Housing Ass'y




*Pin Screws





Note:

- * @@Important Dimensions To Check.
- * Waterproof Rate: IP67
- * Female Housing: Nylon+GF, Black
- * Female Pin: Copper Alloy, Gold Plated
- * Pin Screws: 1.5mm(HEX), Stainless Steel
For wire assembly, tightened by tool.
- * O-ring: Silicone, Gray
- * Seal 1:For Cable OD: $\phi 6.0\text{mm} \sim 9.0\text{mm}$
- * Seal 2:For Cable OD: $\phi 9.0\text{mm} \sim 12.5\text{mm}$
- * Flame Class: UL94V-0
- ⑧ * One Set Unassembled in one PE Bag
- * 1.5mm Hex Tool for Screws sold separately
- △ * Wire Size Range: 14AWG~18AWG



Pin Assignments
Front View

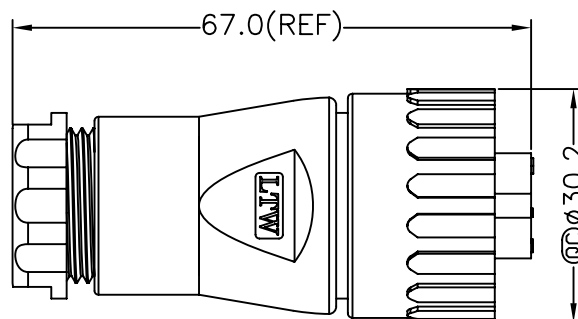

Conn.

UNIT:mm	
TOLERANCE	$\pm 0.5\text{mm}$

TITLE Assy Female Power Conn. 16Amp Screw in Type Pin (Gold Plated)			
SCALE	Free	SHEET	1 OF 1
REV.	B	SIZE	A4
QC :Inspection Item			

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO	LTWPWG-04BFFB-SL7001
DWG NO	LTWPWG-04BFFB-SL7001
CUSTOMER	

DRAWN BY	baowei
CHECKED BY	Micky
APPROVED BY	Victor

DATE	2011/08/27
DATE	2011/08/27
DATE	2011/08/27