





REV.	ECN NO.	DATE	SIGN	DESCRIPTION
A	Initial Release	2010/03/24	Dominic	
B	LEN1130365	2011/03/11	Kevin Wang	Modify the Dimension
C	LEN1180144	2011/08/27	baowei	Add Wire Size

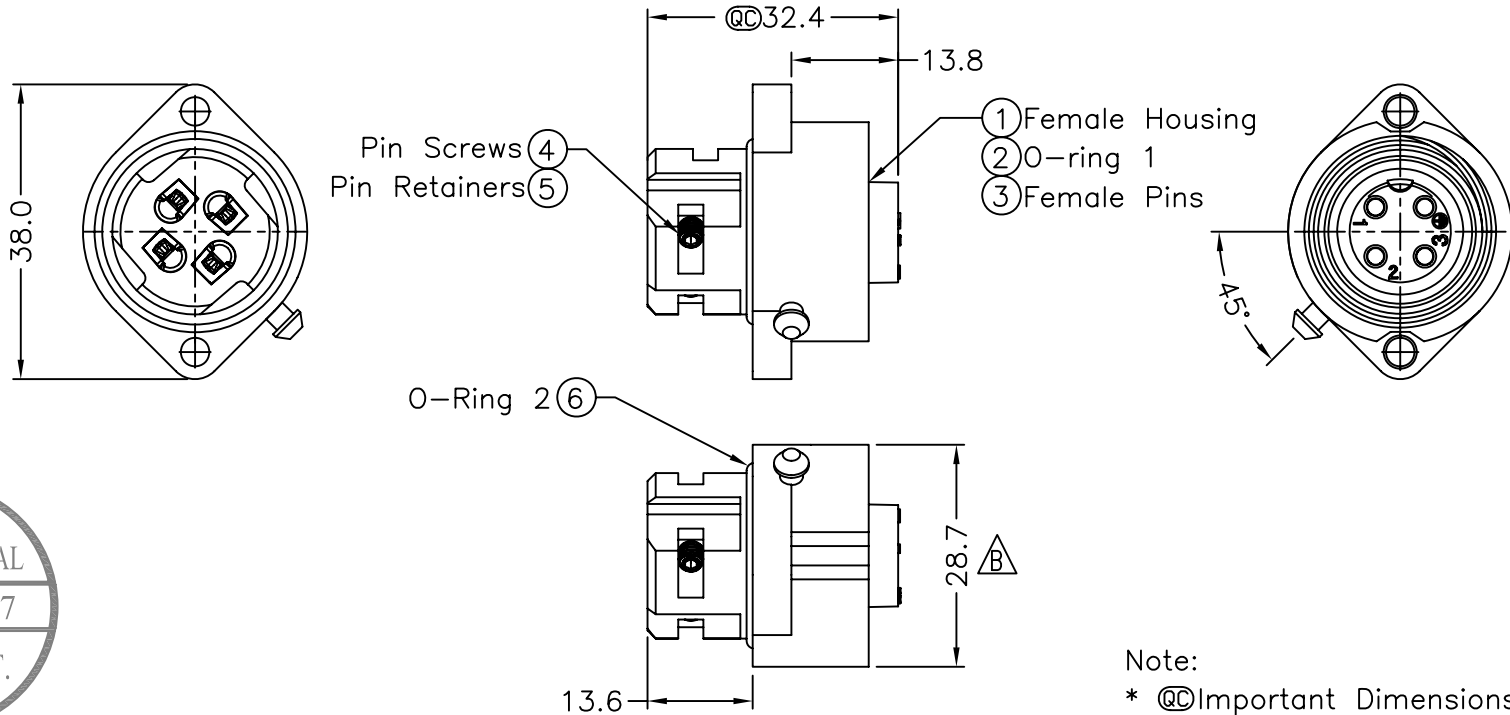

- Note:
- \* @C Important Dimensions.
  - \* Waterproof Rate: IP67
  - \* Female Housing: Nylon+GF, Black
  - \* Female Pin: Copper Alloy, Tin Plated
  - \* Pin Screws: 1.5mm(HEX), Stainless Steel For wire assembly, tightened by tool.
  - \* Cond. Retainer: Copper Alloy, Tin Plated
  - \* O-ring: Silicone, Gray
  - \* Flame Class: UL94V-0
  - ⑦ \* One Set Assembled in one PE Bag
  - \* 1.5mm Hex Tool for Screws sold separately
  - △ \* Wire Size Range: 14AWG~18AWG



Pin Assignments Front View

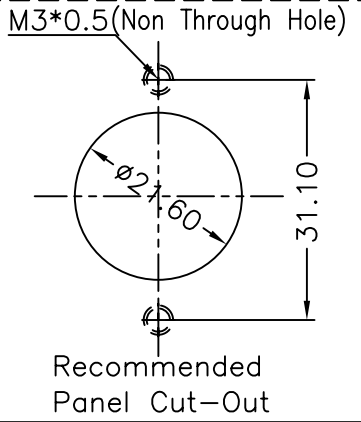

Recommended Panel Cut-Out

UNIT:mm		TITLE Panel Female Power Conn.16Amp Screw in Type Pin (Tin Plated)	<b>Amphenol LTW</b> 安費諾亮泰企業股份有限公司		ITEM NO LTWPWG-04PFFB-SC7003	DRAWN BY baowei	DATE 2011/08/27
TOLERANCE .X ±0.25 .XX ±0.1 .XXX ±0.05 ANGLES ±1'	SCALE Free	SHEET 1 OF 1	SHEET 1 OF 1		DWG NO LTWPWG-04PFFB-SC7003	CHECKED BY Micky	DATE 2011/08/27
REV. C	SIZE A4	④ :Inspection Item		CUSTOMER	APPROVED BY Victor	DATE 2011/08/27	

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.