
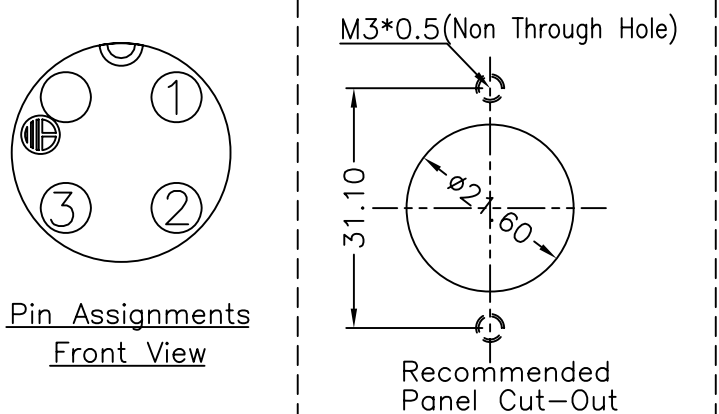



REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	LEN-050324	2010/05/18	Kevin Wang	Modify The Dimensions
C	LEN1130366	2011/03/11	Kevin Wang	Modify The Dimensions
D	LEN1180145	2011/08/27	baowei	Add Wire Size

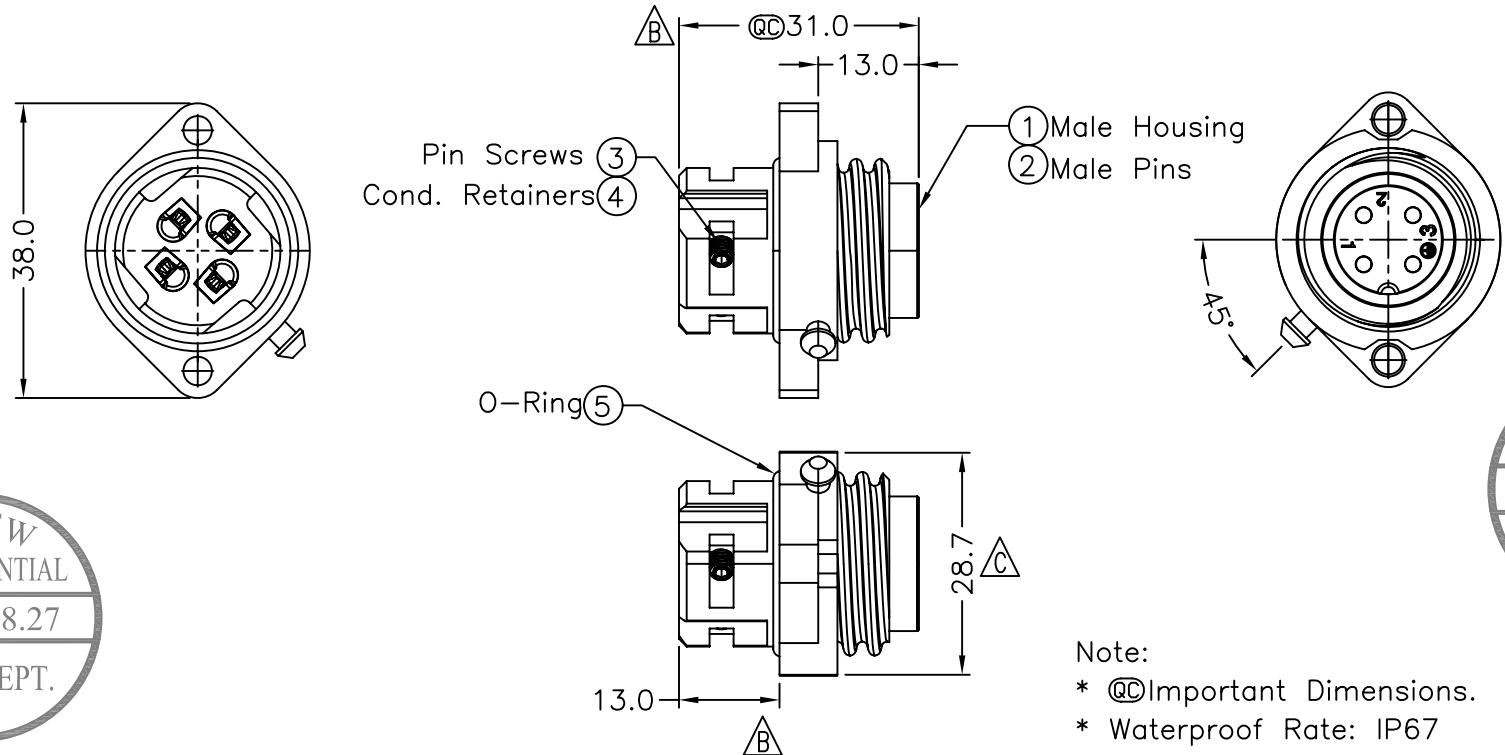

- Note:
- * @C Important Dimensions.
 - * Waterproof Rate: IP67
 - * Male Housing: Nylon+GF, Black
 - * Male Pin: Copper Alloy, Gold Plated
 - * Pin Screws: 1.5mm(HEX), Stainless Steel, For wire assembly, tightened by tool.
 - * Cond. Retainer: Copper Alloy, Gold Plated
 - * O-ring: Silicone, Gray
 - * Flame Class: UL94V-0
 - ⑥ * One Set Assembled in one PE Bag
 - * 1.5mm Hex Tool for Screws sold separately
 - △ * Wire Size Range: 14AWG~18AWG

UNIT:mm	
TOLERANCE	
.X	±0.25
.XX	±0.1
.XXX	±0.05
ANGLES	±1°

TITLE Panel Male Power Conn. 16Amp Screw in Type Pin (Gold Plated)	
SCALE Free	SHEET 1 OF 1
REV. D	SIZE A4
④ :Inspection Item	

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO LTWPWG-04PMMB-SC7001	DRAWN BY baowei	DATE 2011/08/27
DWG NO LTWPWG-04PMMB-SC7001	CHECKED BY Micky	DATE 2011/08/27
CUSTOMER	APPROVED BY Victor	DATE 2011/08/27

DATE 2011/08/27
DATE 2011/08/27
DATE 2011/08/27

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.