


THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

REV.	ECN NO.	DATE	SIGN	DESCRIPTION
A	Initial Released	2020/08/21	Ruru	Old Item No. NUB-20AFM-SA7AXX
B	C240311	2024/03/28	Ruru	$\triangle B$ X2

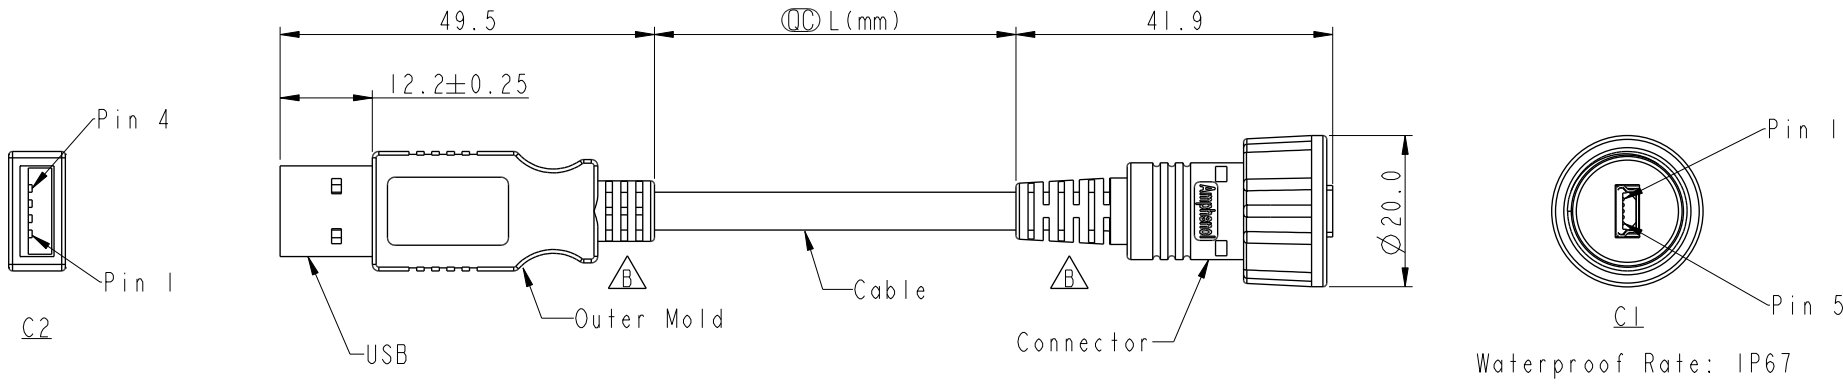

NUB20FL-NAML-SAXXX

XXX: 01~05Meter
 001: 01Meter
 002: 02Meter
 ...
 005: 05Meter
 Cable Length(L): 01~05Meters

Note:
 * ⌀ Important Dimension.
 * Housing: Thermoplastic, Black
 * C1: Mini USB B Type 5 Pin Plug
 * C2: USB A Male Solder Type, Gold Plated.
 * Cable: USB 2.0 28#*1P+24#*2c+Al.My+D+B, PVC Jacket, UV Resistant, Black, OD=5mm.
 * Do Not Include On The Connector"
 * Cable Length Tolerance: 01M: +60/-0mm
 02M, 03M: +120/-0mm
 04M, 05M: +160/-0mm

Shield	Drain	地線	Shield
4	Black 24AWG	黑	5
3	Green 28AWG	綠	3
2	White 28AWG	白	2
1	Red 24AWG	紅	1
C2	Wire Color		C1

Pin Out

Twist

UNIT:mm		TITLE
TOLERANCE	$\pm 0.5\text{mm}$	ACC, USB, MINI B, DB-ENDED, FM
SCALE	1:2	SIZE A4
REV.	B	WC-REV. A.3
		⌀ : Inspection item

Amphenol LTW
 安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY	DATE
DWG NO	CHECKED BY	DATE
CUSTOMER	APPROVED BY	DATE
ALTW	Ruru	2024-03-28
	Rita	2024-03-28
	Fred	2024-03-28