


REV.	ECN NO.	DATE	SIGN.	DESCRIPTION
B	C210802	2021/05/19	Ruru	B X1
C	C211509	2021/09/22	Ruru	A X1
D	C220720	2022/05/16	Vicky	D X1

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

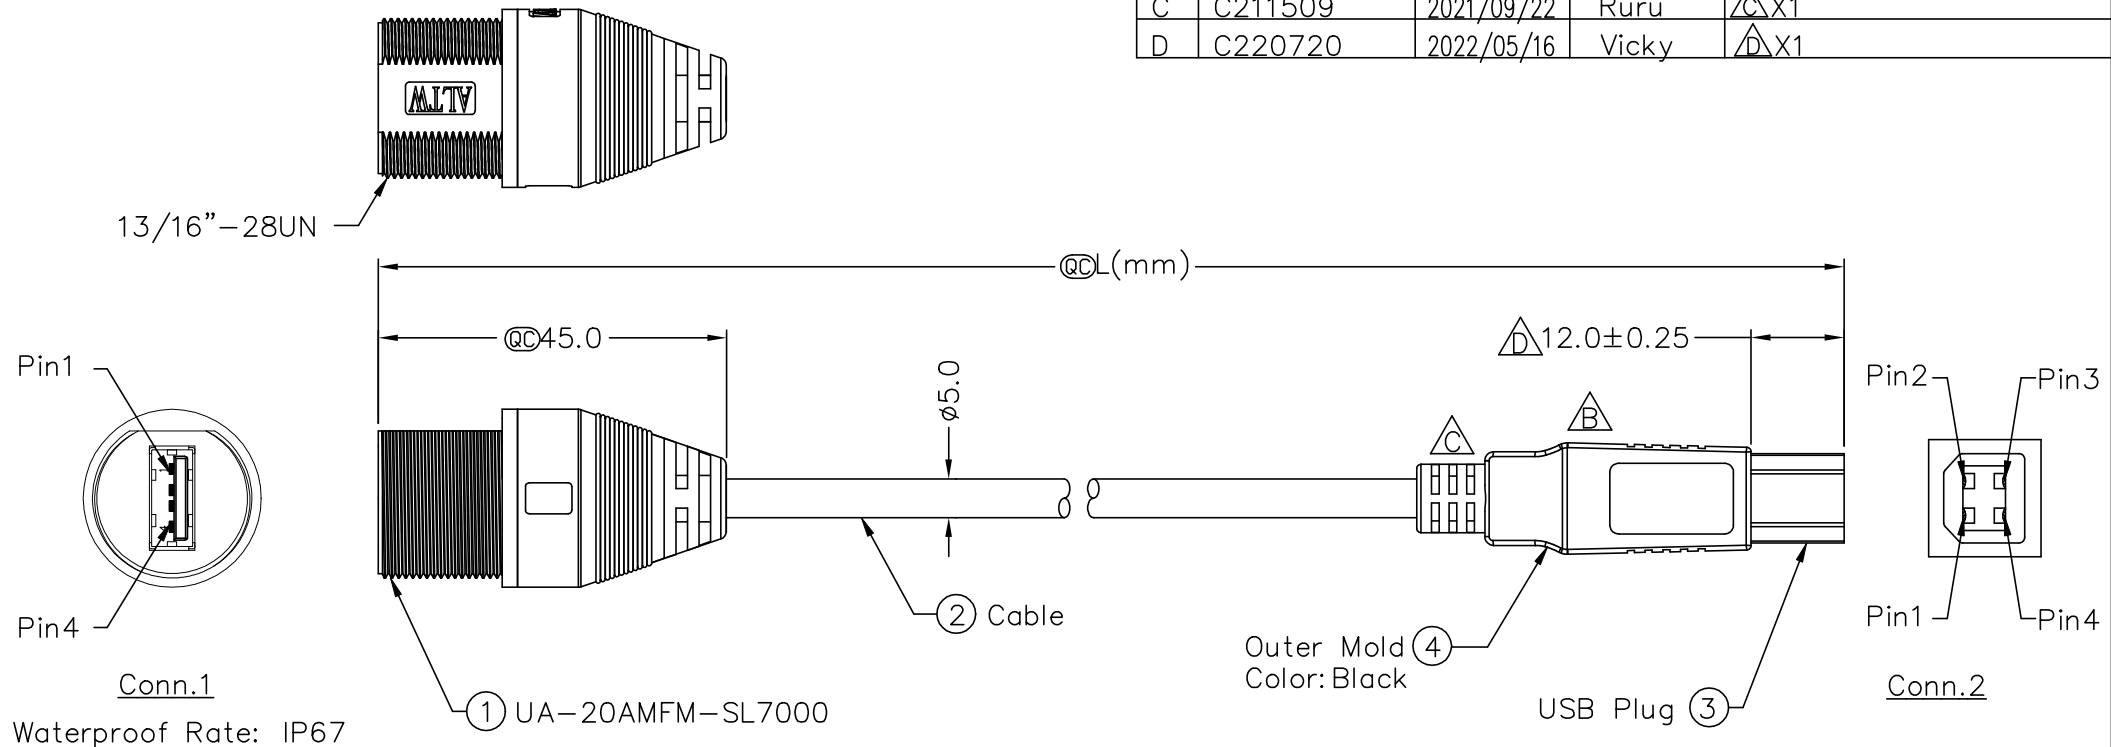

Conn.1
Waterproof Rate: IP67

UA20ML-NBML-SAXXX

XXX: 01~05Meters
 001: 01Meter
 002: 02Meters
 :
 :
 005: 05Meters
 Cable Length(L): 01~05Meters

- Note:
- * @C Important Dimension.
 - * Housing: Thermoplastic, Black.
 - * USB A: Female Solder Type, Gold Plated.
 - * USB B: Male Solder Type, Gold Plated.
 - * Cable: USB2.0 28#*1P+24#*2C+Al.My+D+B, PVC Jacket, UV Resistant, Black, OD=5.0mm.
 - * Do Not Include On The Connector"
 - * Cable Length Tolerance: 01M: ±40mm
02M~05M: ±60mm

Shield	Drain	地線	Shield
4	Black (24AWG)	黑	4
3	Green (28AWG)	綠	3
2	White (28AWG)	白	2
1	Red (24AWG)	紅	1
Conn.1	Wire Color		Conn.2
Pin Out			

Twist

UNIT: mm		TITLE
TOLERANCE		ACC, USB, A TYPE, DB-ENDED, MM
±0.5 mm		SCALE Free SHEET 1 OF 1
REV. D	SIZE A4	@C : Inspection Item

Amphenol LTW
 安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY	DATE
	Ruru	2020/08/21
DWG NO	CHECKED BY	DATE
UA20ML-NBML-SAXXX	Rita	2020/08/21
CUSTOMER	APPROVED BY	DATE
ALTW	Max	2020/08/21