
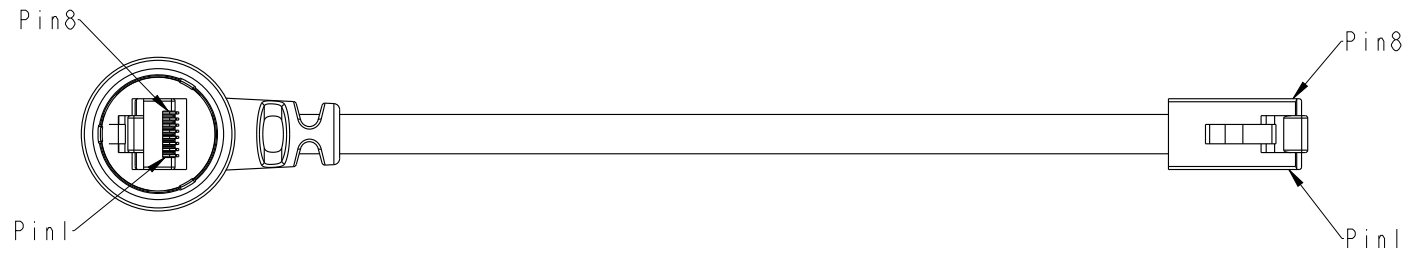
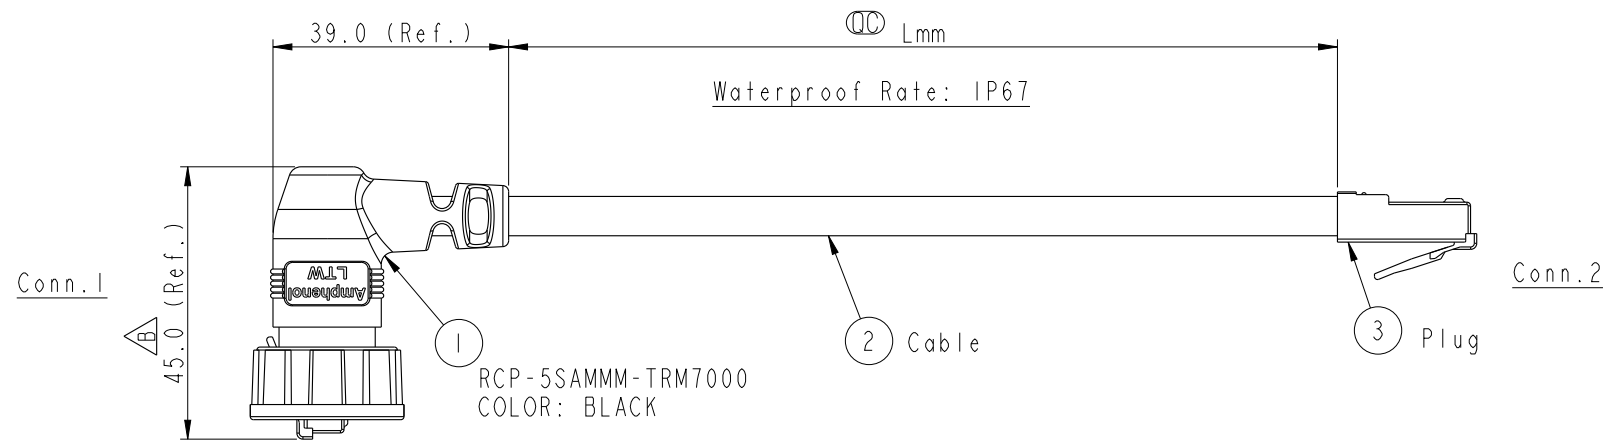


THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	C191395	2019/07/29	JC Chen	Dimensional tolerance change



RCP5SM-SPG06M-TR7B XX
 XX : 01~99Meters
 01 : 01Meter
 02 : 02Meters
 ...
 99 : 99Meters
 Cable Length(L): 01~99Meters

- Note:
- * (QC) Important Dimension to Check
 - * Waterproof Rate: IP67 (Mating)
 - * Housing: Nylon+GF, Black
 - * Lock Nut: Nylon+GF, Black
 - * RJ Plug: Shield, Phosphor Bronze, Gold Plated
 - * Cable: CAT5E FTP 24#*4P+D+AL/MY, 6.5
 - * Cable Length Tolerance: 01M:±40mm
 02M~05M:±60mm
 11M~30M:±200mm
 31M~99M:±500mm

Shield	Drain Wire	接地線	Shield
8	Brown	棕	8
7	White/Brown	白/棕	7
6	Green	綠	6
5	White/Blue	白/藍	5
4	Blue	藍	4
3	White/Green	白/綠	3
2	Orange	橘	2
1	White/Orange	白/橘	1
Conn.1	Wire Color		Conn.2

Pin Out

UNIT:mm			TITLE RJ DOUBLE-90 ENDED, WITH CONN 3KEY LOCK
TOLERANCE .X ±0.25 .XX ±0.1 .XXX ±0.05 ANGLES ±1°	SCALE 4:5	SIZE A4	SHEET 1 OF 1
REV. B	WC-REV. A.2	(QC): Inspection item	

Amphenol LTW
 安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY JC Chen	DATE 2019-07-29
DWG NO RCP5SM-SPG06M-TR7BXX	CHECKED BY Li Feng	DATE 2019-07-29
CUSTOMER ALTW	APPROVED BY Jerry	DATE 2019-07-29