


THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	LEN1440195	2014/05/10	Tom	Updated The Note
C	LEN1490327	2014-09-01	Tom	Change 94V0 Material
D	C241104	2024/09/26	Ruru	\triangle D X6

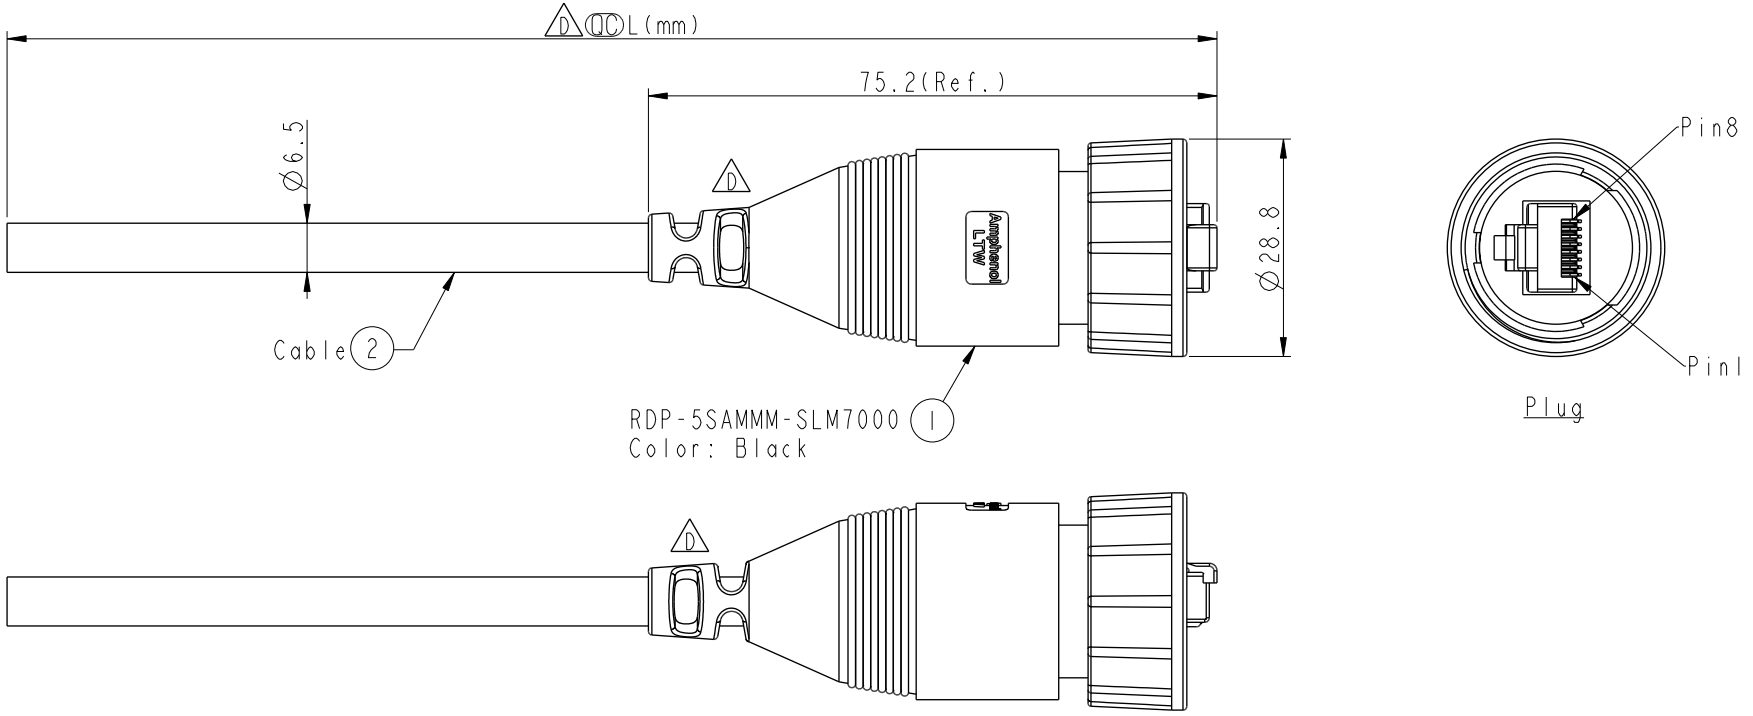

RDP-5SAMMM-SLM7BXX

XX: 01~99Meter
 01: 01Meter
 02: 02Meters
 :
 :
 99: 99Meters
 Cable Length(L):01~99Meters

X:
 (B)CAT5E FTP

Note:

- * \triangle Important Dimention To Check.
- * Waterproof Rate: IP67
- * Plug: PC, Gold Plated
- * Screw Nut: Thermoplastic, Black
- * Gasket: Rubber, Gray
- * Cable: CAT5E FTP, OD : \varnothing 6.5 Black
- * Cable Length Tolerance: 01M: \pm 40mm
 02~05M: \pm 60mm
 06~10M: \pm 100mm
 11~30M: \pm 200mm
 30~99M: \pm 500mm

Drain Wire	接地	Shield	
Brown	棕	8	Twist 對絞
White/Brown	白/棕	7	
Green	綠	6	Twist 對絞
White/Blue	白/藍	5	
Blue	藍	4	Twist 對絞
White/Green	白/綠	3	
Orange	橘	2	Twist 對絞
White/Orange	白/橘	1	
Wire Color		Plug	

Pin Out

UNIT:mm		TITLE	RJ, D PLASTIC, C5E SHLD CABLE W/SR, M, MOLDING, SCREW \triangle D		
TOLERANCE	\pm 0.5	SCALE	1:1	SIZE	A4
		REV.	D	WC-REV.	A.16
				\triangle CC: Inspection item	

Amphenol LTW
 安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY	DATE
	Ruru	2024-09-26
DWG NO	CHECKED BY	DATE
RDP-5SAMMM-SLM7BXX	Rita	2024-09-26
CUSTOMER	APPROVED BY	DATE
ALTW	Fred	2024-09-26