
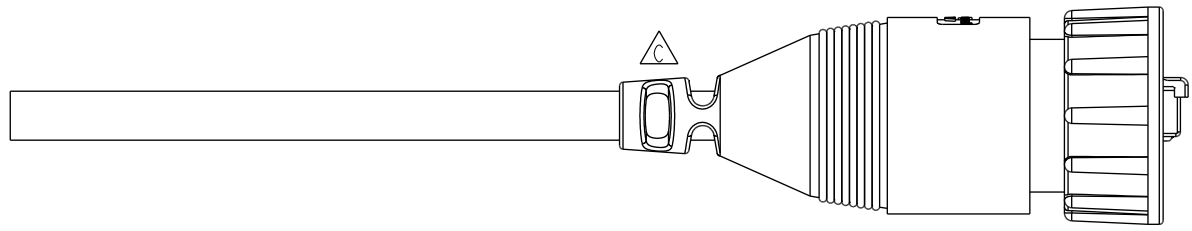
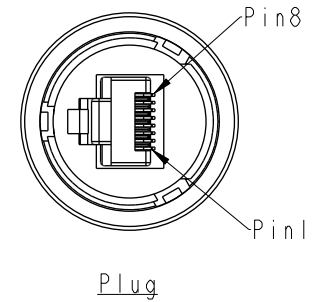


THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	LEN1490329	2014-09-06	Joyy	Change to 94V0 material
C	C241104	2024/09/26	Ruru	$\triangle C$ X6

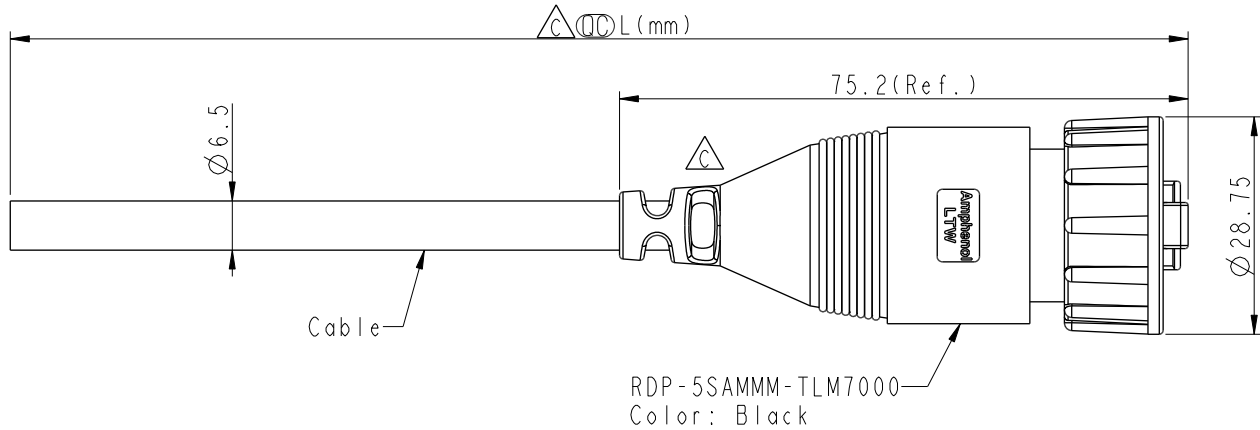

RDP-5SAMMM-TLM7BXX

XX: 01~99Meter
 01: 01Meter
 02: 02Meters
 ...
 99: 99Meters
 Cable Length(L):01~99Meters

X:
 (B)CAT5E FTP

- Note:
- * CC Important Dimension To Check.
 - * Waterproof Rate: IP67
 - * Plug: PC, Gold Plated
 - * Lock Nut: Thermoplastic, Black
 - * Gasket: Rubber, Gray
 - * Cable: CAT5E FTP, OD: ϕ 6.5mm, Black
 - * Cable Length Tolerance:
 - 01M: \pm 40mm
 - 02~05M: \pm 60mm
 - 06~10M: \pm 100mm
 - 11~30M: \pm 200mm
 - 30~99M: \pm 500mm

Drain Wire	接地	Shield	
Brown	棕	8	Twist 對絞
White/Brown	白/棕	7	
Green	綠	6	Twist 對絞
White/Blue	白/藍	5	
Blue	藍	4	Twist 對絞
White/Green	白/綠	3	
Orange	橘	2	Twist 對絞
White/Orange	白/橘	1	
Wire Color		Plug	
Pin Out			

UNIT:mm		TITLE RJ, D PLASTIC, C5E SHLD CABLE W/SR, M, MOLDING, 3LOCK $\triangle C$	
TOLERANCE	± 0.5	SCALE 1:2	SIZE A4
REV. C	WC-REV. A.16	SHEET 1	OF 1
CC : Inspection item			

Amphenol LTW
 安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY Ruru	DATE 2024-09-30
DWG NO RDP-5SAMMM-TLM7BXX	CHECKED BY Rita	DATE 2024-09-30
CUSTOMER ALTW	APPROVED BY Fred	DATE 2024-09-30