


THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B		2019-03-21	Huaiyu Fu	Change Lock Nut To Screw Nut
C	C241104	2024/09/26	Ruru	$\triangle C$ X6

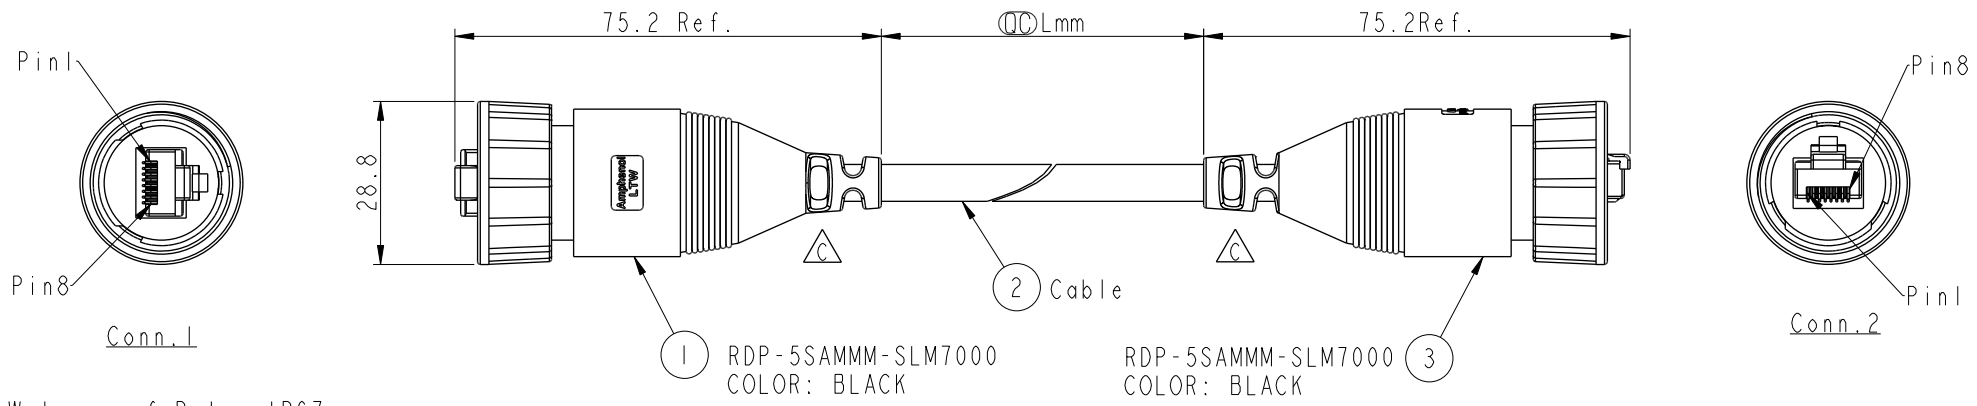

RDP5SM-RDP5SM-SL7B XX  
 XX : 01~99Meters  
 01 : 01Meter  
 02 : 02Meters  
 :  
 :  
 :  
 99 : 99Meters  
 Cable Length(L): 01~99Meters

- Note:
- \*  $\text{\textcircled{C}}$  Important Dimension To Check
  - \* Waterproof Rate: IP67
  - \* Housing: Thermoplastic, Black
  - \* Screw Nut: Thermoplastic, Black
  - \* RJ Plug: Shield, Phosphor Bronze, Gold Plated
  - \* Cable: CAT5E FTP 24#\*4P+D+AL/MY, 6.5
  - \* Cable Length Tolerance: 01M:  $\pm 40\text{mm}$   
 02M~05M:  $\pm 60\text{mm}$   
 11M~30M:  $\pm 200\text{mm}$   
 31M~99M:  $\pm 500\text{mm}$

Shield	Drain Wire	Shield
8	Brown 棕	8
7	White/Brown 白/棕	7
6	Green 綠	6
5	White/Blue 白/藍	5
4	Blue 藍	4
3	White/Green 白/綠	3
2	Orange 橘	2
1	White/Orange 白/橘	1
Conn.1	Wire Color	Conn.2

Pin Out

UNIT:mm		TITLE
TOLERANCE	$\pm 0.5\text{mm}$ $\triangle C$	RJ, D PLASTIC, C5E SHLD, M D PLASTIC, C5E SHLD, M $\triangle C$
SCALE	1:1	SIZE A4
REV.	C	WC-REV. .0
		$\text{\textcircled{C}}$ : Inspection item

**Amphenol LTW**  
 安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY	DATE
	Ruru	2024-09-26
DWG NO	CHECKED BY	DATE
RDP5SM-RDP5SM-SL7BXX	Rita	2024-09-26
CUSTOMER	APPROVED BY	DATE
ALTW	Fred	2024-09-26