



THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B		2019-03-21	Huaiyu Fu	Change Lock Nut To Screw Nut

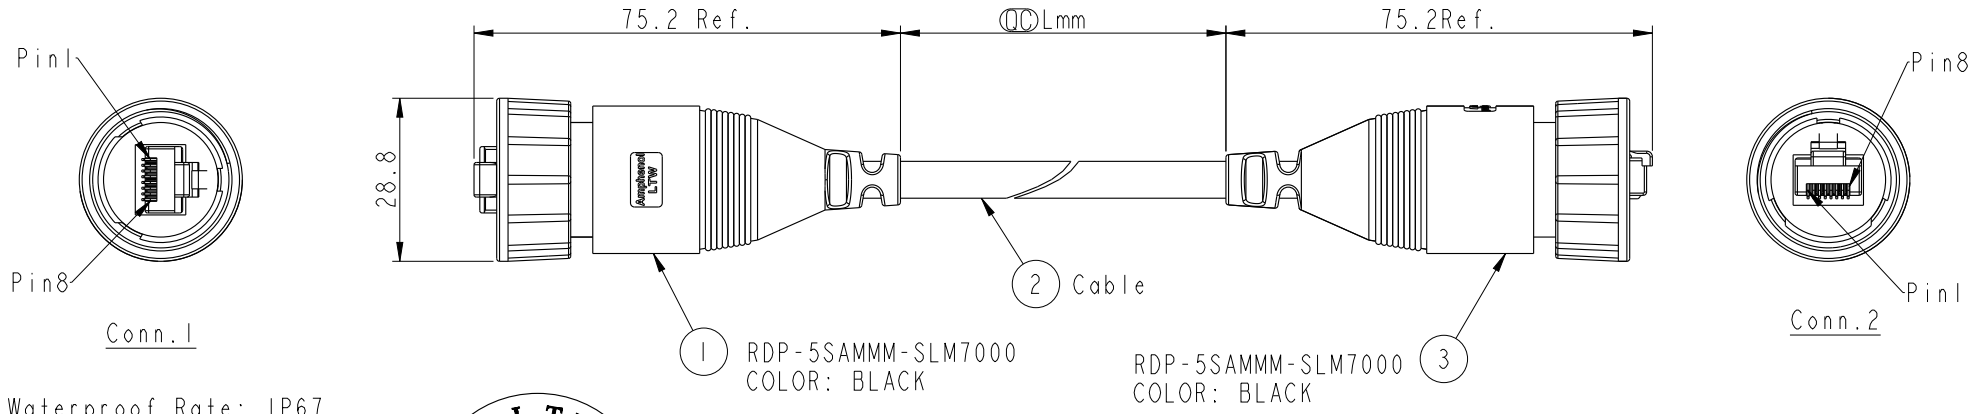

Waterproof Rate: IP67



RDP5SM-RDP5SM-SL7B XX  
 XX : 01~99Meters  
 01 : 01Meter  
 02 : 02Meters  
 ...  
 99 : 99Meters  
 Cable Length(L): 01~99Meters

- Note:
- \*  $\varnothing$  Important Dimension To Check
  - \* Waterproof Rate: IP67
  - \* Housing: Nylon+GF, Black
  - \* Screw Nut: Nylon+GF, Black
  - \* RJ Plug: Shield, Phosphor Bronze, Gold Plated
  - \* Cable: CAT5E FTP 24#\*4P+D+AL/MY, 6.5
  - \* Cable Length Tolerance: 01M: ±40mm  
 02M~05M: ±60mm  
 11M~30M: ±200mm  
 31M~99M: ±500mm

Shield	Drain Wire	Shield
8	Brown 棕	8
7	White/Brown 白/棕	7
6	Green 綠	6
5	White/Blue 白/藍	5
4	Blue 藍	4
3	White/Green 白/綠	3
2	Orange 橘	2
1	White/Orange 白/橘	1
Conn.1	Wire Color	Conn.2

Pin Out

UNIT: mm		TITLE		ITEM NO		DRAWN BY		DATE	
		RJ DOUBLE-ENDED, WITH CONN		RDP5SM-RDP5SM-SL7BXX		Huaiyu Fu		2019-03-21	
TOLERANCE		SCALE	SIZE	SHEET	OF	CHECKED BY	DATE		
.X ±0.25 .XX ±0.1 .XXX ±0.05 ANGLES ±1°		1:1	A4	1	1	Lifeng	2019-03-21		
REV. B		WC-REV. .0	$\varnothing$ : Inspection item		CUSTOMER		APPROVED BY		DATE
					ALTW		Jerry		2019-03-21

**Amphenol LTW**  
 安費諾亮泰企業股份有限公司