
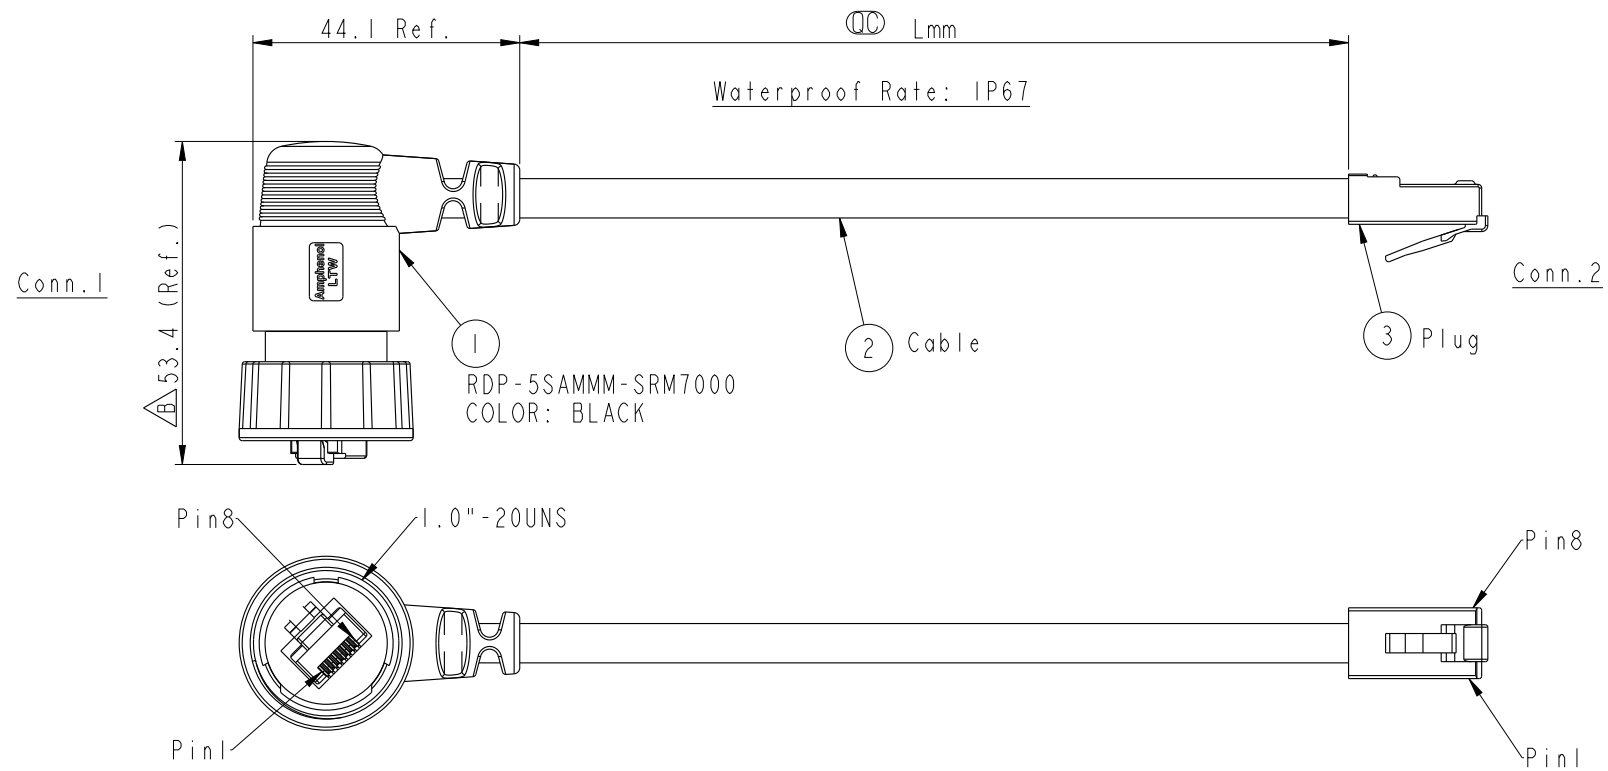


THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	C191686	2019/07/18	JC Chen	Dimensional tolerance change



RDP5SM-SPG06M-SR7B XX
 ↓
 XX : 01~99Meters
 01 : 01Meter
 02 : 02Meters
 ...
 99 : 99Meters
 Cable Length(L): 01~99Meters

Note:
 * (QC) Important Dimension To Check
 * Waterproof Rate: IP67 (Mating)
 * Housing: Nylon+GF, Black
 * Lock Nut: Nylon+GF, Black
 * RJ Plug: Shield, Phosphor Bronze, Gold Plated
 * Cable: CAT5E FTP 24#*4P+D+AL/MY, 6.5
 * Cable Length Tolerance: 01M:±40mm
 02M~05M:±60mm
 11M~30M:±200mm
 31M~99M:±500mm

Shield	Drain Wire	接地線	Shield	
8	Brown	棕	8	Twist
7	White/Brown	白/棕	7	
6	Green	綠	6	Twist Twist
5	White/Blue	白/藍	5	
4	Blue	藍	4	Twist
3	White/Green	白/綠	3	
2	Orange	橘	2	Twist
1	White/Orange	白/橘	1	
Conn.1	Wire Color		Conn.2	

UNIT:mm			TITLE RJ DOUBLE-90 ENDED, WITH CONN 1.0"-20UNS
TOLERANCE .X ±0.25 .XX ±0.1 .XXX ±0.05 ANGLES ±1°	SCALE 4:5	SIZE A4	SHEET 1 OF 1
	REV. B	WC-REV. A.1	(QC): Inspection item

Amphenol LTW
 安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY JC Chen	DATE 2019-09-25
DWG NO RDP5SM-SPG06M-SR7BXX	CHECKED BY Li Feng	DATE 2019-09-25
CUSTOMER ALTW	APPROVED BY Jerry	DATE 2019-09-25