


THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	C241104	2024/09/30	Ruru	X5

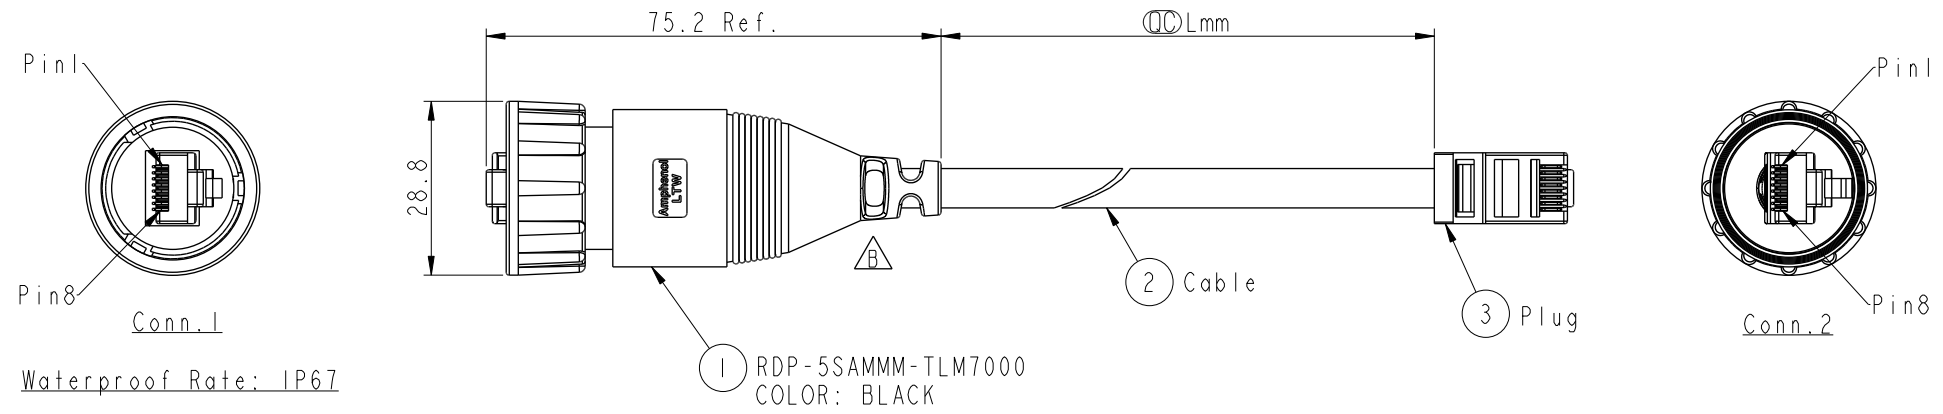

Waterproof Rate: IP67

RDP5SM-SPG06M-TL7B XX
 XX : 01~99Meters
 01 : 01Meter
 02 : 02Meters
 ...
 99 : 99Meters
 Cable Length(L): 01~99Meters

- Note:
- * (L) Important Dimension To Check
 - * Waterproof Rate: IP67
 - * Housing: Thermoplastic, Black
 - * Lock Nut: Thermoplastic, Black
 - * RJ Plug: Shield, Phosphor Bronze, Gold Plated
 - * Cable: CAT5E FTP 24#*4P+D+AL/MY, 6.5
 - * Cable Length Tolerance:
 - 02M~05M: ±60mm
 - 11M~30M: ±200mm
 - 31M~99M: ±500mm

Shield	Drain Wire	Shield	
8	Brown 棕	8	Twist
7	White/Brown 白/棕	7	
6	Green 綠	6	Twist
5	White/Blue 白/藍	5	
4	Blue 藍	4	Twist
3	White/Green 白/綠	3	Twist
2	Orange 橘	2	
1	White/Orange 白/橘	1	Twist
Conn.1	Wire Color	Conn.2	

Pin Out

UNIT:mm TOLERANCE ±0.5 mm B	TITLE RJ, D PLASTIC, C5E SHLD, M SH PLUG, PLUG, M B		Amphenol LTW 安費諾亮泰企業股份有限公司		ITEM NO RDP5SM-SPG06M-TL7BXX	DRAWN BY Ruru	DATE 2024-09-30
	SCALE 4:5	SIZE A4			SHEET 1 OF 1	CHECKED BY Rita	DATE 2024-09-30
	REV. B	WC-REV. A.1	(C) Inspection item	CUSTOMER ALTW	APPROVED BY Fred	DATE 2024-09-30	