
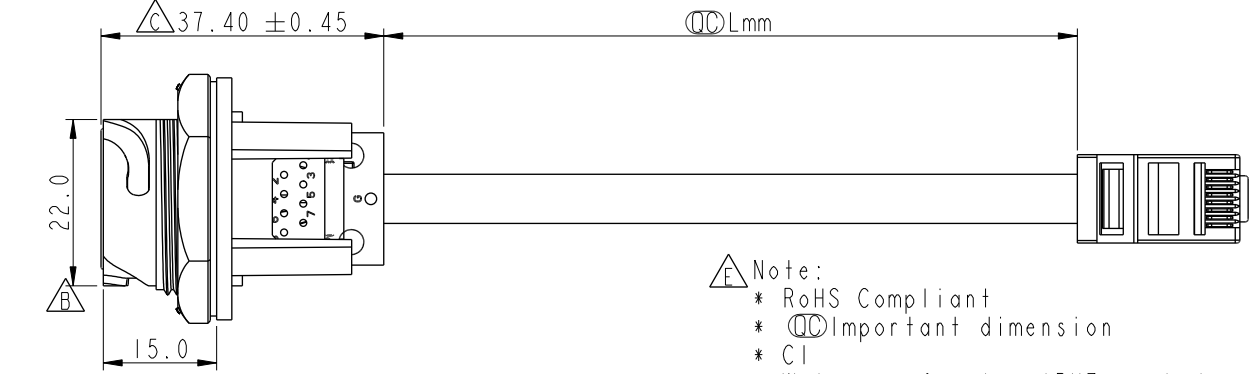
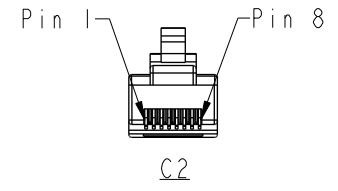
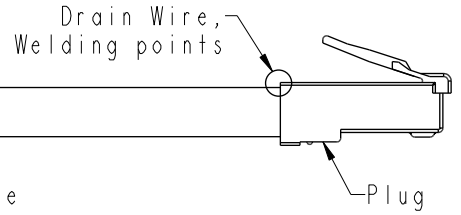
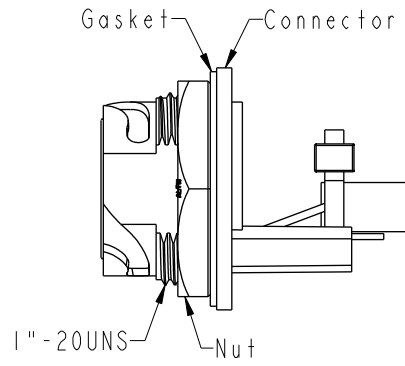


THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF AMPHENOL LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY AMPHENOL LTW.


REV.	ECN NO.	DATE	SIGN	DESCRIPTION
C	LEN1810089	2017/11/29	Jalam	Modify The Tolerance
D	E191612	2019/09/12	Ruru	Drawing Code Unified Writing
E	C220800	2022/05/30	Vicky	△EX2

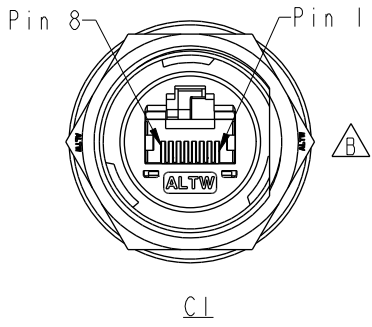

RDP-5SPFFP-TCM7BXX △D

- XX: 100~1000mm
- 10: 100mm
- 15: 150mm
- 20: 200mm
- 95: 950mm
- A0: 1000mm
- Cable Pitch Unit=50mm

- △E Note:
- * RoHS Compliant
 - * Ⓞ Important dimension
 - * C1
Waterproof rate: IPX7, mated
Housing: Thermoplastic, Black, RJ45 jack, Shielded
Nut: Thermoplastic, Black
Gasket: Rubber, Gray
 - * C2
Waterproof rate: Non-Waterproof
Plug: RJ45, Shielded
 - * Use with waterproof cap or dust cap
Panel thickness max: 1.3mm
 - * Use without waterproof cap or dust cap
Panel thickness max: 2.5mm
 - * Gasket and nut are assembled on connectors
 - * Cable: Cat.5E, 24#*4P+MY+D+AL, PVC Jacket, Black, OD6.5mm
 - * Cable length tolerance: 100mm: ±10mm
100mm < L ≤ 300mm: ±15mm
300mm < L ≤ 1000mm: ±20mm

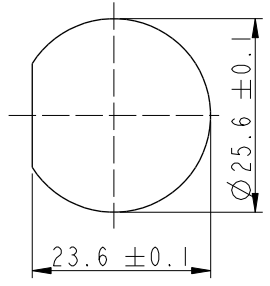


Shield	Drain Wire	接地線	Shield
8	Brown	棕	8
7	White/Brown	白/棕	7
6	Green	綠	6
5	White/Blue	白/藍	5
4	Blue	藍	4
3	White/Green	白/綠	3
2	Orange	橘	2
1	White/Orange	白/橘	1

Twist Twist Twist

C1	Wire Color	C2
	Pin Out	

Recommended Panel Cut-Out

UNIT: mm



TITLE RJ, D PLASTIC, C5E SHLD FRONT FASTENED, F, PNL W/CABLE, 3LOCK △E			
SCALE 1:1	SIZE A4	SHEET 1 OF 1	
REV. E	WC-REV. A.6	Ⓞ: Inspection item	

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY Ruru	DATE 2019-09-16
DWG NO RDP-5SPFFP-TCM7BXX	CHECKED BY Rita	DATE 2019-09-16
CUSTOMER ALTW	APPROVED BY Max	DATE 2019-09-16