


THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

REV.	ECN NO.	DATE	SIGN	DESCRIPTION
F	LEN1670033~038	2016-07-01	Feng_Li	Modify Pin Out
G	C191757	2019/09/27	JC Chen	$\triangle G$ X1
H	C241104	2024/09/30	Ruru	$\triangle H$ X3

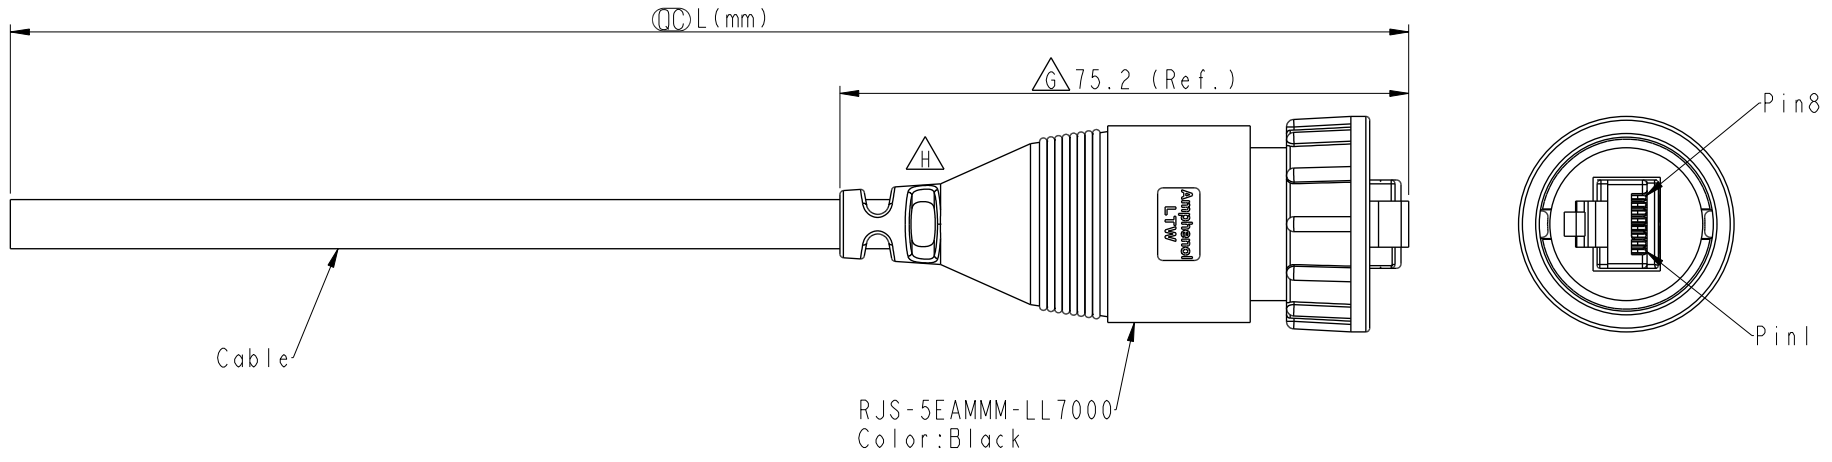

RJS-5EAMMM-LL7EXX

XX: 01~99Meters
01: 01Meter
02: 02Meters
 ...
99: 99Meters

Cable Length(L): 01~99Meters

- $\triangle H$ Note:
- * \odot Important Dimension
 - * Waterproof Rate: IP67
 - * Housing: Thermoplastic, Black
 - * Plug: PC, Gold Plated, Shielded.
 - * Lock Nut: Thermoplastic, Black
 - * Gasket: Rubber, Gray
 - * Seal: Rubber, Gray
 - * Sealing Nut: Thermoplastic, Black
 - * Cable: CAT5E FTP, OD Max: \varnothing 6.5mm, Black.
 - * Cable Length Tolerance:
 - 01M: \pm 40mm
 - 02~05M: \pm 60mm
 - 06~10M: \pm 100mm
 - 11~30M: \pm 200mm
 - 30~99M: \pm 500mm

Pin Out		
Wire Color		Plug
Drain Wire	地線	Shield
Brown	棕	8
Brown/white	棕/白	7
Green	綠	6
Blue/white	藍/白	5
Blue	藍	4
Green/white	綠/白	3
Orange	橙	2
Orange/white	橙/白	1

Twist 對絞

Twist 對絞

Twist 對絞

UNIT:mm		TITLE	RJ45 MOLDING 180° LOCK TYPE MATCH RJS-5EPFFP-LC7001 $\triangle H$
TOLERANCE	± 0.5	SCALE	1:1
		SIZE	A4
		SHEET	1 OF 1
		REV.	H
		WC-REV.	B.4
		\odot	Inspection item

Amphenol LTW
 安費諾亮泰企業股份有限公司

ITEM NO	RJS-5EAMMM-LL7EXX	DRAWN BY	Ruru	DATE	2024-09-30
DWG NO	RJS-5EAMMM-LL7EXX	CHECKED BY	Rita	DATE	2024-09-30
CUSTOMER	ALTW	APPROVED BY	Fred	DATE	2024-09-30