


REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	LEN1670234	2016/07/18	Feng_Li	Add Cable Length Tolerance
C	C201856	2020/11/25	Vicky	 *3



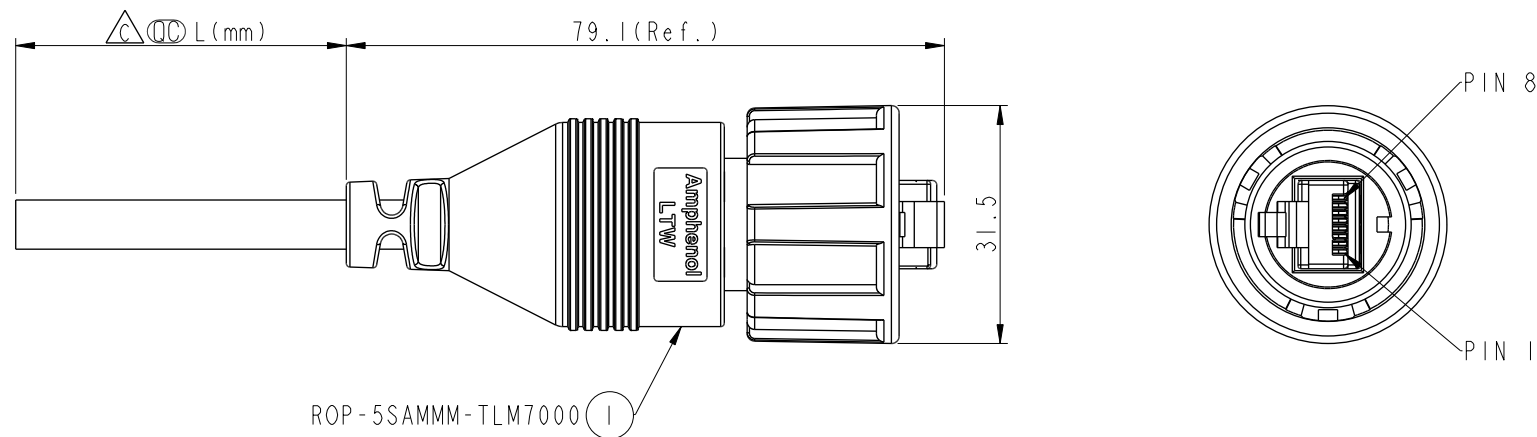

ROP-5SAMMM-TLM7BXX

XX: 01~99Meter
01: 01Meter
02: 02Meters
...

99: 99Meters

Cable Length(L):01~99Meters




 Note:

- *  Important Dimension
- * Waterproof Rate: IP67, Mated
- * Housing: Thermoplastic, Black
- * Plug: PC, Gold Plated, Shielded
- * Lock Nut: Thermoplastic, Black
- * Gasket: Rubber, Gray
- * Seal: Rubber, Gray
- * Sealing Nut: Thermoplastic, Black
- * Cable: FTP, 24#*4P+MY+D+AL/MY, OD6.5, Black
- * Cable Length Tolerance: 01M:±40mm
02M~05M:±60mm
06M~10M:±100mm
11M~30M:±200mm
31M~99M:±500mm

Drain Wire	接地	Shield
Brown	棕	8
White/Brown	白/棕	7
Green	綠	6
White/Blue	白/藍	5
Blue	藍	4
White/Green	白/綠	3
Orange	橘	2
White/Orange	白/橘	1
Wire Color		Plug

Pin Out

Twist
對絞Twist
對絞Twist
對絞Twist
對絞

UNIT:mm			TITLE RJ, ODVA PLASTIC, C5E SHLD CABLE W/SR, M, MOLDING, 3LOCK
TOLERANCE .X ±0.25 .XX ±0.1 .XXX ±0.05 ANGLES ±1°	SCALE 1:1	SIZE A4	SHEET 1 OF 1
REV. C	WC-REV. A.9	 :Inspection item	

Amphenol LTW

安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY	DATE
DWG NO ROP-5SAMMM-TLM7BXX	Feng_Li	2016-07-18
CUSTOMER	CHECKED BY	DATE
ALTW	Jinhai	2016-07-18
	APPROVED BY	DATE
	Jerry	2016-07-18