
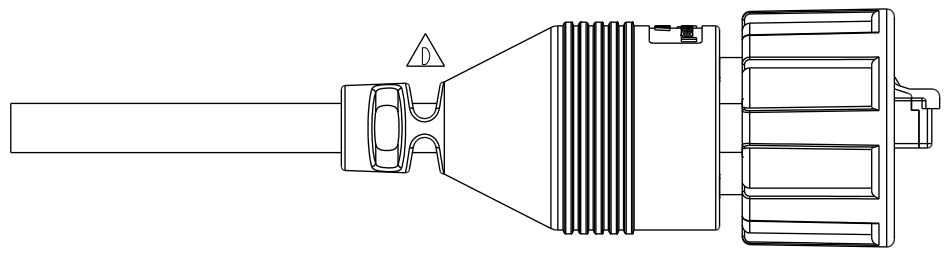
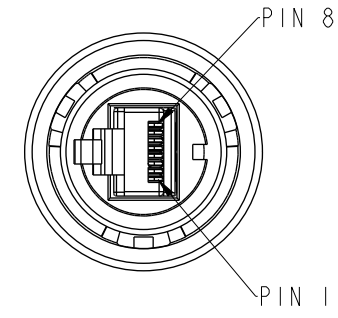


THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	LEN1670234	2016/07/18	Feng_Li	Add Cable Length Tolerance
C	C201856	2020/11/25	Vicky	$\triangle C$ X3
D	C241048	2024/09/11	Ruru	$\triangle D$ X2

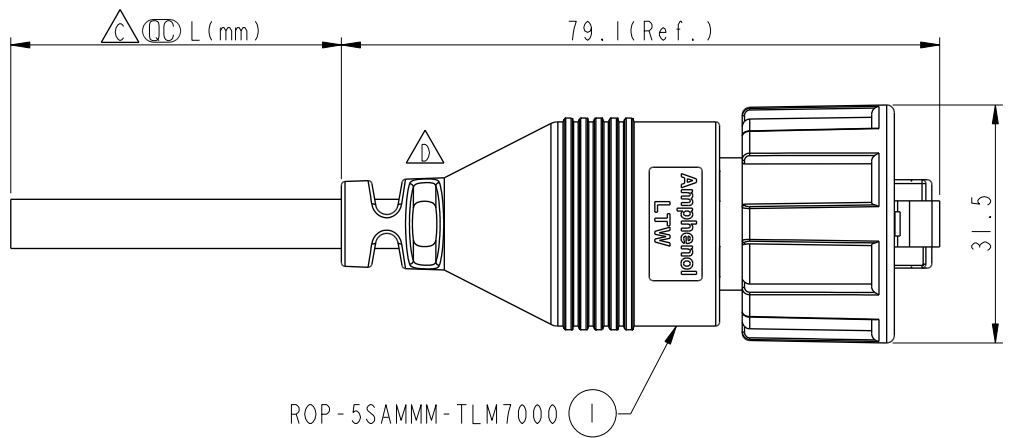

- $\triangle C$ Note:
- * \odot Important Dimension
 - * Waterproof Rate: IP67, Mated
 - * Housing: Thermoplastic, Black
 - * Plug: PC, Gold Plated, Shielded
 - * Lock Nut: Thermoplastic, Black
 - * Gasket: Rubber, Gray
 - * Seal: Rubber, Gray
 - * Sealing Nut: Thermoplastic, Black
 - * Cable: FTP, 24#*4P+MY+D+AL/MY, OD6.5, Black
- $\triangle B$ * Cable Length Tolerance: 01M:±40mm
02M~05M:±60mm
06M~10M:±100mm
11M~30M:±200mm
31M~99M:±500mm

ROP-5SAMMM-TLM7000 I

ROP-5SAMMM-TLM7BXX

XX: 01~99Meter
01: 01Meter
02: 02Meters
:
:
99: 99Meters

Cable Length(L):01~99Meters

Drain Wire	接地	Shield	
Brown	棕	8	Twist 對絞
White/Brown	白/棕	7	
Green	綠	6	Twist 對絞
White/Blue	白/藍	5	
Blue	藍	4	Twist 對絞
White/Green	白/綠	3	
Orange	橘	2	Twist 對絞
White/Orange	白/橘	1	
Wire Color		Plug	

Pin Out

UNIT:mm			TITLE RJ, ODVA PLASTIC, C5E SHLD CABLE W/SR, M, MOLDING, 3LOCK
TOLERANCE .X ±0.25 .XX ±0.1 .XXX ±0.05 ANGLES ±1°	SCALE 1:1	SIZE A4	SHEET 1 OF 1
	REV. D	WC-REV. A.9	\odot : Inspection item

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY Ruru	DATE 2024-09-11
DWG NO ROP-5SAMMM-TLM7BXX	CHECKED BY Rita	DATE 2024-09-11
CUSTOMER ALTW	APPROVED BY Fred	DATE 2024-09-11