


THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.




REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	C220646	2022/04/28	Vicky	△B X2
C	C221777	2022/11/15	Vicky	△C X6
D	C230129	2023/02/09	Ruru	△D X2

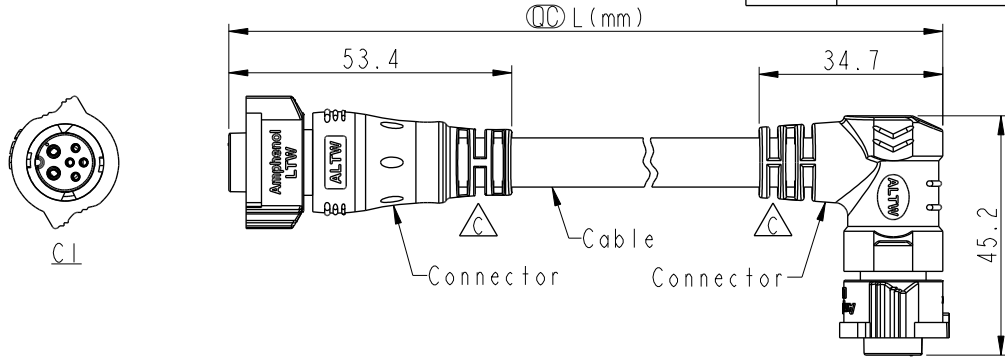


AB-BBD XX FL-BBDFR-QF XXX

△B XX: No. Of Pin

XXX: 0.5~99Meters
 A05: 0.5 Meter
 001: 01 Meter
 002: 02 Meters
 ...
 099: 99 Meters

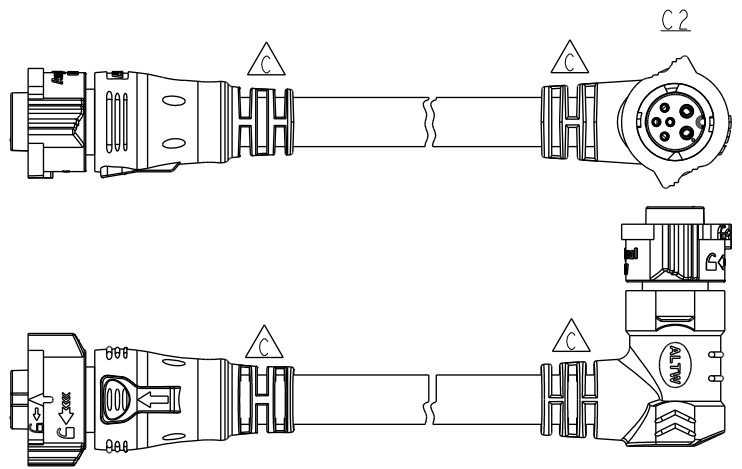

C2
Pin Assignments
Front View



C1
Pin Assignments
Front View

6	Blue (26AWG)	藍	Twist 對線
5	Red (26AWG)	紅	
4	Green (26AWG)	綠	Twist 對線
3	White (26AWG)	白	
2	Black (16AWG)	黑	
1	White (16AWG)	白	
C1 & C2	Wire Color		
Pin Out			

Note:

- * RoHS Compliant
- * Ⓞ Important dimension
- * C1
- △D Waterproof rate: IP68, mated 1m/24h
 Housing: Thermoplastic, Black
 Pin: Copper alloy, Gold plated
 O-Ring: Rubber, Dark gray
 Nut: Thermoplastic, Black
 Outer Mold: Thermoplastic, Black
- * C2
- △D Waterproof rate: IP68, mated 1m/24h
 Housing: Thermoplastic, Black
 Pin: Copper alloy, Gold plated
 O-Ring: Rubber, Dark gray
 Nut: Thermoplastic, Black
 Outer Mold: Thermoplastic, Black
- * Cable: UL21996, 16#*2C+AL/MY+(26#*2P+AL/MY), PVC Jacket, Black, OD9.3mm
- * Cable length tolerance: 0.5M < L ≤ 1M: +60/-0 mm
 1M < L ≤ 3M: +120/-0 mm
 3M < L ≤ 5M: +160/-0 mm
 5M < L ≤ 10M: ±100 mm
 10M < L ≤ 20M: ±200 mm
 20M < L ≤ 30M: ±300 mm
 30M < L ≤ 99M: ±500 mm

UNIT:mm		TITLE ACC, XLOK, B-10A+5A, DB-ENDED FF	Amphenol LTW		ITEM NO	DRAWN BY Vicky	DATE 2020-01-20
TOLERANCE ±0.5mm		SCALE 1:2	SIZE A4	SHEET 1 OF 1	DWG NO AB-BBDXXFL-BBDFR-QFXXX	CHECKED BY Rita	DATE 2020-01-20
		REV. D	WC-REV. A.5	Ⓞ: Inspection item	CUSTOMER ALTW	APPROVED BY Max	DATE 2020-01-20

安費諾亮泰企業股份有限公司