


THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.


REV.	ECN NO.	DATE	SIGN	DESCRIPTION
A		2020/01/20	Vicky	Initial Released
B	C220471	2022/03/25	Vicky	△B X2
C	C230132	2023/02/10	Ruru	△C X2

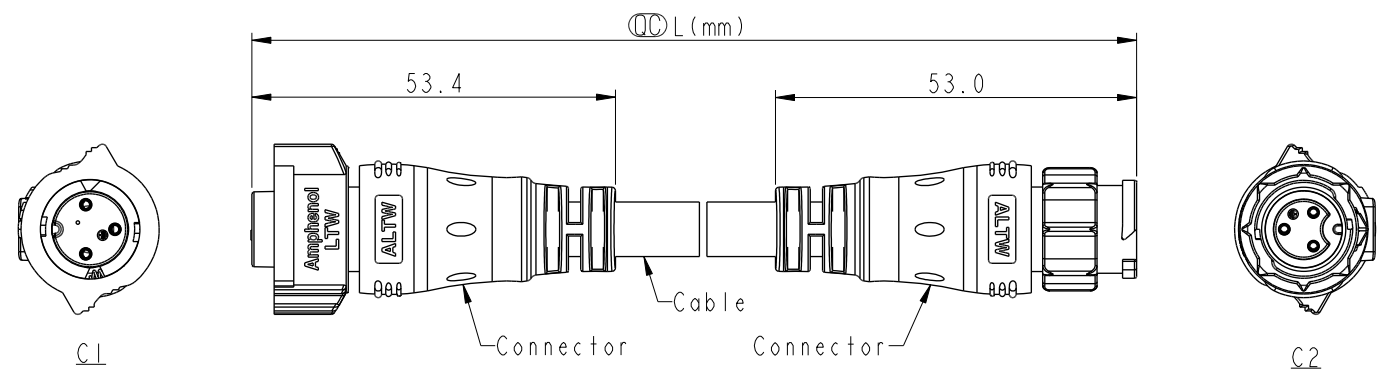

Pin Out	Wire	Wire Color
3	White	白
2	Green	綠
1	Black	黑

Pin #	Wire
①	Black
②	Green
③	White

Pin Assignments Front View

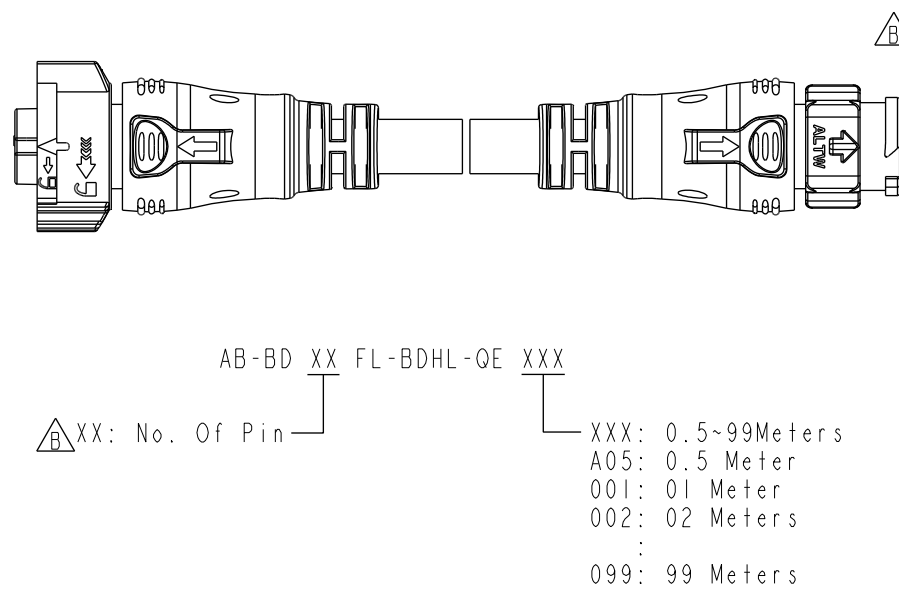

- Note:**
- * RoHS Compliant
 - * \varnothing Important dimension
 - * C1
 - Waterproof rate: IP68, mated 1m/24h
 - Housing: Thermoplastic, Black
 - Pin: Copper alloy, Gold plated
 - O-Ring: Rubber, Dark gray
 - Nut: Thermoplastic, Black
 - Outer Mold: Thermoplastic, Black
 - * C2
 - Waterproof rate: IP68, mated 1m/24h
 - Housing: Thermoplastic, Black
 - Pin: Copper alloy, Gold plated
 - Outer Mold: Thermoplastic, Black
 - * Cable: SJTW, 18#*3C, PVC Jacket, Black, OD8.0mm
 - * Cable length tolerance:
 - 0.5M < L ≤ 1M: +60/-0 mm
 - 1M < L ≤ 3M: +120/-0 mm
 - 3M < L ≤ 5M: +160/-0 mm
 - 5M < L ≤ 10M: ±100 mm
 - 10M < L ≤ 20M: ±200 mm
 - 20M < L ≤ 30M: ±300 mm
 - 30M < L ≤ 99M: ±500 mm

UNIT:mm TOLERANCE ±0.5mm	TITLE ACC, XLOK, B-5A, DB-ENDED FM		Amphenol LTW 安費諾亮泰企業股份有限公司		ITEM NO	DRAWN BY Vicky	DATE 2020-01-20
	SCALE 1:2	SIZE A4			SHEET 1	OF 1	DWG NO AB-BDXXFL-BDHL-QEXXX
	REV. C	WC-REV. A.5	\varnothing Inspection item		CUSTOMER ALTW	APPROVED BY Max	DATE 2020-01-20