




</																	

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.




C1

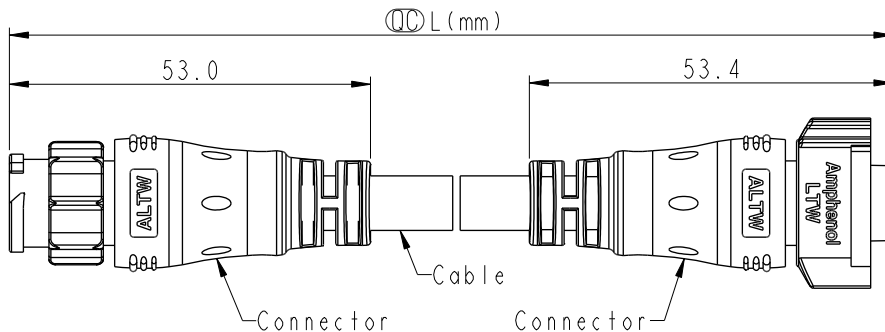


C2

Pin Out	3	White	白
	2	Green	綠
	1	Black	黑
	Pin #	Wire	



3P



3P

Pin Assignments
Front View

AB-BD XX HL-BDBL-QE XXX



XX: No. Of Pin

XXX: 0.5~99Meters
A05: 0.5 Meter
001: 01 Meter
002: 02 Meters
:
099: 99 Meters



Note:

* RoHS Compliant

* \odot Important dimension

* C1

$\triangle C$ Waterproof rate: IP68, mated 1m/24h

Housing: Thermoplastic, Black

Pin: Copper alloy, Gold plated

Outer Mold: Thermoplastic, Black

* C2

$\triangle C$ Waterproof rate: IP68, mated 1m/24h

Housing: Thermoplastic, Black

Pin: Copper alloy, Gold plated

O-Ring: Rubber, Dark gray

Nut: Thermoplastic, Black

Outer Mold: Thermoplastic, Black

* Cable: SJTW, 18#*3C, PVC Jacket, Black, OD8.0mm

* Cable length tolerance: 0.5M < L ≤ 1M: +60/-0 mm

1M < L ≤ 3M: +120/-0 mm

3M < L ≤ 5M: +160/-0 mm

5M < L ≤ 10M: ±100 mm

10M < L ≤ 20M: ±200 mm

20M < L ≤ 30M: ±300 mm

30M < L ≤ 99M: ±500 mm

UNIT:mm	
TOLERANCE	±0.5mm

TITLE ACC, XLOK, B-5A, DB-ENDED MF			
SCALE 1:2	SIZE A4	SHEET 1 OF 1	
REV. C	WC-REV. A.5	\odot Inspection item	

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY Vicky	DATE 2020-01-20
DWG NO AB-BDXXHL-BDBL-QEXXX	CHECKED BY Rita	DATE 2020-01-20
CUSTOMER ALTW	APPROVED BY Max	DATE 2020-01-20