





THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

REV.	ECN NO.	DATE	SIGN	DESCRIPTION

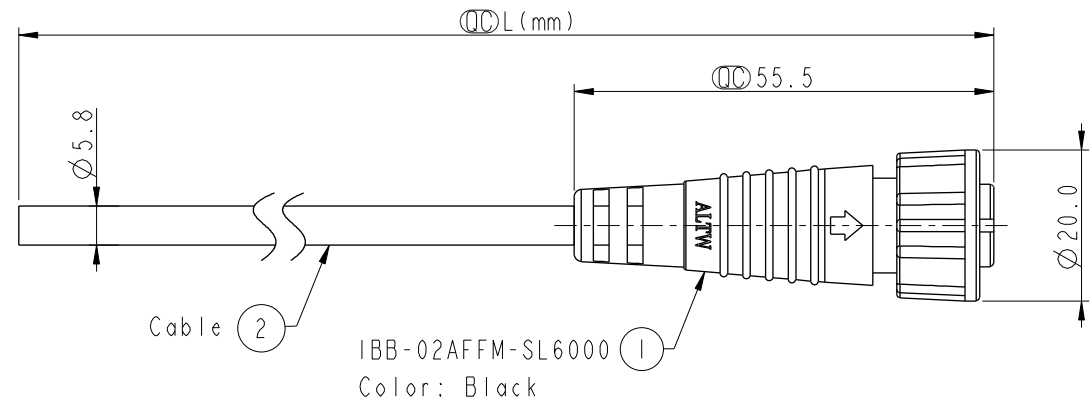

Pin Assignments  
Front View



IBB-02AFFM-SL6A XX

- XX : 01~99Meters
- 01 : 01Meter
- 02 : 02Meters
- ...
- 99 : 99Meters

Cable Length(L):01~99Meters

- Note:
- \*  $\varnothing$  Important Dimension To Check
  - \* Waterproof Rate: IP66
  - \* Housing: Nylon+GF, Black
  - \* Female Pin: Copper Alloy, Gold Plated
  - \* Cable: UL2464 20AWG\*2C+D+AL/My PVC Jacket UV Resistant, OD=5.8, Black
  - \* Cable Length Tolerance: 01M:  $\pm 40$ mm  
02M~05M:  $\pm 60$ mm  
06M~10M:  $\pm 100$ mm  
11M~30M:  $\pm 200$ mm  
31M~99M:  $\pm 500$ mm

2	Red	紅
1	Green	綠
Conn.	Wire Color	
Pin Out		

UNIT:mm		TOLERANCE		TITLE	
$\pm 0.5$ mm		SCALE 1:1		STANDARD CNC PIN	
REV. A		SIZE A4		CABLE SCREW 2PIN F CONN F PIN	
WC-REV. A.1		SHEET 1 OF 1		CUSTOMER	
				ALTW	

Amphenol LTW  
安費諾亮泰企業股份有限公司

ITEM NO	DWG NO	CUSTOMER	DRAWN BY	CHECKED BY	APPROVED BY	DATE
	IBB-02AFFM-SL6AXX	ALTW	Ruru	Tony	Victor	2014-01-15
						2014-01-15
						2014-01-15