


THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

REV.	ECN NO.	DATE	SIGN	DESCRIPTION
A		2020/01/09	Ruru	Initial Released
B	C220462	2022/03/29	Ruru	△B X2
C	C230117	2023/02/07	Vicky	△C X2

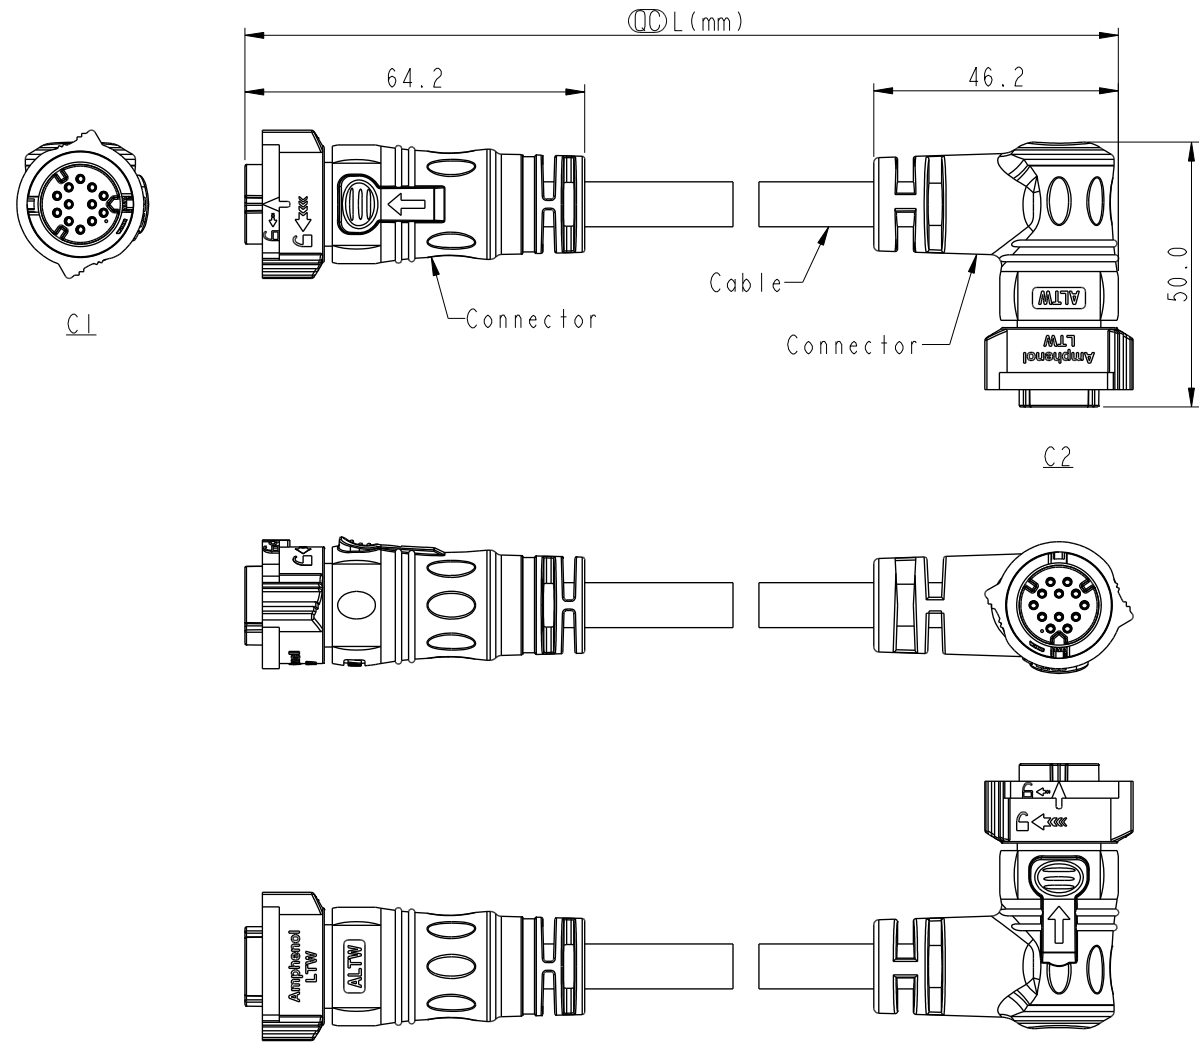

Note: △

- * RoHS Compliant
- * Ⓞ Important dimension
- * C1
- △ Waterproof rate: IP68, mated 1m/24h
Housing: Thermoplastic, Black
Pin: Copper Alloy, Gold Plated
O-Ring: Rubber, Gray
Nut: Thermoplastic, Black
Outer mold: Thermoplastic, Black
- * C2
- △ Waterproof rate: IP68, mated 1m/24h
Housing: Thermoplastic, Black
Pin: Copper Alloy, Gold Plated
O-Ring: Rubber, Gray
Nut: Thermoplastic, Black
Outer mold: Thermoplastic, Black
- * Cable: UL21388, PVC Jacket, Black
- * Cable length tolerance: 0.5M < L ≤ 1M: +60/-0 mm
1M < L ≤ 3M: +120/-0 mm
3M < L ≤ 5M: +160/-0 mm
5M < L ≤ 10M: ±100 mm
10M < L ≤ 20M: ±200 mm
20M < L ≤ 30M: ±300 mm
30M < L ≤ 99M: ±500 mm

UNIT: mm		TITLE	ACC, XLOK, C-5A, DB-ENDED FF	
TOLERANCE	±0.5 mm	SCALE	1:2	SIZE A4
		REV.	C	WC-REV.
			Ⓞ: Inspection item	

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO.	DRAWN BY	DATE
	Ruru	2020-01-09
DWG NO.	CHECKED BY	DATE
AB-CDXXFL-CDFR-QDXXX	Rita	2020-01-09
CUSTOMER	APPROVED BY	DATE
ALTW	Max	2020-01-09

