


THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF AMPHENOL LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY AMPHENOL LTW.



REV.	ECN NO.	DATE	SIGN	DESCRIPTION
A		2021-08-27	Allen Pan	Rev.03 To Rev.A
B	C230091	2023-02-02	Ruru	$\triangle B$ XI

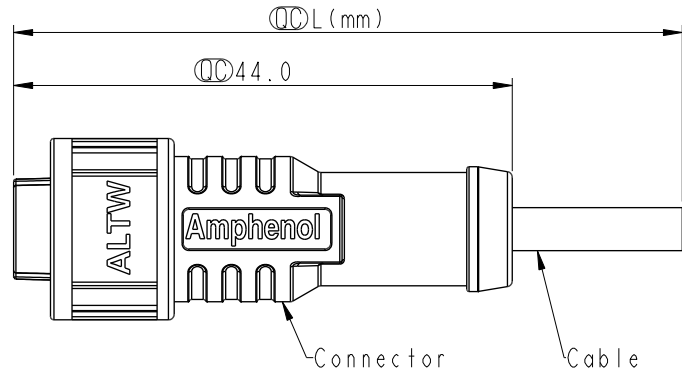

AD-XXBFFM-QL8PXX



XX: No. Of Pin

XX: 01~15Meters
 01: 01Meter
 02: 02Meters
 ...
 15: 15Meters

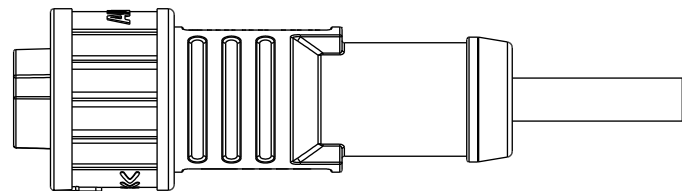

Note:

- * RoHS Compliant
- * \varnothing Important Dimension
- $\triangle B$ * Waterproof Rate: IP68, Mated 1m/24h
- * Connector
- Housing: Thermoplastic, Black
- Pin: Copper Alloy, Gold Plated
- O-Ring: Rubber, Black
- Nut: Thermoplastic, Black
- Outer Mold: Thermoplastic, Black
- * Cable: IEC61156-12, 26#*1P+AL/MY+B, OD=3.8mm, PUR Jacket, Green
- * Cable Length Tolerance: 1M: +50/-0 mm
 1M < L ≤ 3M: +100/-0 mm
 3M < L ≤ 5M: +150/-0 mm
 5M < L ≤ 10M: ±100 mm
 10M < L ≤ 15M: ±200 mm

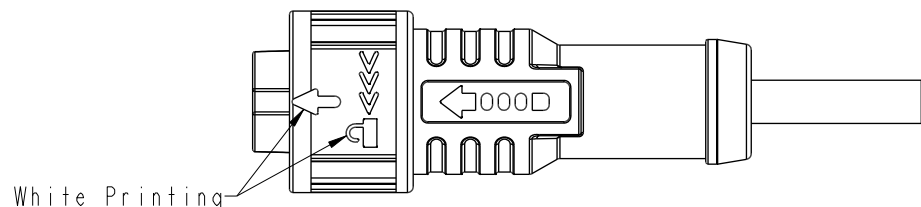

2Pin

3	White	白
1	Blue	藍
Pin#	Wire	

Pin Assignments Front View

UNIT:mm		TITLE	XLOK, A-5A, CABLE W/O SR F CONN., F PIN, MOLDING		
TOLERANCE		SCALE	SIZE	SHEET	OF
±0.5mm		3:2	A4	1	1
REV.	WC-REV.	\varnothing : Inspection item			
B	A.1				

Amphenol LTW
 安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY	DATE
	Allen Pan	2021-08-27
DWG NO	CHECKED BY	DATE
AD-XXBFFM-QL8PXX	Sam Ho	2021-08-27
CUSTOMER	APPROVED BY	DATE
ALTW	Fred Lee	2021-08-27