
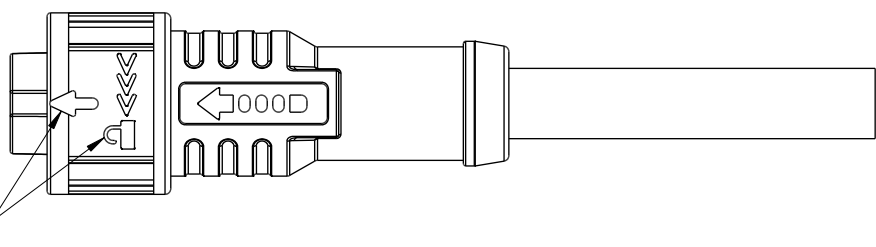
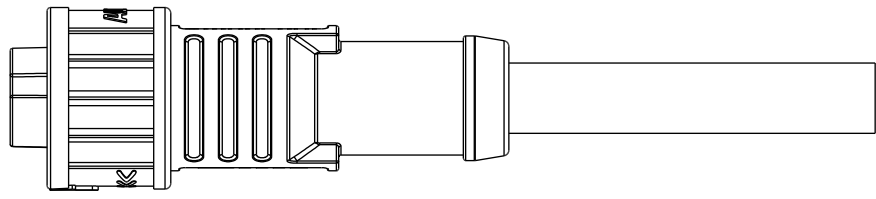



THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF AMPHENOL LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY AMPHENOL LTW.

REV.	ECN NO.	DATE	SIGN	DESCRIPTION
C	C192012	2019/11/18	Allen Pan	X4
D	C220487	2022/03/30	Vicky	X6
E	C230091	2023/02/02	Ruru	X1

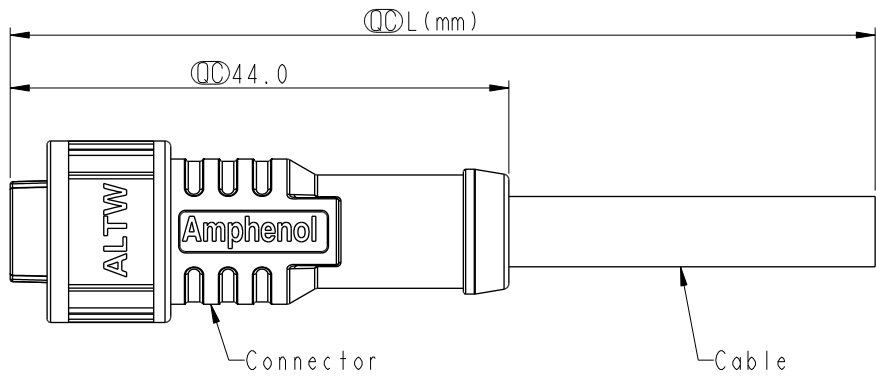

Note:
 * RoHS Compliant
 * Important dimension
 * Waterproof rate: IP68, mated 1m/24h
 * Connector
 Housing: Thermoplastic, Black
 Pin: Copper alloy, Gold plated
 O-Ring: Rubber, Black
 Nut: Thermoplastic, Black
 Outer mold: Thermoplastic, Black
 * Cable: UL21388, PVC Jacket, Black
 * Cable length tolerance: 1M: +50/-0 mm

1M < L ≤ 3M:	+100/-0 mm
3M < L ≤ 5M:	+150/-0 mm
5M < L ≤ 10M:	±100 mm
10M < L ≤ 20M:	±200 mm
20M < L ≤ 30M:	±300 mm
30M < L ≤ 99M:	±500 mm

UNIT:mm			TITLE	
TOLERANCE	±0.5mm		XLOK, A-5A, CABLE W/O SR F, F, MOLDING, PUSH LOCK	
SCALE	3:2	SIZE	A4	SHEET 1 OF 2
REV.	E	WC-REV.		: Inspection item

Amphenol LTW
 安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY	DATE
	Gill Lai	2019-09-02
DWG NO	CHECKED BY	DATE
AD-XXBFFM-QL8DXX	Sam Ho	2019-09-02
CUSTOMER	APPROVED BY	DATE
ALTW	Fred Lee	2019-09-02

