
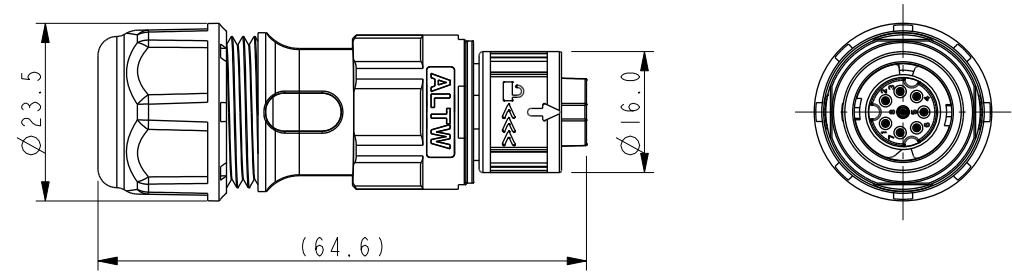


THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.


| REV. | ECN NO. | DATE | SIGN | DESCRIPTION |
|------|---------|------------|-----------|------------------|
| A | | 2020-02-04 | Allen Pan | Rev.04 To Rev.A |
| B | C211084 | 2021-07-15 | Allen Pan | $\triangle B$ x2 |

AU - XX B F F B - Q L 8 A P 0

06: 6Pin
08: 8Pin

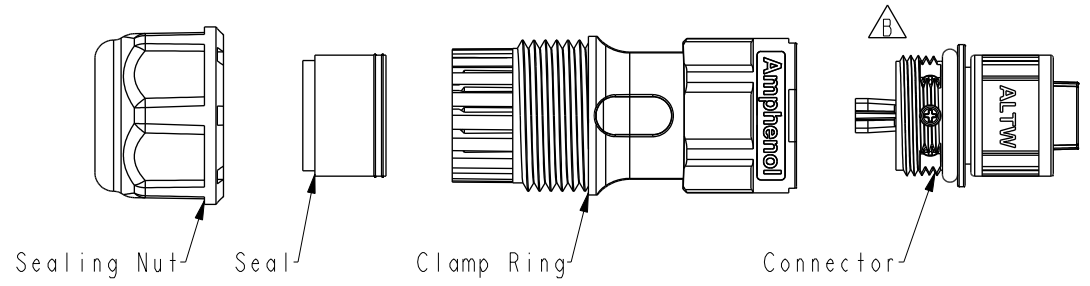

- $\triangle B$ Note:
- * RoHS Compliant
 - * $\text{\textcircled{C}}$ Important Dimension
 - * Waterproof Rate: IPX8, Mated 1m/24h
 - * Connector
 - Housing: Thermoplastic, Black
 - Pin: Copper Alloy, Gold Plated
 - Nut: Thermoplastic, Black
 - O-Ring: Rubber, Gray
 - * Clamp Ring: Thermoplastic, Black
 - * Sealing Nut: Thermoplastic, Black
 - * Seal 1: Rubber, Red, OD: $\varnothing 4.0\text{mm} \sim \varnothing 6.0\text{mm}$
 - * Seal 2: Rubber, Blue, OD: $\varnothing 6.0\text{mm} \sim \varnothing 8.0\text{mm}$
 - * One set unassembled in one PE bag

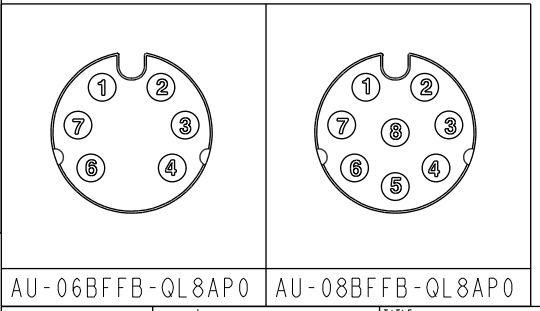

AU-06BFFB-QL8AP0 AU-08BFFB-QL8AP0

| | | | | | |
|---------------------------|--|--|--|----------------|--|
| UNIT:mm | | | TITLE X-Lok A-Size Field Installable Screw-in Type F Conn. F Pin | | |
| TOLERANCE ± 0.5 mm | | | SCALE 1:1 | SIZE A4 | SHEET 1 OF 1 |
| | | | REV. B | WC-REV. A.6 | $\text{\textcircled{C}}$: Inspection item |

Amphenol LTW
安費諾亮泰企業股份有限公司

| | | |
|----------------------------|-------------------------|--------------------|
| ITEM NO | DRAWN BY Allen Pan | DATE 2020-02-04 |
| DWG NO AU-XXBFFB-QL8AP0 | CHECKED BY Sam Ho | DATE 2020-02-04 |
| CUSTOMER ALTW | APPROVED BY Fred Lee | DATE 2020-02-04 |