
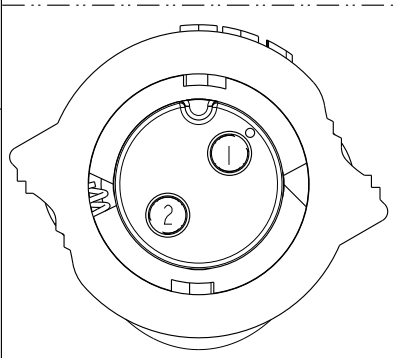
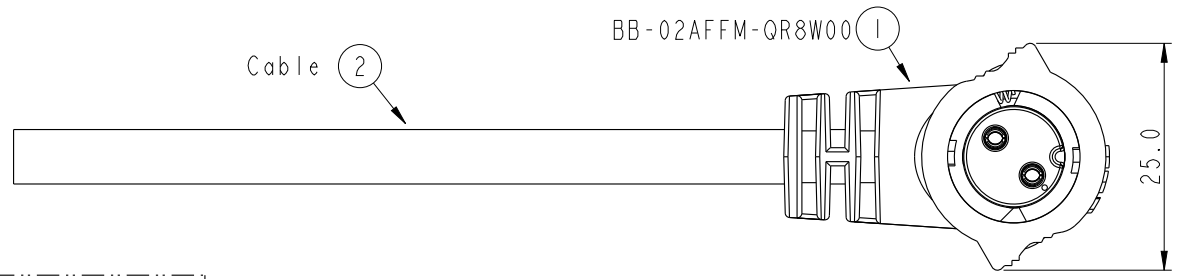



THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF AMPHENOL LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY AMPHENOL LTW.

REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	LEN1540298	2015-04-16	Micky	Modify #2 Wire Colore
C	LEN1720196	2017-02-13	Frank Deng	Change dimension from 34.0 to 34.7

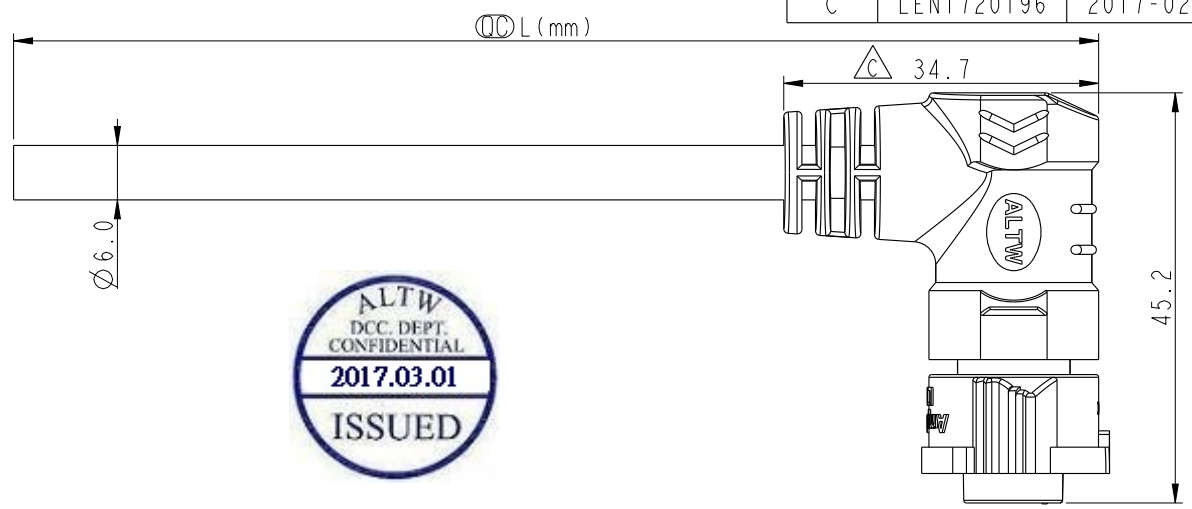

2	Red	紅	⚠
1	Black	黑	
Conn.	Wire Color		
Pin Out			

BB-02AFFM-QR8DXX

↑

XX : 01~99Meters  
 01 : 01Meter  
 02 : 02Meters  
 :  
 :  
 :  
 99 : 99Meters

Note:

- \* Ⓞ Important Dimension To Check.
- \* Waterproof Rate: IP68(Mated, 1M/24H)
- \* Working Voltage Rating: AC 300 V
- \* Working Current Rating: 10A
- \* Flame Class: UL94V-0
- \* Housing: Nylon+GF, Black.(UV Resistance)
- \* Female Pin: Copper Alloy, Gold Plated.
- \* Rubber: Silicon, Gray
- \* Cable: UL21388 16AWG\*2C+AL+My  
PVC Jacket UV Resistant, OD=6.0, Black.
- \* Cable Length Tolerance: 01M:±40mm  
02M~05M:±60mm  
06M~10M:±100mm  
11M~30M:±200mm  
31M~99M:±500mm

UNIT:mm		
TOLERANCE .X	±0.5	

TITLE X-Lok B-Size Molding F Conn F 2 Pin			
SCALE 6:5	SIZE A4	SHEET 1 OF 1	
REV. C	WC-REV. A.2	Ⓞ: Inspection item	

**Amphenol LTW**  
 安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY Frank Deng	DATE 2017-02-13
DWG NO BB-02AFFM-QR8DXX	CHECKED BY Spring Liu	DATE 2017-02-13
CUSTOMER ALTW	APPROVED BY Kevin Hu	DATE 2017-02-13