
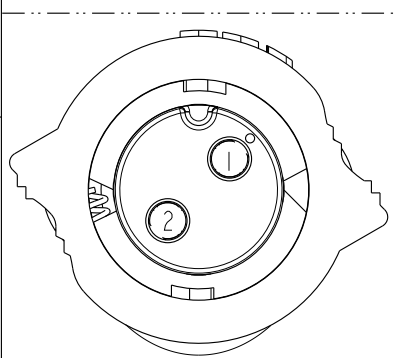
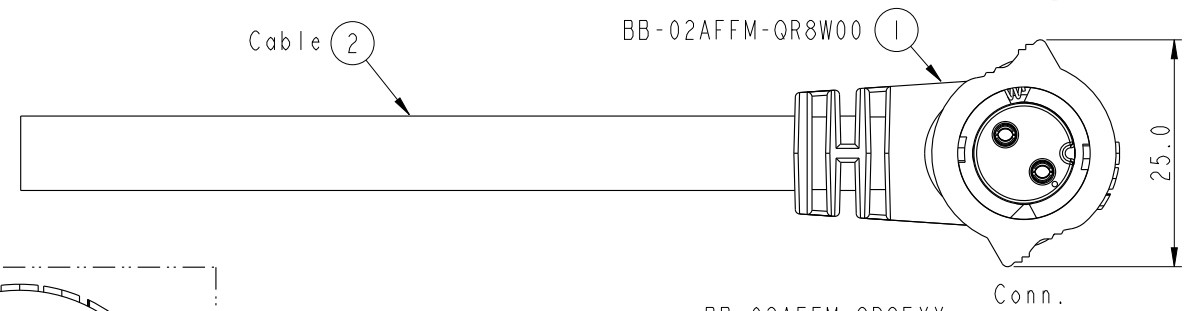



THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	LEN1720197	2017-02-13	Frank Deng	Change dimension from 34.0 to 34.7

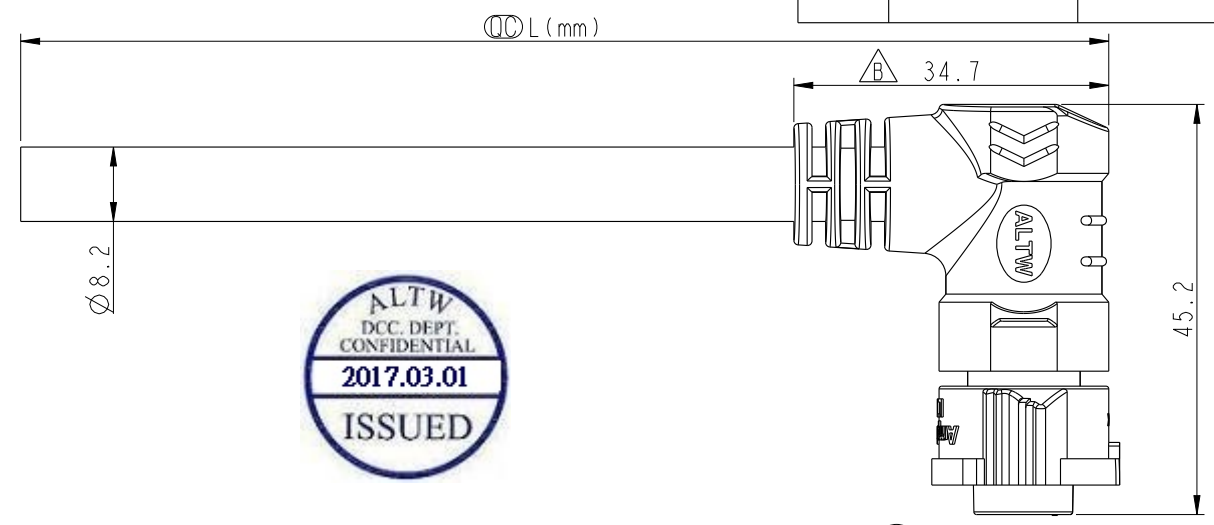

Pin Assignments
Front View

2	White	白
1	Black	黑
Conn.	Wire Color	
Pin Out		

BB-02AFFM-QR8EXX

XX : 01~99Meters
01 : 01Meter
02 : 02Meters
:
:
:
99 : 99Meters

Note:

- * Ø Important Dimension To Check.
- * Waterproof Rate: IP68(Mated)
- * Working Voltage Rating: AC 300 V
- * Working Current Rating: 10A
- * Flame Class: UL94V-0 (UV Resistance)
- * Housing: Nylon+GF, Black.
- * Female Pin: Copper Alloy, Gold Plated.
- * Rubber: Silicon, Gray
- * Cable: SJTW 16AWG*2C + Filler
PVC Jacket UV Resistant, OD=8.2, Black.
- * Cable Length Tolerance: 01M:±40mm
02M~05M:±60mm
06M~10M:±100mm
11M~30M:±200mm
31M~99M:±500mm

UNIT:mm		TOLERANCE .X ±0.5		TITLE X-Lok B-Size (Power) Molding F Conn F 2 Pin		ITEM NO		DRAWN BY Frank Deng		DATE 2017-02-13	
SCALE 6:5		SIZE A4		SHEET 1 OF 1		DWG NO BB-02AFFM-QR8EXX		CHECKED BY Spring Liu		DATE 2017-02-13	
REV. B		WC-REV. A.1		QC: Inspection item		CUSTOMER ALTW		APPROVED BY Kevin Hu		DATE 2017-02-13	

Amphenol LTW
安費諾亮泰企業股份有限公司