



THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.



REV.	ECN NO.	DATE	SIGN	DESCRIPTION
A	Initial Release	2016-02-16	Wes	Change Rev.01 To Rev.A
B	LE31660475	2016-06-23	Wes	Change Part NO. of Half-finished

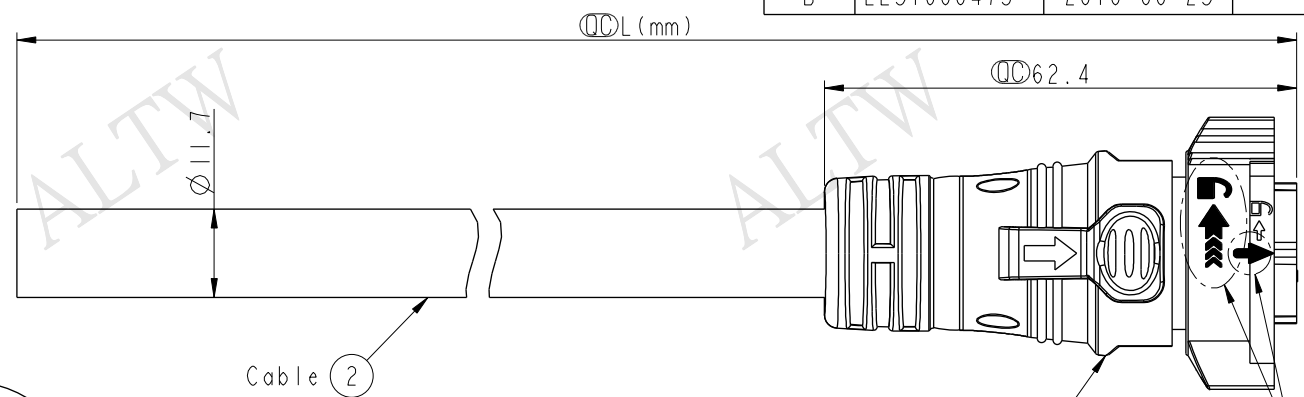

Conn.

△ DC-03AFFM-QL8WOP (1)
Color: Black

QC Printing White
白色印刷

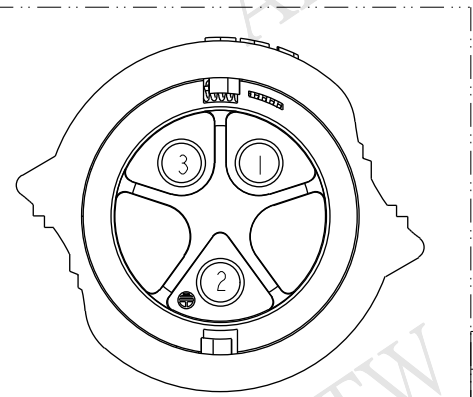

Pin Assignments
Front View

3	Green	綠
2	White	白
1	Black	黑
Conn.	Wire Color	
Pin Out		

DC-03AFFM-QL8DXX

XX : 01~99Meters
01 : 01Meter
02 : 02Meters
:
99 : 99Meters

Cable Length(L): 01~99Meters

- Note:
- * QC Important Dimension To Check.
 - * Working Voltage Rating: AC 300V
 - * Working Current Rating: Max. 20A
 - * Waterproof Rate: IP68(Mated)
In 1 meters water within 24hours.
 - * Housing: Nylon+GF, Black(UV Resistance)
 - * Female Pin: Copper Alloy, Gold & Ni Plated
 - * Cable: SJTW 12AWG*3C, PVC Jacket,
OD=11.7, Black.
 - * Cable Length Tolerance: 01M:±40mm
02M~05M:±60mm
06M~10M:±100mm
11M~30M:±200mm
31M~99M:±500mm

UNIT:mm		TOLERANCE		TITLE	
±0.5				X-Lok D Size Cable Molding 3Pin F Connector F Pin(20A)	
SCALE	1:1	SIZE	A4	SHEET	1 OF 1
REV.	B	WC-REV.	A.5	QC: Inspection item	

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO		DRAWN BY		DATE	
DWG NO		CHECKED BY		DATE	
CUSTOMER		APPROVED BY		DATE	
ALTW		Kevin Hu		2016-06-23	