

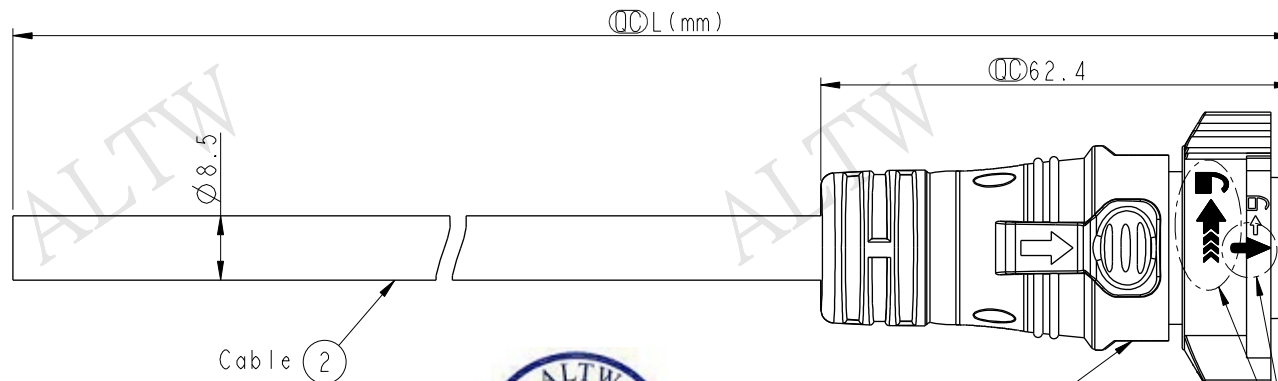


REV.	ECN NO.	DATE	SIGN	DESCRIPTION

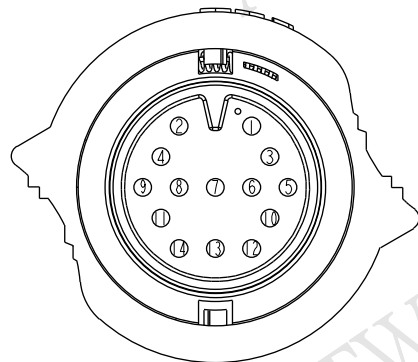

DD-14AFMM-QL8W00  
Color: Black

Printing White  
白色印刷



Pin Assignments  
Front View

14	Brown/White	棕/白
13	Black/White	黑/白
12	Light Green	淡綠
11	Pink	粉紅
10	White	白
9	Gray	灰
8	Purple	紫
7	Blue	藍
6	Green	綠
5	Yellow	黃
4	Orange	橙
3	Red	紅
2	Brown	棕
1	Black	黑
Conn.	Wire Color	
Pin Out		

DD-14AFMM-QL8DXX

XX : 01~99Meters  
01 : 01Meter  
02 : 02Meters  
:  
99 : 99Meters

Cable Length(L): 01~99Meters

Note:

- \* Important Dimension To Check.
- \* Working Voltage Rating: AC 300V
- \* Working Current Rating: 5A
- \* Flame Class: UL94V-0 (UV Resistance)
- \* Waterproof Rate: IP68(Mated)
- \* Housing: Nylon+GF, Black
- \* Male Pin: Copper Alloy, Gold Plated
- \* Cable: UL21388 20AWG\*14C+AL.Mylar Black, PVC Jacket UV Resistant, OD=8.5
- \* Cable Length Tolerance: 01M:±40mm  
02M~05M:±60mm  
06M~10M:±100mm  
11M~30M:±200mm  
31M~99M:±500mm

UNIT:mm		TITLE	X-Lok D Size Cable Molding 14Pin F Connector M Pin(5A)		
TOLERANCE	±0.5	SCALE	1:1	SIZE	A4
		REV.	A	WC-REV.	A.1
				QC	Inspection item

Amphenol LTW  
安費諾亮泰企業股份有限公司

ITEM NO	DWG NO	CUSTOMER	DRAWN BY	CHECKED BY	APPROVED BY	DATE
	DD-14AFMM-QL8DXX	ALTW	Micky	Spring	Kevin	2014-12-24
						2014-12-24
						2014-12-24

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.