



THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

REV.	ECN NO.	DATE	SIGN	DESCRIPTION

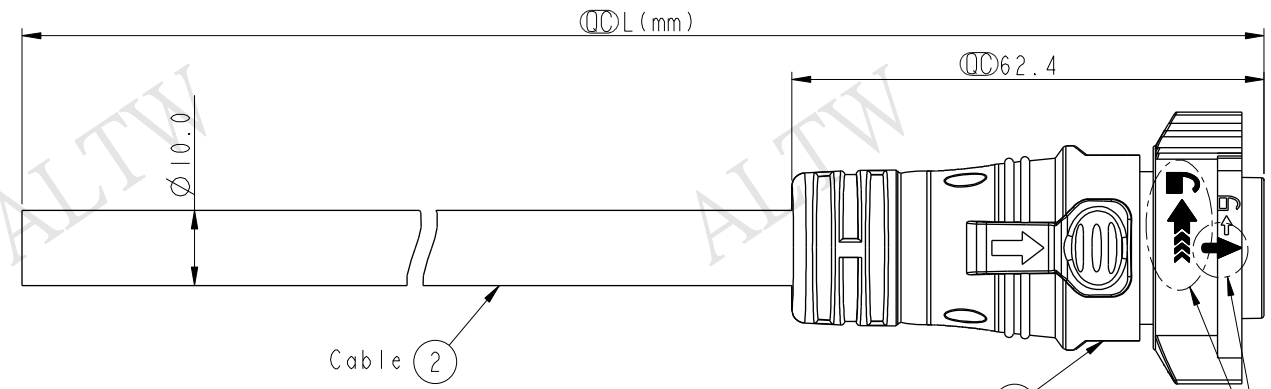

Conn.

DD-18AFMM-QL8W00  
Color: Black

Printing White  
白色印刷




DD-18AFMM-QL8DXX

XX :01~99Meters  
01 :01Meter  
02 :02Meters  
:  
99 :99Meters

Cable Length(L):01~99Meters


Note:

- \* Important Dimension To Check.
- \* Working Voltage Rating: AC 300V
- \* Working Current Rating: 5A
- \* Flame Class: UL94V-0 (UV Resistance)
- \* Waterproof Rate: IP68(Mated)
- \* Housing: Nylon+GF, Black
- \* Male Pin: Copper Alloy, Gold Plated
- \* Cable: UL21388 20AWG\*18C+AL.Mylar Black, PVC Jacket UV Resistant, OD=10.0
- \* Cable Length Tolerance:01M:±40mm  
02M~05M:±60mm  
06M~10M:±100mm  
11M~30M:±200mm  
31M~99M:±500mm



18	Blue/White	藍/白
17	Green/White	綠/白
16	Orange/White	橙/白
15	Red/White	紅/白
14	Brown/White	棕/白
13	Black/White	黑/白
12	Light Green	淡綠
11	Pink	粉紅
10	White	白
9	Gray	灰
8	Purple	紫
7	Blue	藍
6	Green	綠
5	Yellow	黃
4	Orange	橙
3	Red	紅
2	Brown	棕
1	Black	黑
Conn.	Wire Color	

Pin Out

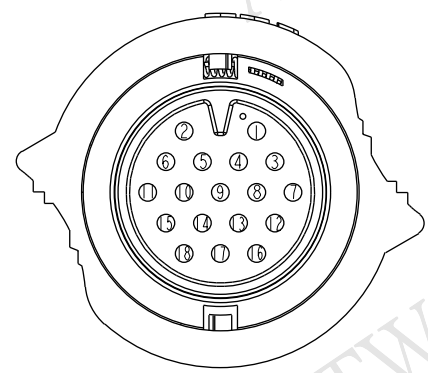

Pin Assignments  
Front View

UNIT:mm		TOLERANCE		TITLE		ITEM NO		DRAWN BY		DATE	
±0.5				X-Lok D Size Cable Molding 18Pin F Connector M Pin(5A)		DD-18AFMM-QL8DXX		Micky		2014-12-24	
				SCALE 1:1		DWG NO		CHECKED BY		DATE	
				SIZE A4		ALTW		Spring		2014-12-24	
				SHEET 1 OF 1		CUSTOMER		APPROVED BY		DATE	
				REV. A				Kevin		2014-12-24	
				WC-REV. A.1							
				QC:Inspection item							

Amphenol LTW  
安費諾亮泰企業股份有限公司