| REV. | ECN NO. | DATE | SIGN | DESCRIPTION |
|---|---|---|---|---|
| | | | | |

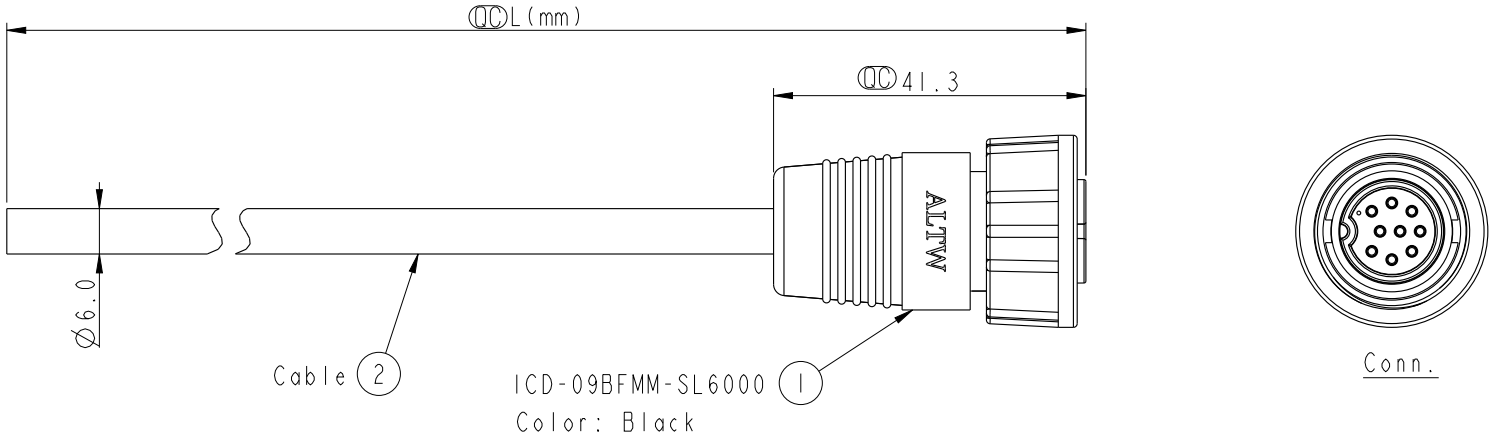




Conn.






Pin Assignments
Front View

| | | |
|---|---|---|
| 9 | Black | 黑 |
| 8 | Red | 紅 |
| 7 | Pink | 粉紅 |
| 6 | Gary | 灰 |
| 5 | Yellow | 黃 |
| 4 | Green | 綠 |
| 3 | White | 白 |
| 2 | Blue | 藍 |
| 1 | Brown | 棕 |
| Conn. | Wire Color | |
| Pin Out | | |

ICD-09BFMM-SL6AXX

XX: 01~99Meters
01: 01Meter
02: 02Meters
:
:
XX: 99Meters
Cable Length(L): 01~99Meters

Note:
* QC Important Dimension To Check.
* Waterproof Rate: IP66
* Housing: Nylon+GF,Black.
* Male Pin: Copper Alloy, Gold Plated.
* Screw Nut: Nylon+GF. Black
* O-Ring: Silicon, Gary.
* Cable: UL2464 24AWG*9C+Drain+Al/My PVC Jacket UV Resistant, OD=6.0, Black.
* Cable Length Tolerance: 01M: 40mm
  02M~05M: ±60mm
  06M~10M: ±100mm
  11M~30M: ±200mm
  31M~99M: ±500mm

UNIT: mm

TOLERANCE ±0.5

TITLE: MIDDLE CNC PIN CABLE SCREW 9P F CONN M PIN

SCALE 1:1 | SIZE A4 | SHEET 1 OF 1

REV. A | WC-REV. A.1 | QC: Inspection item

**Amphenol LTW**
安費諾亮泰企業股份有限公司

| | | |
|---|---|---|
| ITEM NO | DRAWN BY: Lin_rensong | DATE: 2013-11-29 |
| DWG NO: ICD-09BFMM-SL6AXX | CHECKED BY: Tony_leng | DATE: 2013-11-29 |
| CUSTOMER: ALTW | APPROVED BY: Victor | DATE: 2013-11-29 |

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.