


THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	C240236	2024/03/12	Vicky	$\triangle B$ X3

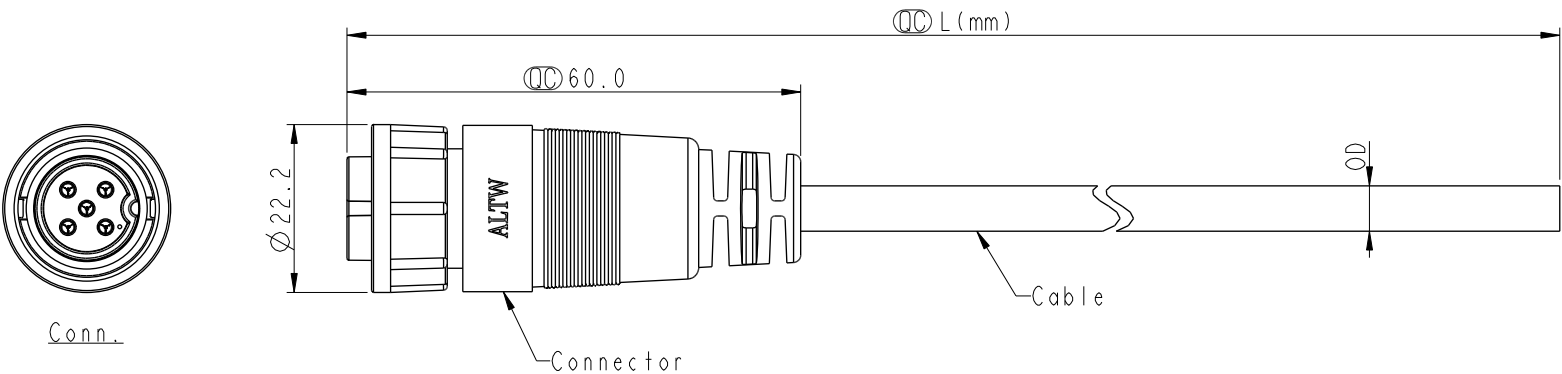


5	Green 綠	4	White 白
4	White 白	3	Black 黑
3	Black 黑	2	Blue 藍
2	Blue 藍	1	Brown 棕
1	Brown 棕		

4	White 白
3	Black 黑
2	Blue 藍
1	Brown 棕

Pin # Wire Pin # Wire

Pin Out

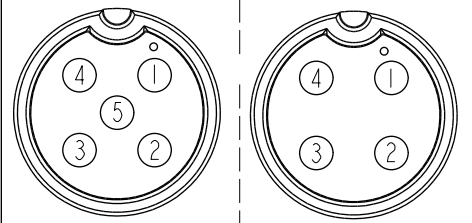

5 Pin 4 Pin

Pin Assignments Front View

ACB-XXAFMM-LL7AXX

XX: No. Of Pin XX :01~99Meters
 01 :01Meter
 02 :02Meters
 :
 99 :99Meters

Cable Length(L):01~99Meters

- $\triangle B$ Note:
- * CC Important dimension
 - * Waterproof Rate: IP67, mated
 - * Connector Housing: Thermoplastic, Black
 - $\triangle B$ Pin: Copper Alloy, Gold Plated
 - O-Ring: Rubber, Gray
 - Nut: Thermoplastic, Black
 - Outer mold: Thermoplastic, Black
 - * Cable: UL2464, 20AWG+D+AL/MY, PVC Jacket, UV Resistant, Black
 - * Cable Length Tolerance: 01M:±40mm
 02M~05M:±60mm
 06M~10M:±100mm
 11M~30M:±200mm
 31M~99M:±500mm

5P	PVC	6.0	20	ACB-05AFMM-LL7AXX
4P		5.5		ACB-04AFMM-LL7AXX
Contacts	Cable Jacket	Cable OD	AWG	Item No.

UNIT:mm	
TOLERANCE	±0.5mm

TITLE	N CERES, ST, C-10A, CABLE W/SR F, M, MOLDING, 2LOCK $\triangle B$		
SCALE	1:1	SIZE	A4
REV.	B	WC-REV.	A.1
		CC	Inspection item

Amphenol LTW
 安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY	DATE
	Vicky	2024-03-12
DWG NO	CHECKED BY	DATE
ACB-XXAFMM-LL7AXX	Rita	2024-03-12
CUSTOMER	APPROVED BY	DATE
ALTW	Fred	2024-03-12