
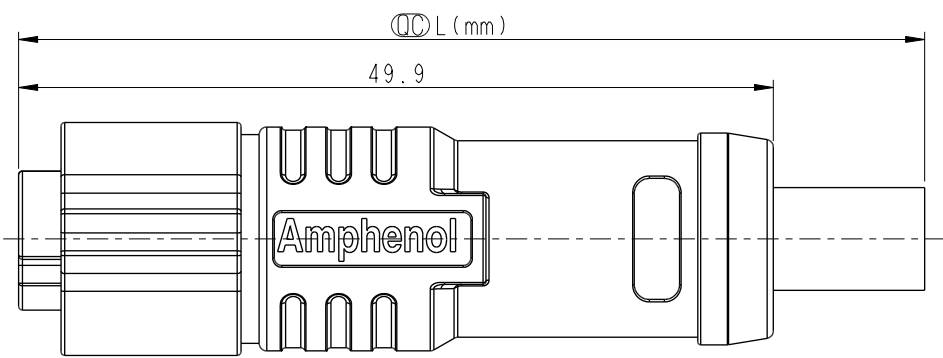


THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

8P	TPU	6.8	26	ASY-A08BFFM-QL8JXX
Contacts	Cable Jacket	Cable OD	AWG	Item No.

REV.	ECN NO.	DATE	SIGN	DESCRIPTION
A		2022-02-23	Sam Ho	Rev.01 to A, Initial Released
B	C230091	2023-02-02	Ruru	$\triangle B$ X3




ASY-AXXBFFM-QL8JXX

XX:L=0~99Meters  
 01:L=1Meters  
 02:L=2Meters  
 ...  
 99:L=99Meters

XX:No. Of Pin

Shield Braid	編織	
8 Blue	藍	Twist
7 White/Blue	白/藍	
6 Brown	棕	Twist
5 White/Brown	白/棕	
4 Green	綠	Twist
3 White/Green	白/綠	
2 Orange	橘	Twist
1 White/Orange	白/橘	

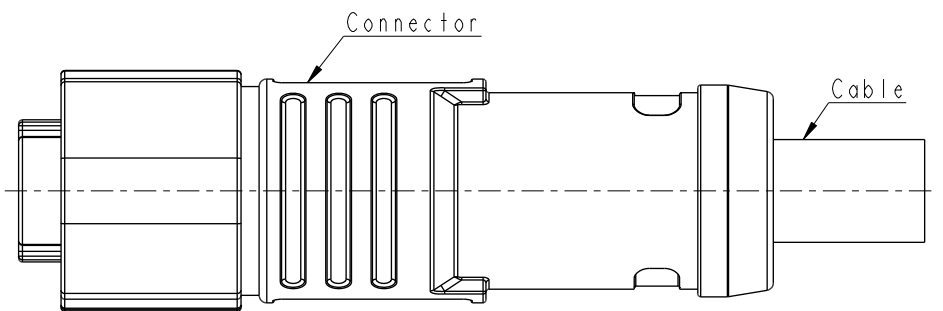



Note:

- \* RoHS Compliant
- \*  $\odot$  Important dimension
- $\triangle B$  \* Waterproof rate: IP68, mated 1m/24h
- \* Connector

Housing: Thermoplastic, Black  
 Pin: Copper alloy, Gold plated  
 Shield: Metal  
 Nut: Metal  
 Outer mold: Thermoplastic, Black

- \* Cable: CAT 6A, 26#\*4P+AL/MY+B, TPU Jacket, OD 6.8mm, GN.
- \* Cable length tolerance:

1M:	+50/-0 mm
1M < L ≤ 3M:	+100/-0 mm
3M < L ≤ 5M:	+150/-0 mm
5M < L ≤ 10M:	±100 mm
10M < L ≤ 20M:	±200 mm
20M < L ≤ 30M:	±300 mm
30M < L ≤ 99M:	±500 mm

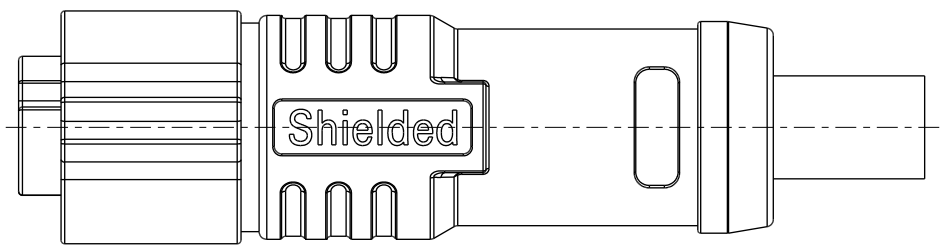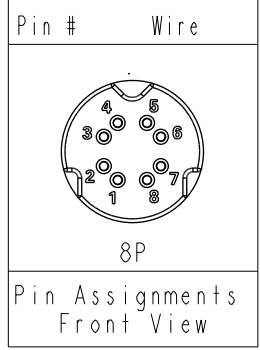

UNIT:mm	$\odot$	$\nabla$
TOLERANCE	±0.50mm	

TITLE XL0K, A SHLD-0.5A, AXXP, CABLE W/O SR F, F, MOLDING, PUSH LOCK $\triangle B$			
SCALE 2:1	SIZE A4	SHEET 1 OF 1	
REV. B	WC-REV.	$\odot$ : Inspection item	

**Amphenol LTW**  
 安費諾亮泰企業股份有限公司

ITEM NO.	DRAWN BY Sam Ho	DATE 2022-02-18
DWG NO. $\triangle B$ ASY-AXXBFFM-QL8JXX	CHECKED BY Fred Lee	DATE 2022-02-18
CUSTOMER ALTW	APPROVED BY Fred Lee	DATE 2022-02-18