


THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.


REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	C240236	2024/03/12	Vicky	△X3

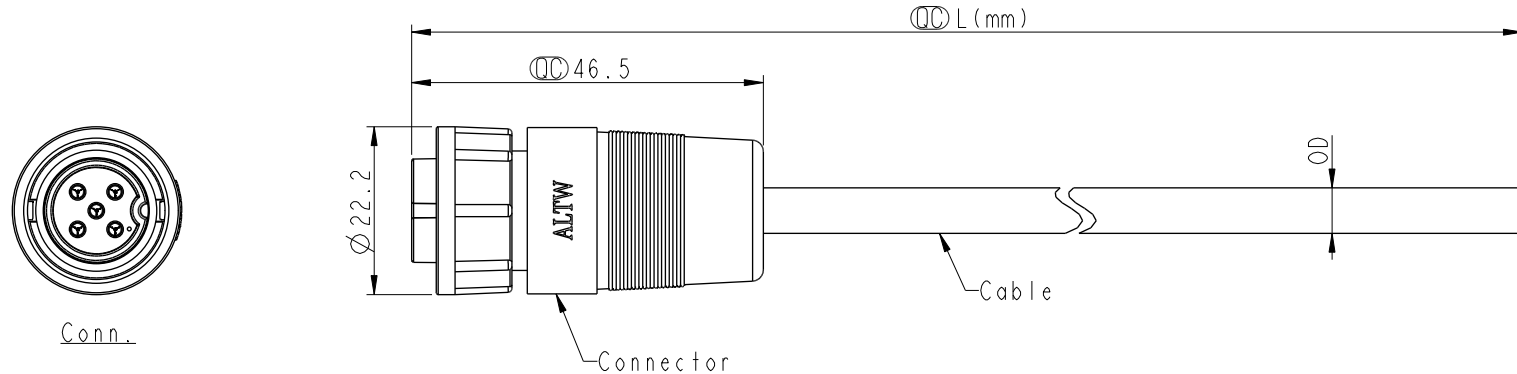

5	Green 綠	4	White 白
4	White 白	3	Black 黑
3	Black 黑	2	Blue 藍
2	Blue 藍	1	Brown 棕
1	Brown 棕		
Pin #	Wire	Pin #	Wire

ACB-XXBFMM-LL7AXX
 XX: No. Of Pin XX :01~99Meters
 01 :01Meter
 02 :02Meters
 :
 99 :99Meters
 Cable Length(L):01~99Meters

- △ Note:
- * ϕ Important dimension
 - * Waterproof Rate: IP67, mated
 - * Connector
 Housing: Thermoplastic, Black
 Pin: Copper Alloy, Gold Plated
 O-Ring: Rubber, Gray
 Nut: Thermoplastic, Black
 Outer mold: Thermoplastic, Black
 - * Cable: UL2464, 20AWG+D+AL/MY,
 PVC Jacket, UV Resistant, Black
 - * Cable Length Tolerance: 01M:±40mm
 02M~05M:±60mm
 06M~10M:±100mm
 11M~30M:±200mm
 31M~99M:±500mm

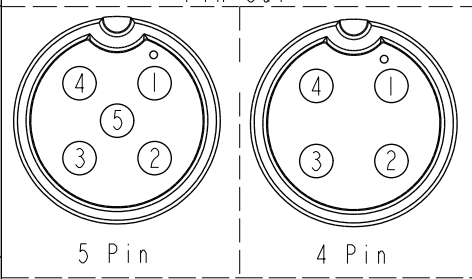

5P	PVC	6.0	20	ACB-05BFMM-LL7AXX
4P		5.5		ACB-04BFMM-LL7AXX
Contacts	Cable Jacket	Cable OD	AWG	Item No.

UNIT:mm		TITLE N CERES, ST, C-10A, CABLE W/O SR F, M, MOLDING, 2LOCK
TOLERANCE ±0.5mm	SCALE 1:1	SIZE A4
REV. B	WC-REV. A.3	SHEET 1 OF 1
Inspection item		

Amphenol LTW
 安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY Vicky	DATE 2024-03-12
DWG NO ACB-XXBFMM-LL7AXX	CHECKED BY Rita	DATE 2024-03-12
CUSTOMER ALTW	APPROVED BY Fred	DATE 2024-03-12