



THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF AMPHENOL LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY AMPHENOL LTW.

REV.	ECN NO.	DATE	SIGN	DESCRIPTION



Conn.

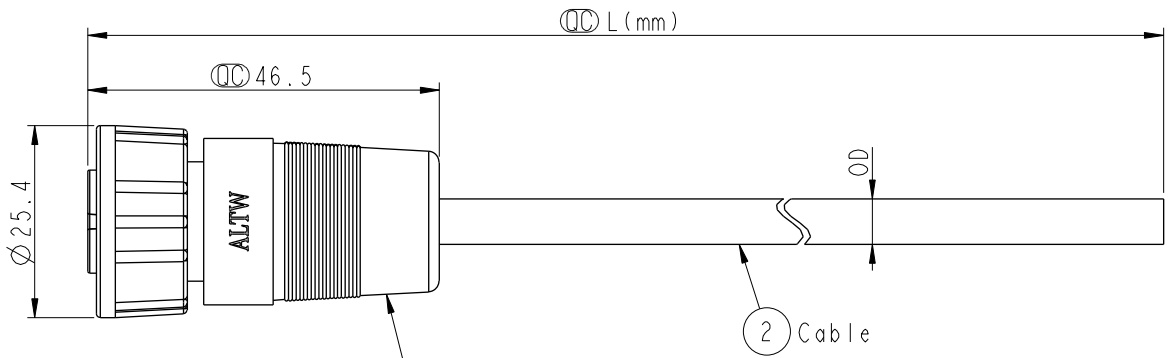

1 ACD-XXBFMM-SL7000
Color: Black




9P	PVC	6.0	24	ACD-09BFMM-SL7AXX
8P		5.5		ACD-08BFMM-SL7AXX
7P		5.8		ACD-07BFMM-SL7AXX
Contacts	Cable Jacket	Cable OD	AWG	Item No.

9	Black 黑	8	Green 綠	7	Green 綠
8	Red 紅	7	Yellow 黃	6	White 白
7	Pink 粉紅	6	Orange 橙	5	Brown 棕
6	Gray 灰	5	Red 紅	4	Red 紅
5	Yellow 黃	4	Blue 藍	3	Yellow 黃
4	Green 綠	3	White 白	2	Orange 橙
3	White 白	2	Brown 棕	1	Blue 藍
2	Blue 藍	1	Black 黑		
1	Brown 棕				
Pin # Wire		Pin # Wire		Pin # Wire	

ACD-XXBFMM-SL7AXX
07: 7Pin
09: 9Pin
XX: 01~99Meters
01: 01Meter
02: 02Meters
XX: 99Meters
Cable Length(L): 01~99Meters

Note:
 * \varnothing Important Dimension To Check
 * Waterproof Rate: IP67
 * Housing: Nylon+GF, Black
 * Male Pin: Copper Alloy, Gold Plated
 * Screw Nut: Nylon+GF, Black
 * Cable: UL2464 24AWG+Drain+Al/My, PVC Jacket UV Resistant, Black
 * Cable Length Tolerance: 01M: ±40mm
 02M~05M: ±60mm
 06M~10M: ±100mm
 11M~30M: ±200mm
 31M~99M: ±500mm

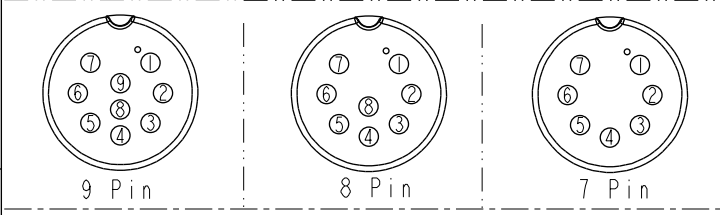

Pin Assignments Front View

UNIT:mm		TITLE Middle Cable Screw F Conn M Pin
TOLERANCE ±0.5 mm	SCALE 1:1	SIZE A4
REV. A	WC-REV. A.1	SHEET 1 OF 1
Inspection item		

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY Vicky	DATE 2017-07-18
DWG NO ACD-XXBFMM-SL7AXX	CHECKED BY Mafei	DATE 2017-07-18
CUSTOMER ALTW	APPROVED BY Max	DATE 2017-07-18