
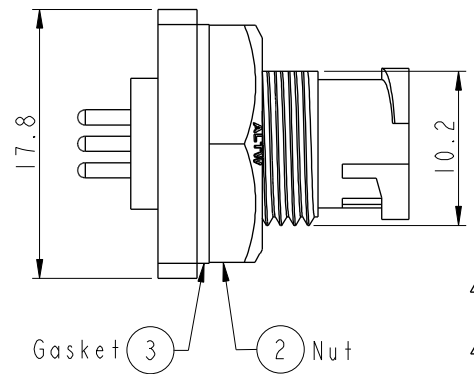
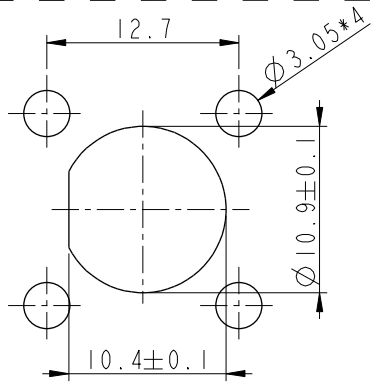


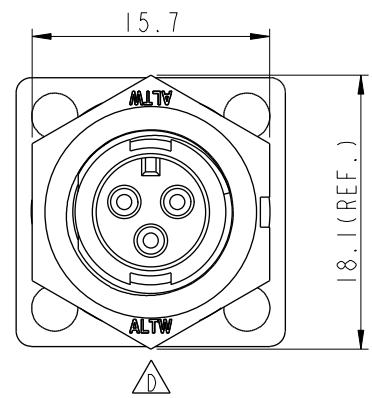
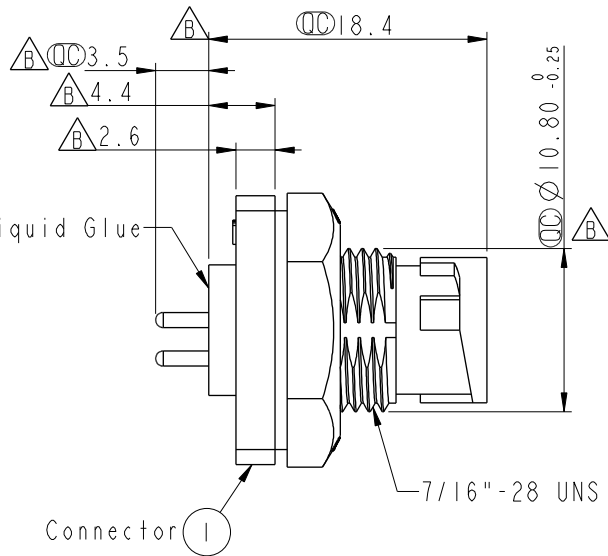


THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

REV.	ECN NO.	DATE	SIGN	DESCRIPTION
C	LEN-8A0135	2008/09/15	Shin	Add Notes
D	LEN1640066	2016/03/30	Vicky	Update Logo
E	CI90268	2019/02/18	Ruru	Modify Note

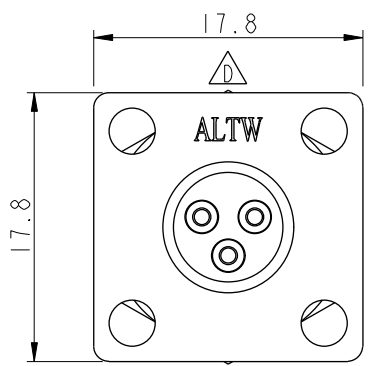

- Note: Important Dimension
- \* Waterproof Rate: IP67, Unmated
  - \* Housing: Thermoplastic, Black
  - \* Pin: Copper Alloy, Gold Plated
  - \* Nut: Thermoplastic, Black
  - \* Gasket: Rubber, Black
- \* Use with waterproof cap or dust cap  
Panel thickness max: 2.5mm
- \* Use without waterproof cap or dust cap  
Panel thickness max: 3.5mm
- \* Gasket and Nut are packed separately in PE bags.

UNIT:mm		TITLE Mini Panel Lock 3Pin M Conn. M Pin		ITEM NO AD-03PMMP-LS7001		DRAWN BY Ruru		DATE 2019-02-18	
TOLERANCE .X ±0.25 .XX ±0.1 .XXX ±0.05 ANGLES ±1°		SCALE 2:1	SIZE A4	SHEET 1 OF 1	DWG NO AD-03PMMP-LS7001	CHECKED BY Rita		DATE 2019-02-18	
REV. E		WC-REV. A.2	Inspection item		CUSTOMER ALTW	APPROVED BY Max		DATE 2019-02-18	

Amphenol LTW  
安費諾亮泰企業股份有限公司