

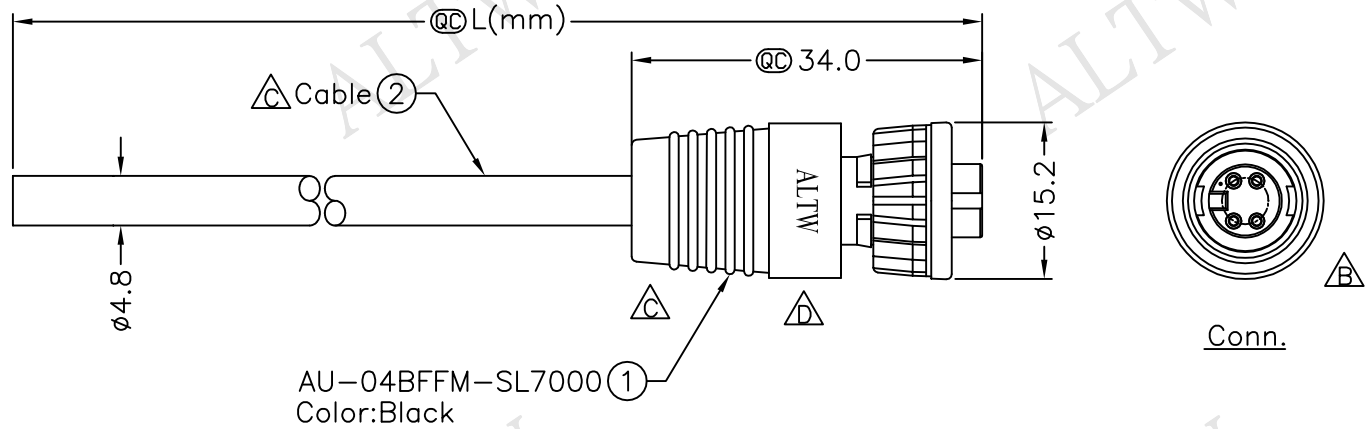



REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	LEN-0C0276~279	2010/11/25	Ivan Lin	Change View & Frame.
C	LE31110047~050	2011/01/17	Vicky	Mini Size Molding 外觀變更 & Cable.
D	LEN15C0348~351	2015/12/08	Ruru	Change Logo



Pin Assignments  
Front View

4	White	白
3	Green	綠
2	Red	紅
1	Brown	棕
Conn.	Wire Color	
	Pin Out	

AU-04BFFM-SL7AXX  
 XX:01~99Meters  
 01:01Meter  
 02:02Meters  
 :  
 :  
 99:99Meters  
 Cable Length(L):01~99Meters

- Note:
- \* @C Important Dimension
  - \* Waterproof Rate: IP67
  - \* Connector: Nylon+GF, Black
  - \* Female Pin: Copper Alloy, Gold Plated
  - \* Screw Nut: Nylon+GF, Black
  - \* O-Ring: EPDM, Black
  - \* Cable: UL2464 26AWG\*4C+D+A, PVC Jacket, UV Resistant, OD=4.8mm, Black
  - \* Cable Length Tolerance: 01M:±40mm  
02M~05M:±60mm  
06M~10M:±100mm  
11M~30M:±200mm  
31M~99M:±500mm

UNIT:mm		TITLE
TOLERANCE	±0.5 mm	Mini,Cable Screw 4P F Conn F Pin
SCALE	Free	SHEET 1 OF 1
REV.	D	SIZE A4 @C :Inspection Item

**Amphenol LTW**  
 安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY	DATE
DWG NO	CHECKED BY	DATE
CUSTOMER	APPROVED BY	DATE
AU-04BFFM-SL7AXX	Ruru	2015/12/08
ALTW	Rita	2015/12/08
	Lisa	2015/12/08

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.