

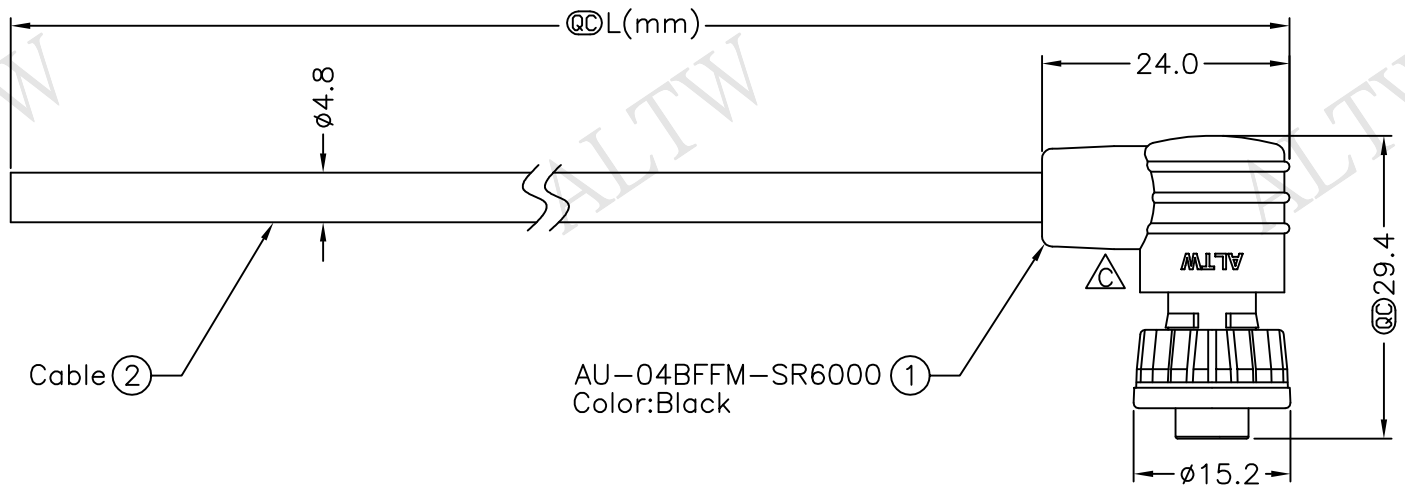




REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	LEN-0C0281~286	2010/11/25	Ivan Lin	Change View & Frame
C	LEN15B0150~155	2015/11/06	Vicky	Update Logo



AU-04BFFM-SR6AXX
 XX:01~99Meters
 01:01Meter
 02:02Meters
 :
 :
 99:99Meters
 Cable Length(L):01~99Meters



- Note:
- * @C Important Dimension To Check.
 - * Waterproof Rate: IP66
 - * Housing: Nylon+G,FBlack
 - * Female Pin: Copper Alloy, Gold Plated
 - * Cable: UL2464 26AWG*4C+Drain+Al/My, PVC Jacket, UV Resistant, OD=4.8mm, Black
 - * Cable Length Tolerance: 01M:±40mm
 02M~05M:±60mm
 06M~10M:±100mm
 11M~30M:±200mm
 31M~99M:±500mm



Pin Assignments
Front View

White	白	4
Green	綠	3
Red	紅	2
Brown	棕	1
Wire Color		Conn.
Pin Out		

UNIT:mm	
TOLERANCE	±0.5 mm

TITLE		Mini	
Cable Screw 4Pin F Conn F Pin			
SCALE	Free	SHEET	1 OF 1
REV.	C	SIZE	A4
@C :Inspection Item			

Amphenol LTW
 安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY	DATE
DWG NO	CHECKED BY	DATE
CUSTOMER	APPROVED BY	DATE
	Vicky	2015/11/06
AU-04BFFM-SR6AXX	Rita	2015/11/06
ALTW	Lisa	2015/11/06

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

1 2 3 4 5 6 7 8

F

E

D

C

B

A

8 FMW10702-01-01A2