




REV.	ECN NO.	DATE	SIGN.	DESCRIPTION
B	LE3-910044~7	2008/12/26	TOMMY	ADD Dimension & NOTE
C	LEN-0C0293~5	2010/10/16	Li Xiu Zhi	Change View
D	LEN15C0358~61	2015/12/08	Ruru	Change Logo

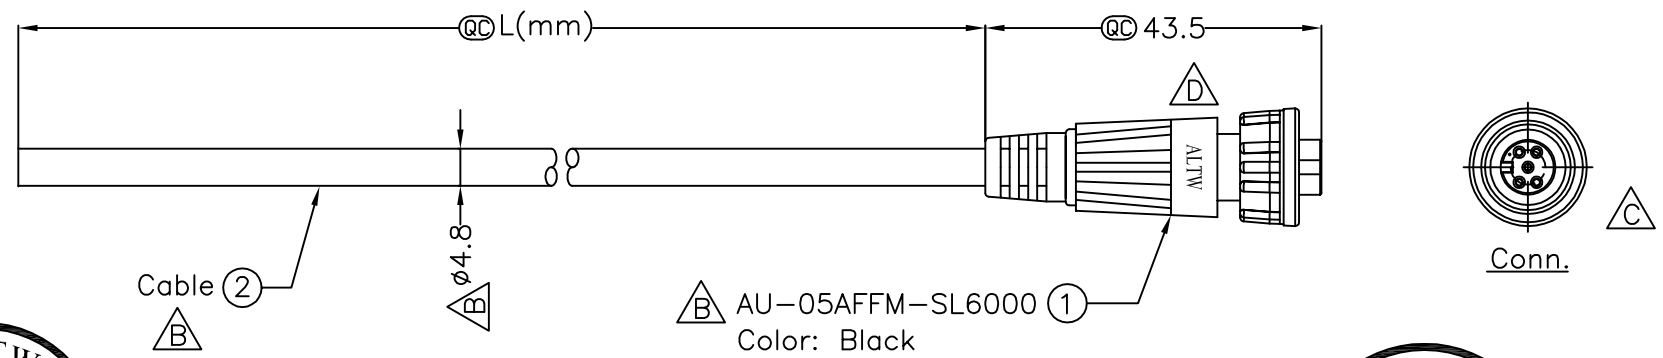


AU-05AFFM-SL6AXX

XX:01~99Meters
 01:01Meter
 02:02Meters
 :
 :
 99:99Meters

Cable Length(L):01~99Meters

- Note:
- * @C Important Dimension To Check.
 - * Waterproof Rate: IP66
 - * Connector: Nylon+GF, Black
 - * Female Pin: Copper Alloy, Gold Plated
 - * Cable: UL2464 26#*5C+Drain+Al.My PVC Jacket UV Resistant OD=4.8mm, Black
 - * Cable Length Tolerance: 01M:±40mm
 02M~05M:±60mm
 06M~10M:±100mm
 11M~30M:±200mm
 31M~99M:±500mm



Yellow	黃	5
White	白	4
Red	紅	3
Brown	棕	2
Green	綠	1
Wire Color	Conn.	
Out Pin		

UNIT:mm	
TOLERANCE	±0.5

TITLE		Mini Cable Screw 5P F Conn F Pin	
SCALE	Free	SHEET	1 OF 1
REV.	D	SIZE	A4
@C :Inspection Item			

Amphenol LTW
 安費諾亮泰企業股份有限公司

ITEM NO	
DWG NO	AU-05AFFM-SL6AXX
CUSTOMER	ALTW

DRAWN BY	Ruru
CHECKED BY	Rita
APPROVED BY	Lisa

DATE	2015/12/08
DATE	2015/12/08
DATE	2015/12/08

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.