



REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	LE3-0C0165~168	2010/11/26	Ivan Lin	Change View & Frame
C	LEN15C0378~381	2015/12/08	Ruru	Change Logo

F  
E  
D  
C  
B  
A

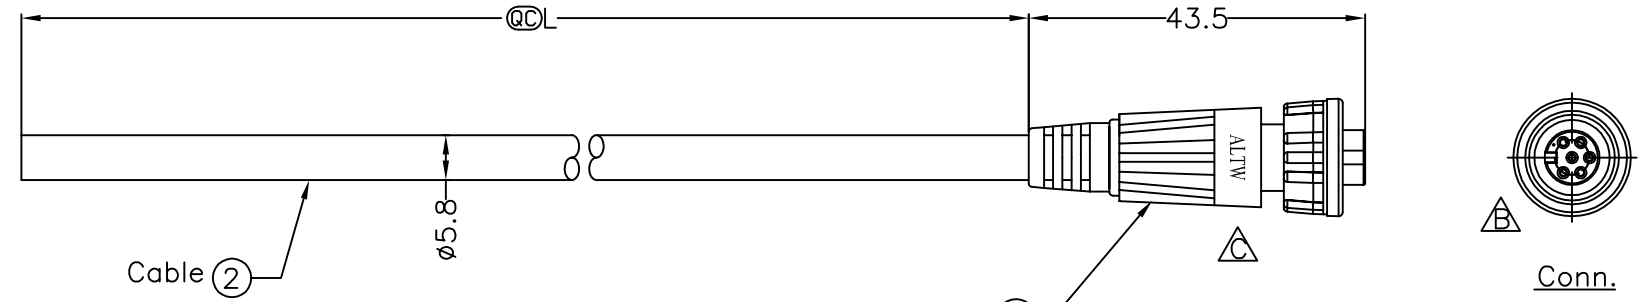


Cable ②

AU-06AFFM-SL6000 ①  
Color: Black




AU-06AFFM-SL6AXX  
 ↑  
 XX:01~99Meters  
 01:01Meter  
 02:02Meters  
 :  
 :  
 99:99Meters  
 Cable Length(L):01~99Meters

- Note:
- \* @Important Dimension.
  - \* Waterproof Rate: IP66
  - \* Connector: Nylon+GF, Black
  - \* Screw Nut: Nylon+GF, Black
  - \* O-Ring: EPDM, Black
  - \* Cable:UL2464 24AWG\*6C+D+AL/My, UV Resistant, OD=5.8mm, Black
  - \* Cable Length Tolerance: 01M:±40mm  
 02M~05M:±60mm  
 06M~10M:±100mm  
 11M~30M:±200mm  
 31M~99M:±500mm



Pin Assignments  
Front View 前視圖

White	白	6
Red	紅	5
Orange	橙	4
Yellow	黃	3
Green	綠	2
Blue	藍	1
Wire Color		Conn.
Out Pin		



UNIT:mm	
TOLERANCE	±0.5

TITLE 6Pin Female Connector Female Pin(2A)	
SCALE Free	SHEET 1 OF 1
REV. C	SIZE A4
QC : Inspection Item	

**Amphenol LTW**  
安費諾亮泰企業股份有限公司

ITEM NO	
DWG NO	AU-06AFFM-SL6AXX
CUSTOMER	ALTW

DRAWN BY	Ruru
CHECKED BY	Rita
APPROVED BY	Lisa

DATE	2015/12/08
DATE	2015/12/08
DATE	2015/12/08

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.