

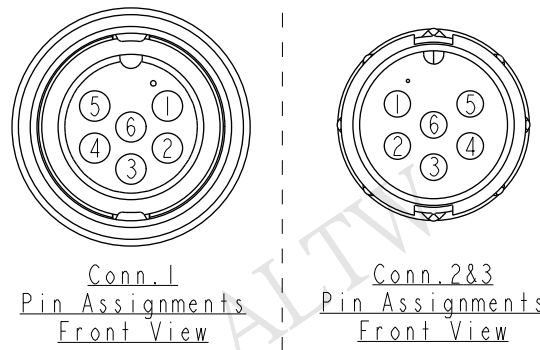


THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	LEN-950004	2009/04/07	Jiang Jun Hua	Add Mark
C	LEN14C0385	2014/12/05	Vicky	Update Logo & Dimension

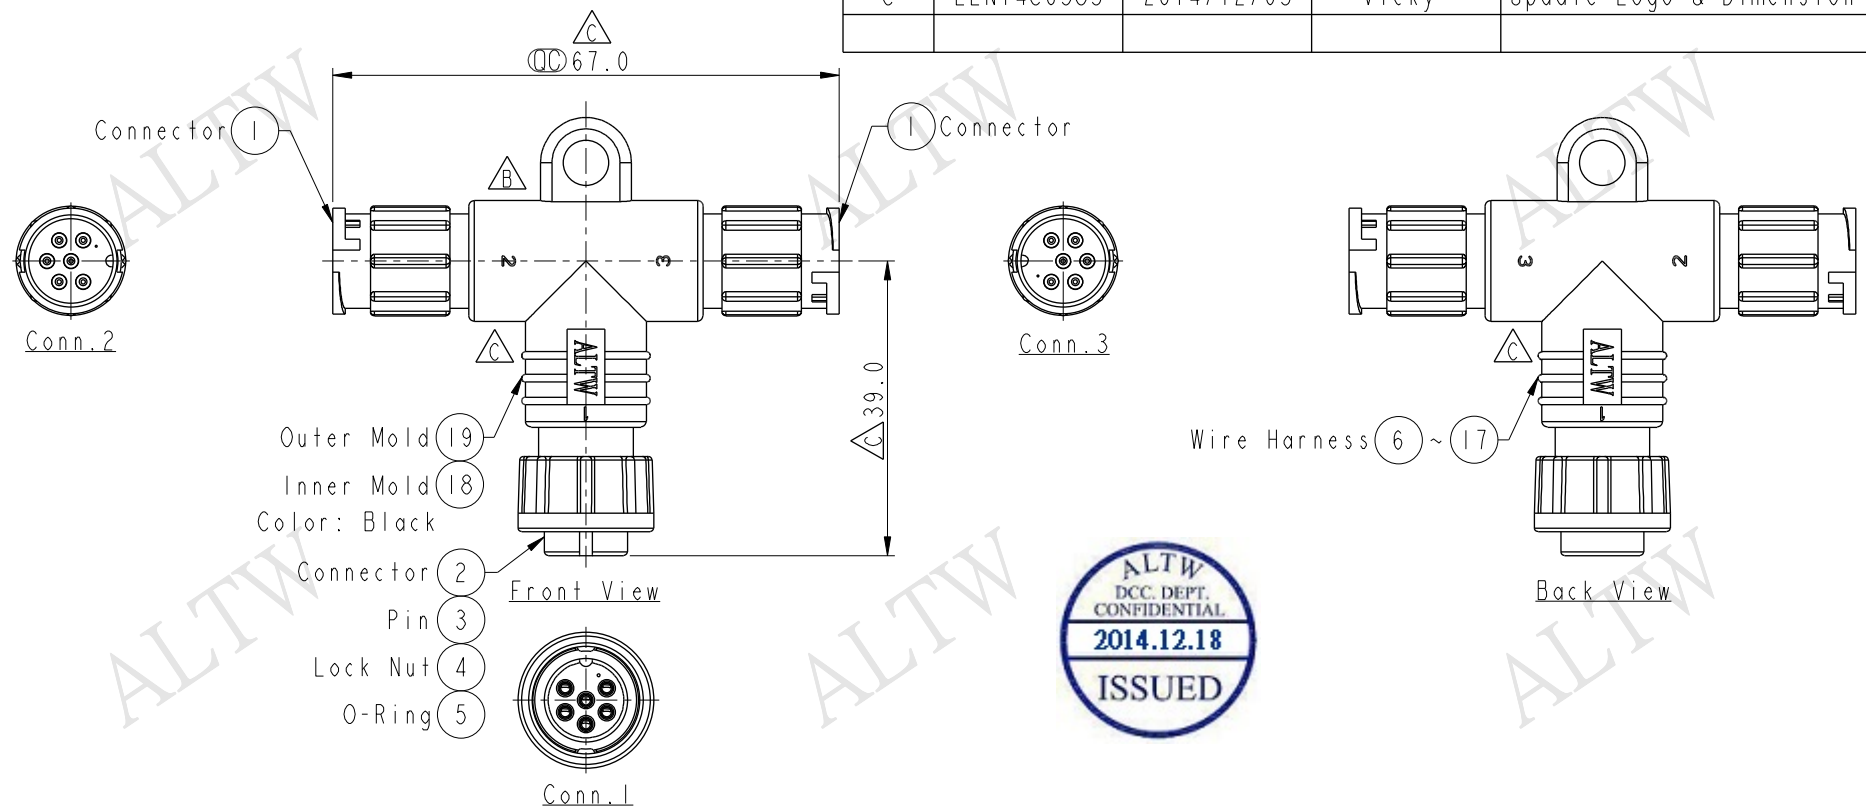

6	6	6	White	白
5	5	5	Red	紅
4	4	4	Orange	橘
3	3	3	Yellow	黃
2	2	2	Green	綠
1	1	1	Blue	藍
Conn.1	Conn.2	Conn.3	Wire Color	



- Note:
- * \varnothing Important Dimension.
 - * Waterproof Rate: IP66
 - * Connector: Nylon+GF, Black
 - * Pin: Copper Alloy, Gold Plated
 - * Lock Nut: Nylon+GF, Black
 - * O-Ring: EPDM, Black
 - * Wire Harness: UL1007 24AWG

UNIT:mm		TOLERANCE		TITLE		Standard T Adaptor Lock 6Pin FMM Conn FMM Pin		Amphenol LTW		ITEM NO		DRAWN BY		DATE	
± 0.5 mm				SCALE		SIZE		SHEET		BA-060606-FMM-TL001		Vicky		2014-12-05	
				REV.		WC-REV.		OF		BA-060606-FMM-TL001		Sam		2014-12-05	
				C		A.2		1		CUSTOMER		Rita		2014-12-05	
										ALTW					

安費諾亮泰企業股份有限公司