


THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

5	6	7	8
REV.	ECN NO.	DATE	SIGN



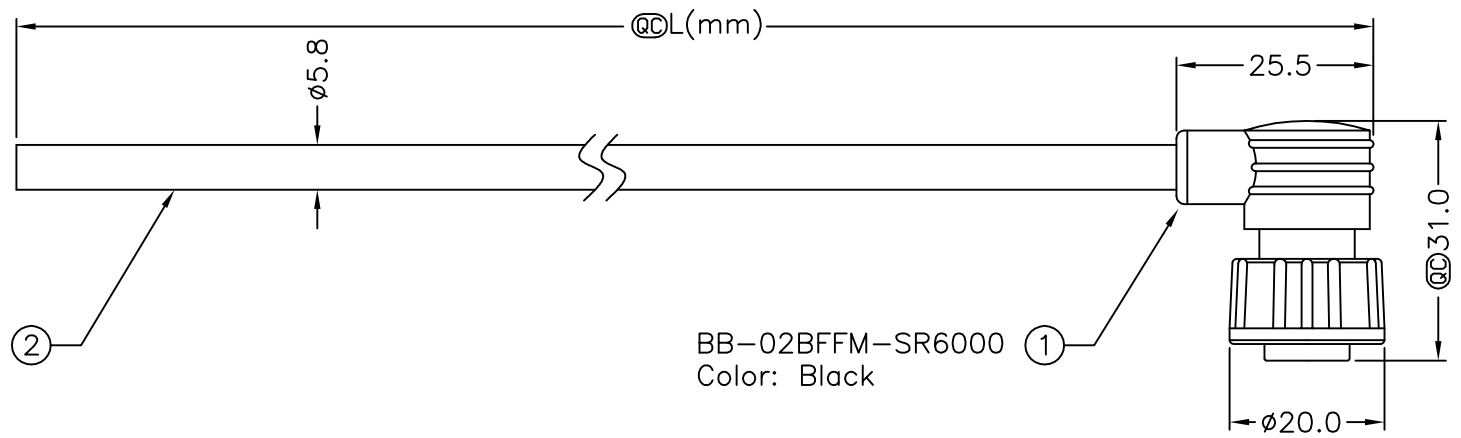


BB-02BFFM-SR6000  
Color: Black

BB-02BFFM-SR6AXX


- XX:01~99Meter
- 01:01Meter
- 02:02Meters
- ⋮
- 99:99Meters

Cable Length(L):01~99Meters



Note:

- \* @C Important Dimension To Check.
- \* Waterproof Rate: IP66
- \* Housing: Black, Nylon+GF
- \* Pin: Copper Alloy, Gold Plated
- \* Cable: Black, UL2464 20AWG\*2C+Drain+Al/My PVC Jacket UV Resistant OD=5.8mm
- \* Cable Length Tolerance:1M~10M±5%mm,11M~99M±500mm.



Pin Assignments  
Front View

2	Red
1	Green
Conn.	Wire Color
	Pin Out

UNIT:mm		TITLE	Standard	ITEM NO	DRAWN BY	DATE
TOLERANCE	±0.5 mm	Cable Screw 2Pin F Conn. F Pin	<b>Amphenol LTW</b>	BB-02BFFM-SR6AXX	Allan Frank Valentino	2007/02/06
		SCALE	Free	CUSTOMER	CHECKED BY	DATE
		REV.	A	ALTW	Robert Dabu	2007/02/12
		SIZE	A4		APPROVED BY	DATE
		SHEET	1 OF 1		Win	2007/02/12
		@C	:Inspection Item			

**Amphenol LTW**  
安費諾亮泰企業股份有限公司