





REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	LEN-8B0417~420	2008/09/10	Shin	Add Note
C	LEN1610164~167	2015/12/04	Ruru	Change Logo & Note
D	LEN1790376~379	2017/09/26	Ruru	Update View

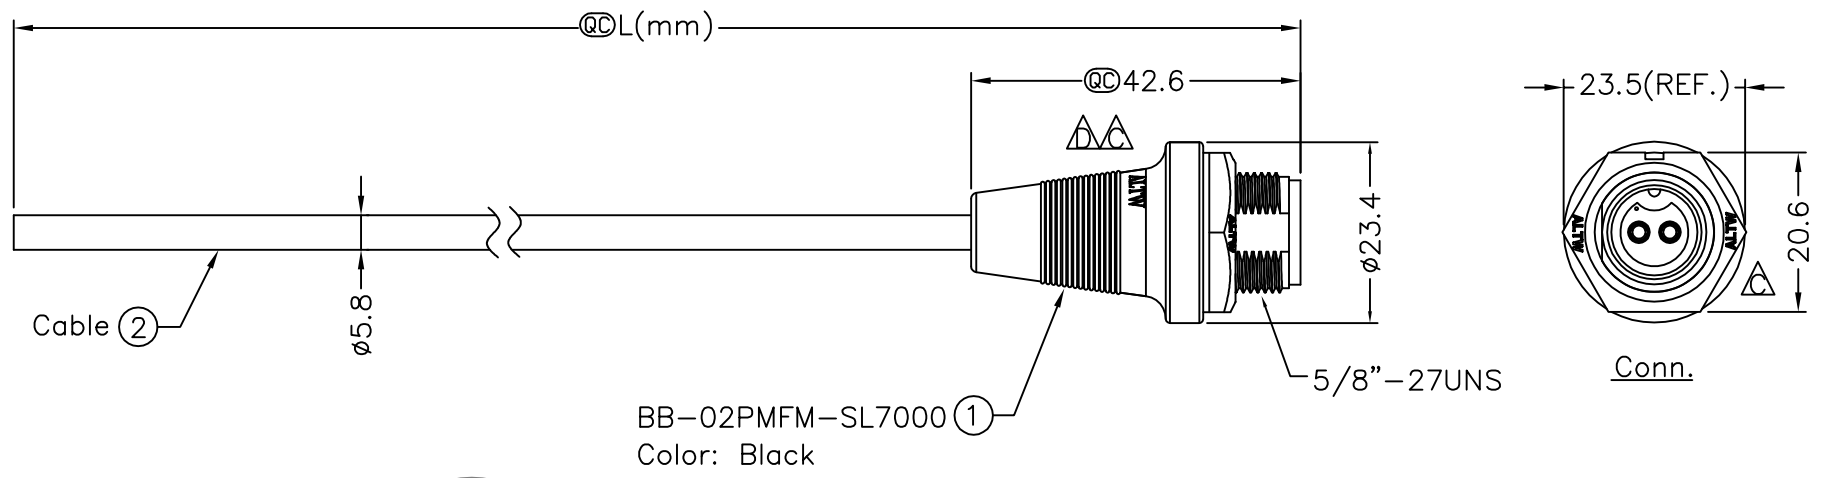

2	Red 紅色
1	Green 綠色
Conn.	Wire Color
Pin Out	

BB-02PMFM-SL7AXX
 XX:01~99Meter
 01:01Meter
 02:02Meters
 ...
 99:99Meters
 Cable Length(L):01~99Meters

- Note:
- * @C Important Dimensions To Check.
 - * Waterproof Rate: IP67
 - * Housing: Nylon+GF, Black
 - * Female Pin: Copper Alloy, Gold Plated
 - * Gasket: EPDM, Black
 - * Nut: Nylon+GF, Black
 - * Cable: UL2464 20AWG*2C+Drain+Al/My, PVC Jacket UV Resistant, OD=5.8, Black
 - * Use with waterproof cap or dust cap
Panel Thickness Max: 2.5mm
 - * Use without waterproof cap or dust cap
Panel Thickness Max: 3.5mm
 - * Cable Length Tolerance: 01M: ±40mm
02M~05M: ±60mm
06M~10M: ±100mm
11M~30M: ±200mm
31M~99M: ±500mm

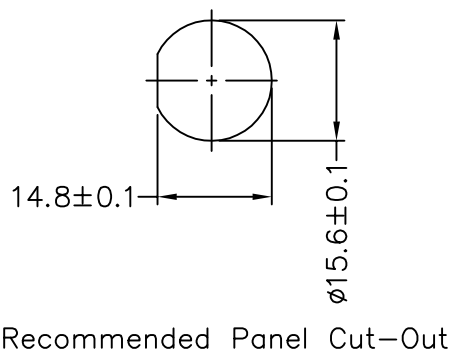

UNIT:mm		TITLE
TOLERANCE	±0.5 mm	Standard,Cable Screw 2Pin M Conn. F Pin
SCALE	Free	SHEET 1 OF 1
REV. D	SIZE A4	@C :Inspection Item

Amphenol LTW
 安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY	DATE
DWG NO	CHECKED BY	DATE
CUSTOMER	APPROVED BY	DATE
BB-02PMFM-SL7AXX	Ruru	2017/09/26
ALTW	Rita	2017/09/26
	Max	2017/09/26

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSED TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.