



REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	LEN-8B0465~468	2008/09/10	Shin	Add Note
C	LEN1610191~194	2015/12/07	Ruru	Change Logo & Note
D	LEN1790380~383	2017/09/27	Ruru	Update View

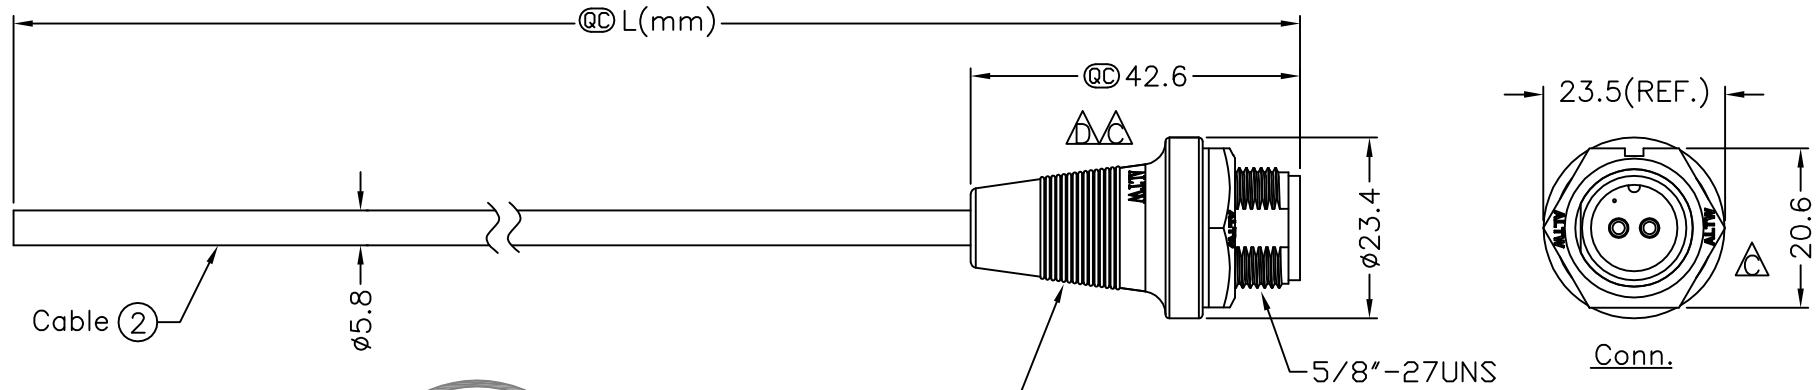


BB-02PMMM-SL7000 (1)
Color: Black

BB-02PMMM-SL7AXX
 XX:01~99Meter
 01:01Meter
 02:02Meters
 ...
 99:99Meters
 Cable Length(L):01~99Meters

- Note:
- * @C Important Dimensions To Check.
 - * Waterproof Rate: IP67
 - * Housing: Black,Nylon+GF
 - * Male Pin: Copper Alloy,Gold Plated
 - * Nut: Black,Nylon+GF
 - * Gasket: Black,EPDM
 - * Cable: UL2464 20AWG*2C+Drain+Al/My Black,UV Resistant,OD=5.8
 - △* Use with waterproof cap or dust cap Panel Thickness Max: 2.5mm
 - △* Use without waterproof cap or dust cap Panel Thickness Max: 3.5mm
 - △* Cable Length Tolerance: 01M: ±40mm
 02M~05M: ±60mm
 06M~10M: ±100mm
 11M~30M: ±200mm
 31M~99M: ±500mm

2	Red	紅色
1	Green	綠色
Conn.	Wire Color	
Pin Out		

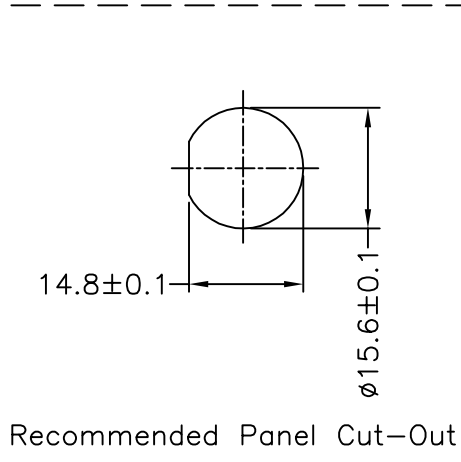

UNIT:mm	
TOLERANCE	±0.5 mm

TITLE		Standard,Cable Screw 2Pin M Conn. M Pin	
SCALE	Free	SHEET	1 OF 1
REV.	D	SIZE	A4
		QC :Inspection Item	

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO	
DWG NO	BB-02PMMM-SL7AXX
CUSTOMER	ALTW

DRAWN BY	Ruru
CHECKED BY	Rtia
APPROVED BY	Max

DATE	2017/09/27
DATE	2017/09/27
DATE	2017/09/27

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.