


REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	LEN1660135~138	2016/05/26	Ruru	Change Logo & Note




BB-03AFMM-SL6000 ①  
Color: Black

BB-03AFMM-SL6AXX  
 XX:01~99Meter  
 01:01Meter  
 02:02Meters  
 :  
 :  
 99:99Meters  
 Cable Length(L):01~99Meters

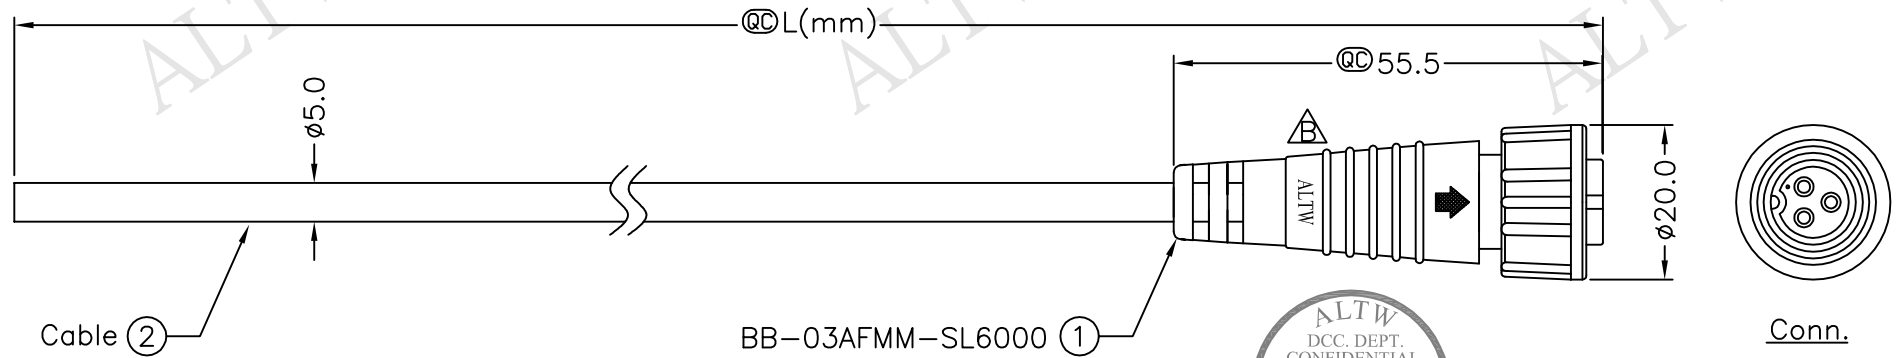

- Note:
- \* @C Important Dimension To Check.
  - \* Waterproof Rate: IP66
  - \* Housing: Nylon+GF, Black
  - \* Pin: Copper Alloy, Gold Plated
  - \* Cable: UL2464 20AWG\*3C+Al/My, PVC Jacket, UV Resistant, OD=5.0mm, Black
  - \* Cable Length Tolerance: 01M: ±40mm  
 02M~05M: ±60mm  
 06M~10M: ±100mm  
 11M~30M: ±200mm  
 31M~99M: ±500mm



Pin Assignments  
Front View

3	Yellow
2	White
1	Black
Conn.	Wire Color
Pin Out	

UNIT:mm	
TOLERANCE	±0.5 mm

TITLE	Standard		
	Cable Screw 3Pin F Conn. M Pin		
SCALE	Free	SHEET	1 OF 1
REV.	B	SIZE	A4
		@C	:Inspection Item

**Amphenol LTW**  
安費諾亮泰企業股份有限公司

ITEM NO	
DWG NO	BB-03AFMM-SL6AXX
CUSTOMER	ALTW

DRAWN BY	Ruru	DATE	2016/05/26
CHECKED BY	Rita	DATE	2016/05/26
APPROVED BY	Lisa	DATE	2016/05/26

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.