



REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	LEN-8B0297~300	2008/09/10	Shin	Add Note
C	LEN1610174~177	2015/12/04	Ruru	Change Logo & Note
D	LEN1650310~313	2016/05/10	Ruru	Modify Logo Position

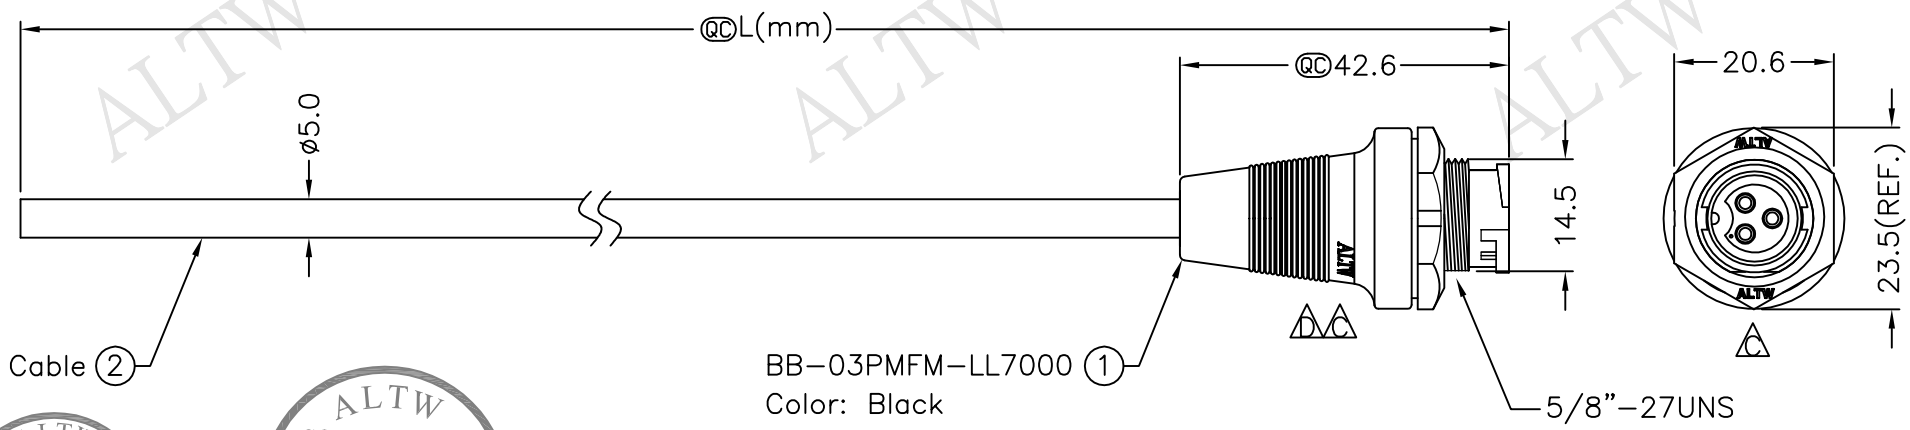


BB-03PMFM-LL7000
Color: Black

BB-03PMFM-LL7AXX
XX:01~99Meter
01:01Meter
02:02Meters
:
:
:
99:99Meters
Cable Length(L):01~99Meters

- Note:
- * @C Important Dimension To Check.
 - * Waterproof Rate: IP67
 - * Housing: Black, Nylon+GF
 - * Pin: Copper Alloy, Gold Plated
 - * Cable: Black, UL2464 20AWG*3C+Al/My PVC Jacket (UV Resistant) OD=5.0
 - * Use with waterproof cap or dust cap
Panel Thickness Max: 2.5mm
 - * Use without waterproof cap or dust cap
Panel Thickness Max: 3.5mm
 - * Cable Length Tolerance: 01M: ±40mm
02M~05M: ±60mm
06M~10M: ±100mm
11M~30M: ±200mm
31M~99M: ±500mm



Pin Assignments
Front View

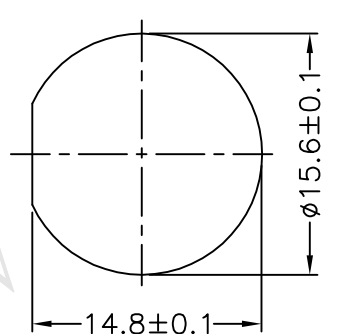

Recommended Panel Cut-Out

3	Yellow	黃
2	White	白
1	Black	黑
Conn.	Wire Color	
Pin Out		

UNIT:mm		TOLERANCE		TITLE		SHEET		Amphenol LTW		ITEM NO		DRAWN BY		DATE	
±0.5 mm		Free		Standard Cable Lock 3Pin M Conn. F Pin		1 OF 1		安費諾亮泰企業股份有限公司		BB-03PMFM-LL7AXX		Ruru		2016/05/10	
REV. D		SIZE A4		@C :Inspection Item						CUSTOMER ALTW		CHECKED BY Rita		DATE 2016/05/10	
												APPROVED BY Lisa		DATE 2016/05/10	

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.