



5	6	7	8
REV. B	ECN NO. LEN1660143~146	DATE 2016/05/26	SIGN Ruru
			DESCRIPTION Change Logo & Note

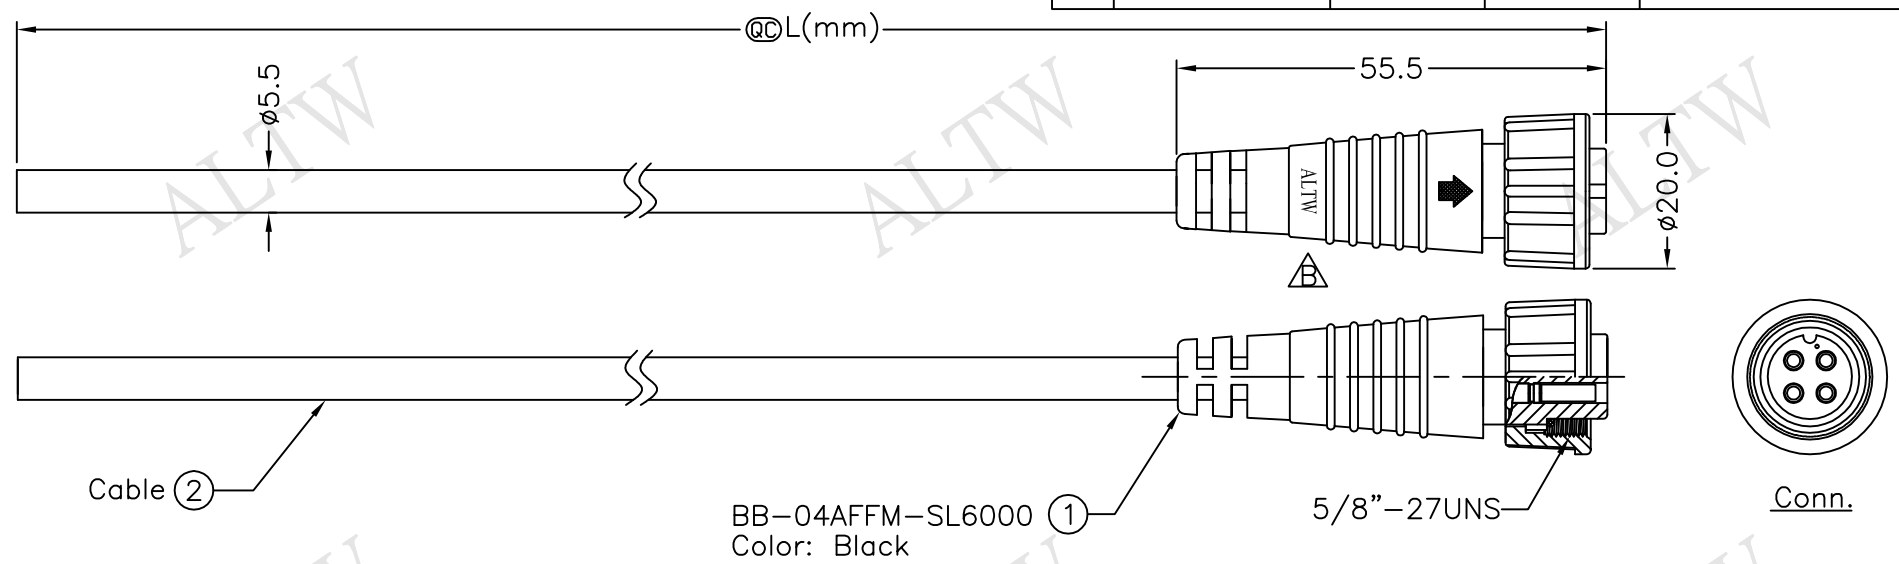


BB-04AFFM-SL6AXX
 XX:01~99Meter
 01:01Meter
 02:02Meters
 :
 :
 99:99Meters
 Cable Length(L):01~99Meters

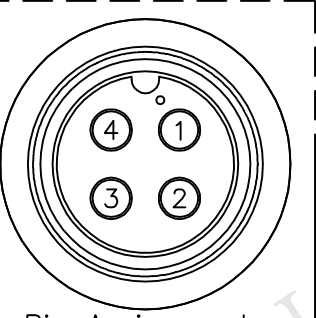

4	White
3	Black
2	Blue
1	Brown
Conn.	Wire Color
	Pin Out

- Note:
- * @C Important Dimension To Check.
 - * Waterproof Rate: IP66
 - * Housing: Nylon+GF, Black
 - * Female Pin: Copper Alloy, Gold Plated
 - * Cable: UL2464 20AWG*4C+Drain+Al/My, PVC Jacket UV Resistant, OD=5.5mm, Black
 - * Cable Length Tolerance: 01M: ±40mm
 02M~05M: ±60mm
 06M~10M: ±100mm
 11M~30M: ±200mm
 31M~99M: ±500mm



UNIT:mm	
TOLERANCE	±0.5 mm

TITLE	Standard Cable Screw 4Pin F Conn F Pin		
SCALE	Free	SHEET 1 OF 1	
REV. B	SIZE A4	@C :Inspection Item	

Amphenol LTW
 安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY Ruru	DATE 2016/05/26
DWG NO BB-04AFFM-SL6AXX	CHECKED BY Rita	DATE 2016/05/26
CUSTOMER ALTW	APPROVED BY Lisa	DATE 2016/05/26

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

F
E
D
C
B
A

1 2 3 4 5 6 7 8